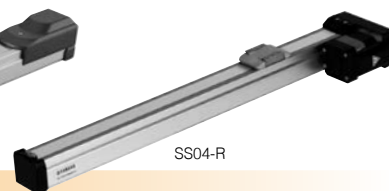


SS04

Slider type
CE compliance
Origin on the non-motor side is selectable


SS04-S



SS04-R

Ordering method

SS04

Model	Lead	Model	Brake	Origin position	Grease option	Stroke	Cable length ^{Note 1}
	12: 12mm 06: 6mm 02: 2mm	S: Straight model R: Space-saving model (motor installed on right) L: Space-saving model (motor installed on left)	N: With no brake B: With brake	N: Standard ^{Note 1} Z: Non-motor side	N: Standard grease C: Clean room grease	50 to 400 (50mm pitch)	1K: 1m 3K: 3m 5K: 5m 10K: 10m

S2

Robot positioner	I/O
S2: TS-S2 ^{Note 3}	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}

SH

Robot positioner	I/O	Battery
SH: TS-SH	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}	B: With battery (Absolute) N: None (Incremental)

SD

Robot driver	I/O cable
SD: TS-SD	1: 1m

Note 1. If changing from the origin position at the time of purchase, the machine reference amount must be reset. For details, refer to the manual.

Note 2. The robot cable is flexible and resists bending.

Note 3. See P.600 for DIN rail mounting bracket.



Note 4. Select this selection when using the gateway function.

Basic specifications




Motor	42 □ Step motor		
Resolution (Pulse/rotation)	20480		
Repeatability ^{Note 1} (mm)	+/-0.02		
Deceleration mechanism	Ball screw φ8		
Maximum motor torque (N·m)	0.27		
Ball screw lead (mm)	12	6	2
Maximum speed (mm/sec)	600	300	100
Maximum payload (kg)	Horizontal	2	4
	Vertical	1	2
Max. pressing force (N)	45	90	150
Stroke (mm)	50 to 400 (50mm pitch)		
Overall length (mm)	Horizontal	Stroke+216	
	Vertical	Stroke+261	
Maximum outside dimension of body cross-section (mm)	W49 × H59		
Cable length (m)	Standard: 1 / Option: 3, 5, 10		

Note 1. Positioning repeatability in one direction.

Motor installation (Space-saving model)

R type Motor installed on right

L type Motor installed on left


Allowable overhang ^{Note}



Horizontal installation (Unit: mm)				
	A	B	C	
Lead 12	1kg 807	218	292	
	2kg 667	107	152	
Lead 6	2kg 687	116	169	
	3kg 556	76	112	
Lead 2	4kg 567	56	84	
	4kg 869	61	92	
Lead 2	6kg 863	40	60	

Wall installation (Unit: mm)				
	A	B	C	
Lead 12	1kg 274	204	776	
	2kg 133	93	611	
Lead 6	2kg 149	102	656	
	3kg 92	62	516	
Lead 2	4kg 63	43	507	
	4kg 72	48	829	
Lead 2	6kg 39	29	789	

Vertical installation (Unit: mm)			
	A	C	
Lead 12	0.5kg 407	408	
	1kg 204	204	
Lead 6	1kg 223	223	
	2kg 107	107	
Lead 2	2kg 118	118	
	4kg 53	53	

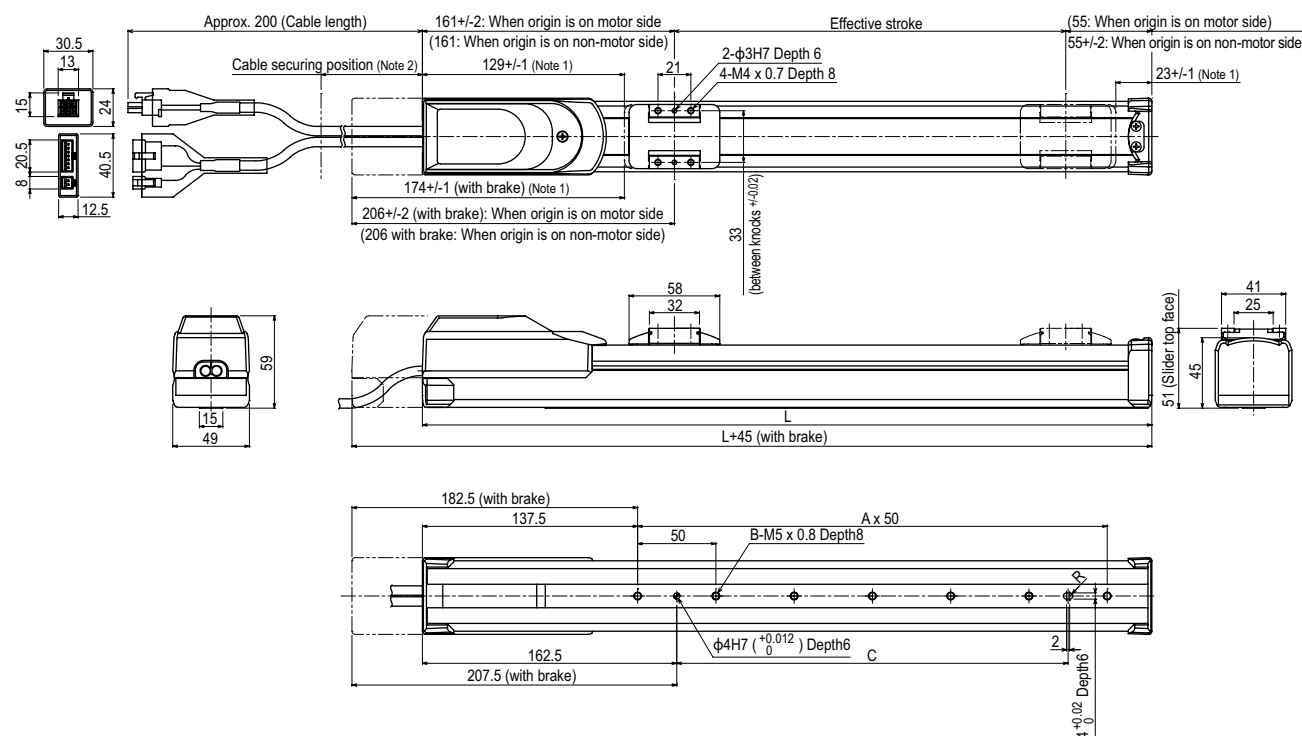
Static loading moment

(Unit: N·m)			
MY	MP	MR	
16	19	17	

Controller

Controller	Operation method
TS-S2	I/O point trace /
TS-SH	Remote command
TS-SD	Pulse train control

SS04 Straight model **S**



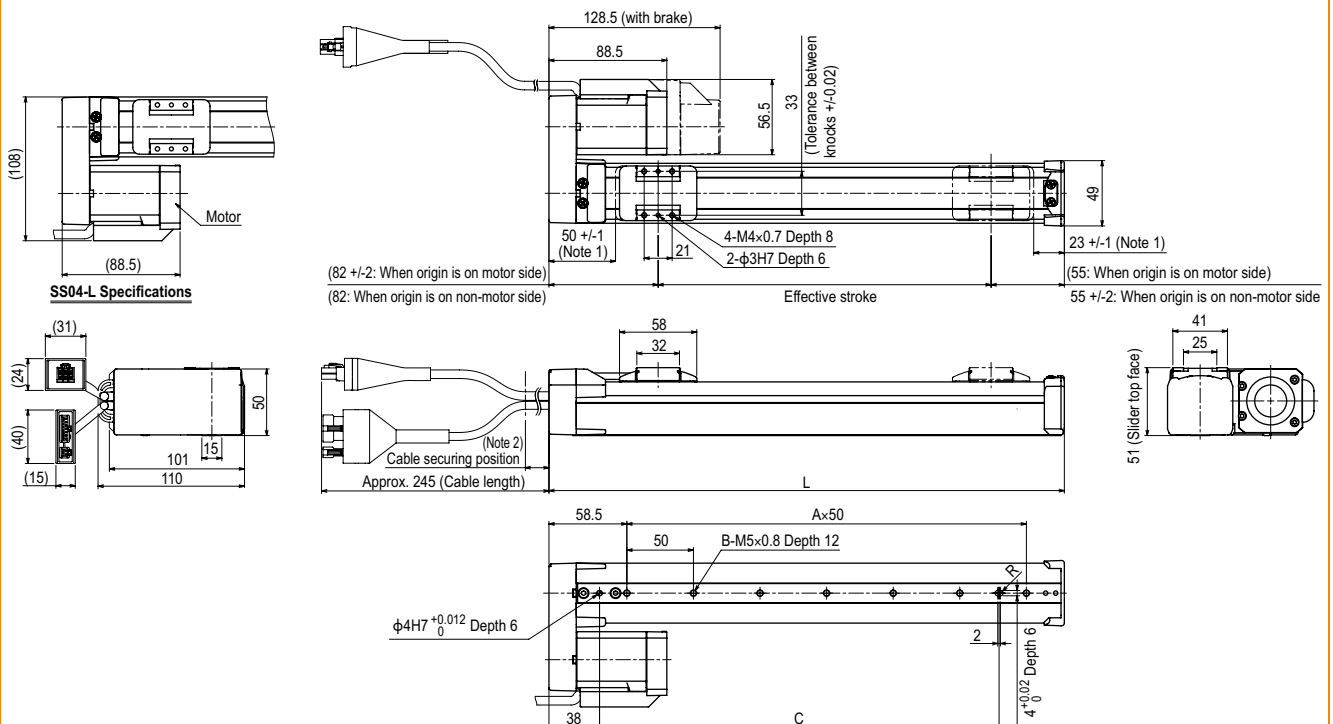
Effective stroke	50	100	150	200	250	300	350	400
L	266	316	366	416	466	516	566	616
A	2	3	4	5	6	7	8	9
B	3	4	5	6	7	8	9	10
C	50	100	150	200	250	300	350	400
Weight (kg) ^{Note 4}	1.5	1.6	1.7	1.8	2.0	2.1	2.2	2.3

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.

Note 3. The cable's minimum bend radius is R30.

Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.

SS04 Space-saving model **R** **L**

Effective stroke	50	100	150	200	250	300	350	400
L	187	237	287	337	387	437	487	537
A	2	3	4	5	6	7	8	9
B	3	4	5	6	7	8	9	10
C	100	150	200	250	300	350	400	450
Weight (kg) ^{Note 4}	1.2	1.4	1.5	1.6	1.7	1.8	1.9	2.1

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Secure the cable with a tie-band 80mm or less from unit's end face to prevent the cable from being subjected to excessive loads.

Note 3. The cable's minimum bend radius is R30.

Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.

Note 5. The belt cover's left and right sides are asymmetrical. Therefore, if the motor mounting orientation is changed, the cover cannot be attached.