

YP330X 3 axes



Ordering method

YP330X

RCX340-3

Model	Cable length	Controller / Number of controllable axes	Safety standard	Option A (OP.A)	Option B (OP.B)	Option C (OP.C)	Option D (OP.D)	Option E (OP.E)	Absolute battery
	3L: 3.5m 5L: 5m 10L: 10m								

Specify various controller setting items. RCX340 ▶ **P.678**

Specifications


	X axis	Y axis	Z axis
AC servo motor output (W)	200	200	200
Repeatability ^{Note 1} (mm)	+/-0.02	+/-0.02	+/-0.05
Drive system	Ball screw φ15	Ball screw φ15	Timing belt
Deceleration ratio (mm)	Equivalent to lead 20	Equivalent to lead 20	Equivalent to lead 25
Maximum speed ^{Note 2} (mm/sec)	1500	1000	1500
Moving range (mm)	330	150	100
Cycle time (sec)	0.57 ^{Note 3} , 0.78 ^{Note 4}		
Maximum payload (kg)	3		
Robot cable length (m)	Standard: 3.5 Option: 5,10		
Weight (kg)	32		

Note 1. Positioning repeatability precision in a single swing when residual vibration is stabilized (variable depending on the load and stroke).
 Note 2. When the moving stroke is short, the maximum speed may not be reached.
 Note 3. Reciprocating time in vertical direction (50mm) and longitudinal direction (150mm) with the arch amount of 50 (when executing rough-positioning arch motion with 1kg load).
 Note 4. Reciprocating time in vertical direction (25mm) and longitudinal direction (300mm) with the arch amount of 25 (when executing rough-positioning arch motion with 1kg load).

Controller

Controller	Power consumption (VA)	Operating method
RCX340	700	Programming / I/O point trace / Remote command / Operation using RS-232C communication

YP330X

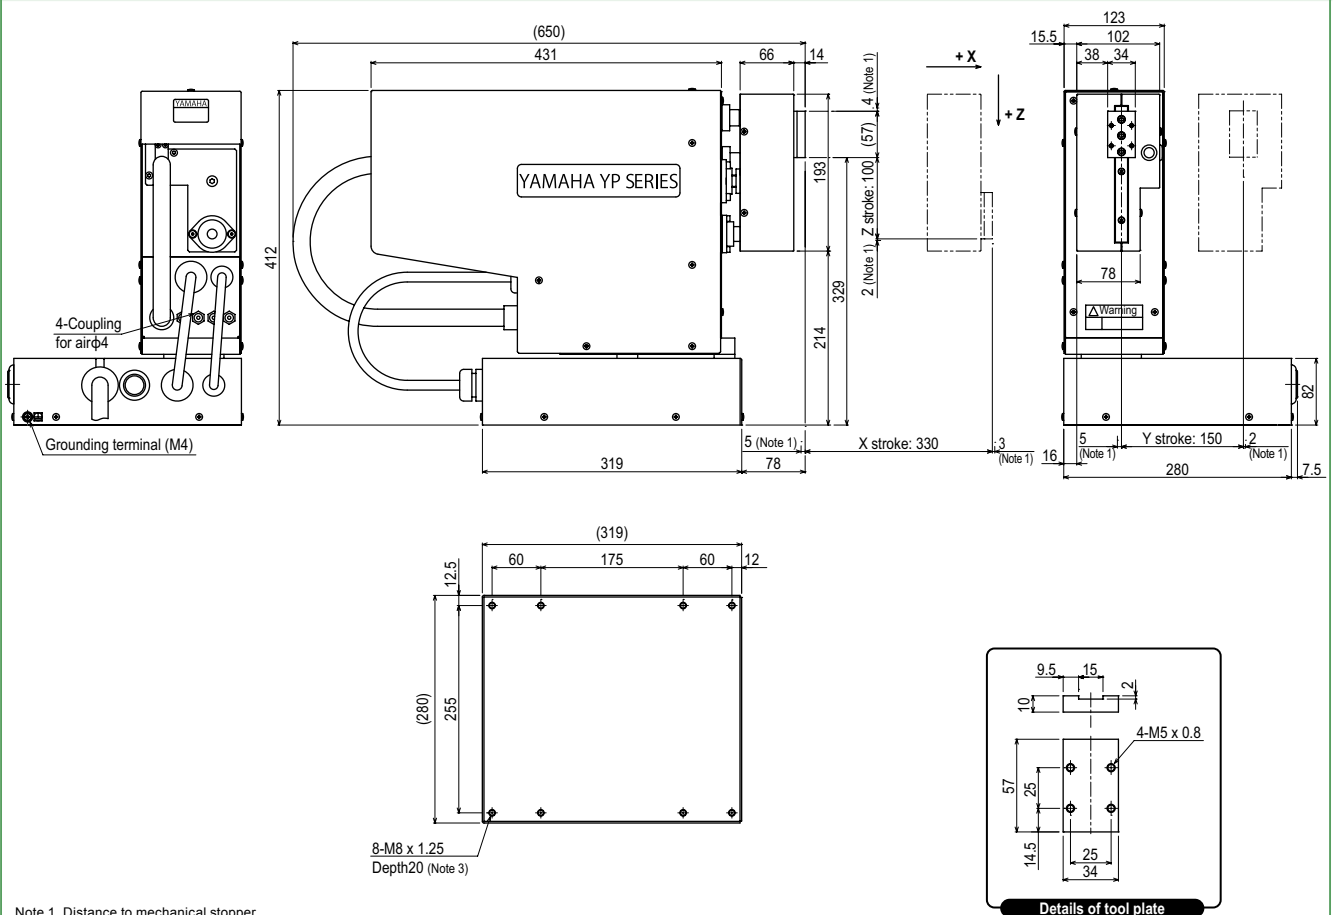

Note 1. Distance to mechanical stopper.
 Note 2. Return-to-origin on the YP330X is by absolute reset. So the origin position must be set the first time (making initial settings) but after that is not required.
 Note 3. Do not use bolts longer than 20mm (robot bottom plate thickness).

Articulated robots
YA

Linear conveyor modules
LCM

Single-axis robots
CX

Motor-less single axis actuator
Robonity

Compact single-axis robots
TRANSEVO

Single-axis robots
FLIP-X

Linear motor single-axis robots
PHASER

Cartesian robots
XY-X

SCARA robots
YK-X

Pick & place robots
YP-X

CLEAN CONTROLLER INFORMATION

2-axes

3-axes

4-axes