

Handy terminal

HT1/HT1-D

▼Applicable controllers

TS-S2
TS-SH
TS-X
TS-P


P.626

This Handy Terminal is a device that can perform any operation such as robot manual operation, point data edit, teaching, and parameter setting, etc. Has graphic LCD display with backlight for easy viewing.

■ HT1 / HT1-D basic specifications

Name		HT1	HT1-D
External view			
Applicable controllers		TS-S2 / TS-SH / TS-X / TS-P	
Model	Japanese specifications	KCA-M5110-0J(3.5m) KCA-M5110-6J(10m)	KCA-M5110-1J(3.5m) KCA-M5110-7J(10m)
	English specifications	KCA-M5110-0E(3.5m) KCA-M5110-6E(10m)	KCA-M5110-1E(3.5m) KCA-M5110-7E(10m)
Display		Dot matrix monochrome display (with backlighting) 32 characters × 10 lines	
Operation keys		Mechanical switch	
Emergency stop button		Normally closed contact point (with lock function)	
Enable switch		-	3-position
Safety connector		-	15 pin D-sub connector (male)
CE marking		Not supported	Applicable
Operating temperature		0°C to 40°C	
Operating humidity		35% to 85%RH (non-condensing)	
Dimensions		W88 × H191 × D45mm (Emergency stop button not included.)	
Weight		260g (not including cable)	300g (not including cable)
Cable length		3.5m / 10m	

■ Part names and function

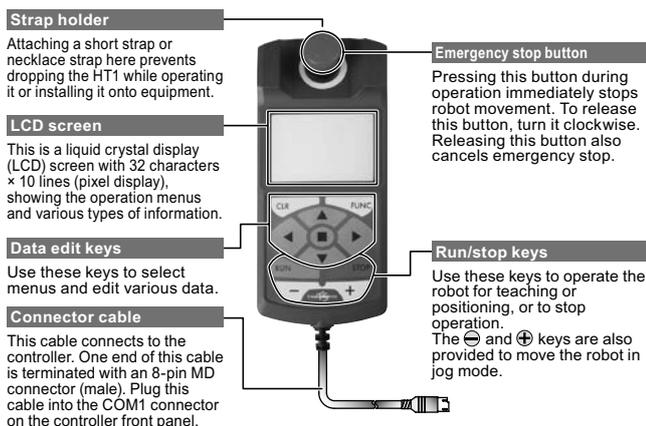

■ HT1-D rear side

