

SRD05

Rod type (With support guide)



- CE compliance
- Origin on the non-motor side is selectable: Lead 6, 12

Ordering method

SRD05

Model	Lead	Model	Brake	Origin position	Bracket plate	Stroke	Cable length
	12: 12mm 06: 6mm 02: 2mm	S: Straight model J: Space-saving model (motor installed on top)	N: With no brake B: With brake	N: Standard Z: Non-motor side	N: No plate H: With plate	50 to 300 (50mm pitch)	Note 4 1K: 1m 3K: 3m 5K: 5m 10K: 10m

S2

Robot positioner	I/O
S2: TS-S2	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board

SH

Robot positioner	I/O	Battery
SH: TS-SH	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board	B: With battery (Absolute) N: None (Incremental)

SD

Robot driver	I/O cable
SD: TS-SD	f: 1m

Note 1. See P.255 for grease gun nozzles.
 Note 2. When "2mm lead" is selected, the origin position cannot be changed (to non-motor side).
 Note 3. If changing from the origin position at the time of purchase, the machine reference amount must be reset. For details, refer to the manual.


Note 4. The robot cable is flexible and resists bending.
 Note 5. See P.634 for DIN rail mounting bracket.
 Note 6. Select this selection when using the gateway function. For details, see P.96.

Basic specifications

Motor	56 □ Step motor		
Resolution (Pulse/rotation)	20480		
Repeatability (mm)	±0.02		
Deceleration mechanism	Ball screw φ12		
Ball screw lead (mm)	12	6	2
Maximum speed (mm/sec)	300	150	50
Maximum payload (kg)	Horizontal	Vertical	
	50	55	60
	8.5	18.5	28.5
Max. pressing force (N)	250	550	900
Stroke (mm)	50 to 300 (50pitch)		
Lost motion	0.1mm or less		
Rotating backlash (°)	±0.05		
Overall length (mm)	Horizontal	Vertical	
	Stroke+276	Stroke+316	
Maximum outside dimension of body cross-section (mm)	W56.4 × H71		
Cable length (m)	Standard: 1 / Option: 3, 5, 10		


Note 1. The maximum speed needs to be changed in accordance with the payload.
 See the "Speed vs. payload" graph shown on the right.
 For details, see P. 254.

Speed vs. payload

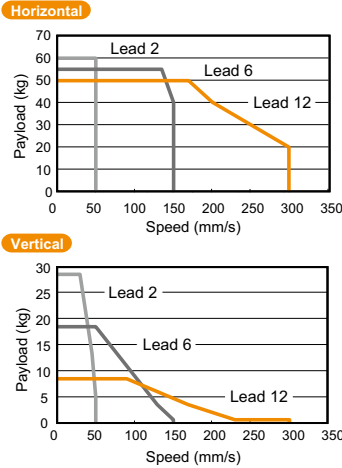

Running life

5000 km on models other than shown below.
 Running life of only the model shown below becomes shorter than 5000 km depending on the payload, so check the running life curve.

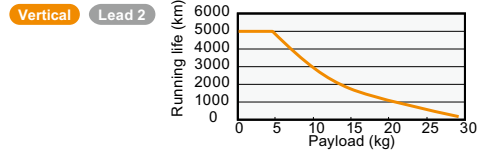


Note. See P.255 for running life distance to life time conversion example.

Controller



Controller	Operation method	Controller	Operation method
TS-S2	I/O point trace / Remote command	TS-SD	Pulse train control
TS-SH			

SRD05 Straight model S

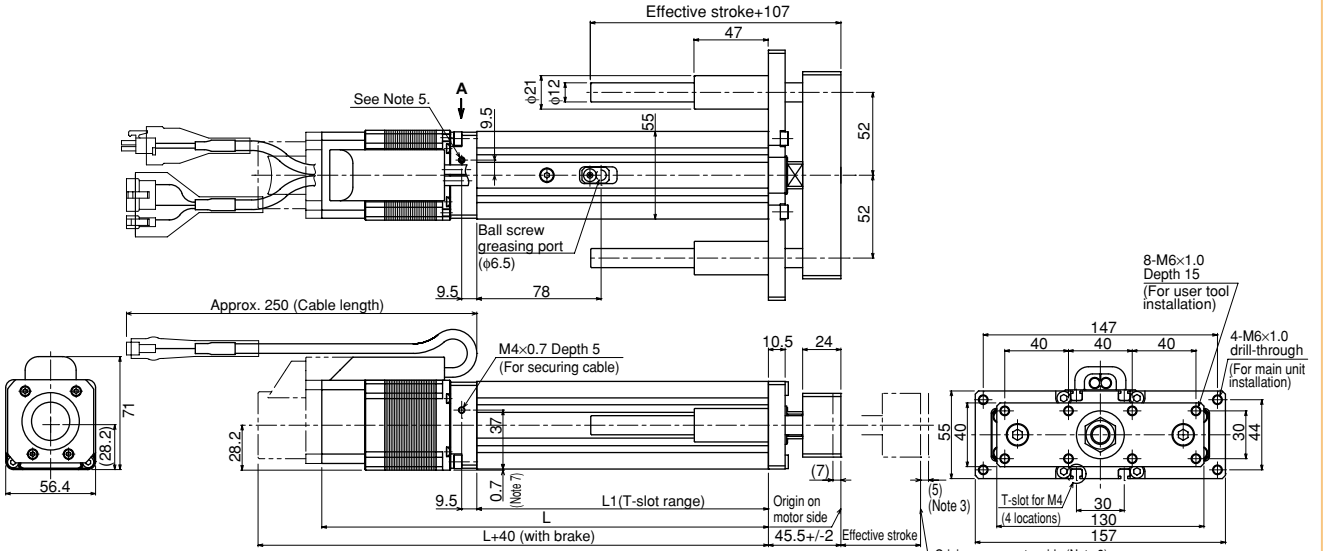

Option: Horizontal installation plate (foot)

* Contents of option: Plate, 2 pcs., Nut, 8 pcs.
 See our robot manuals for additional settings.

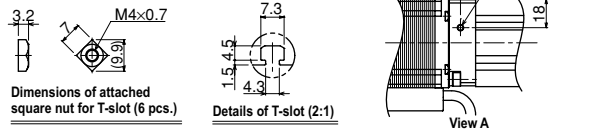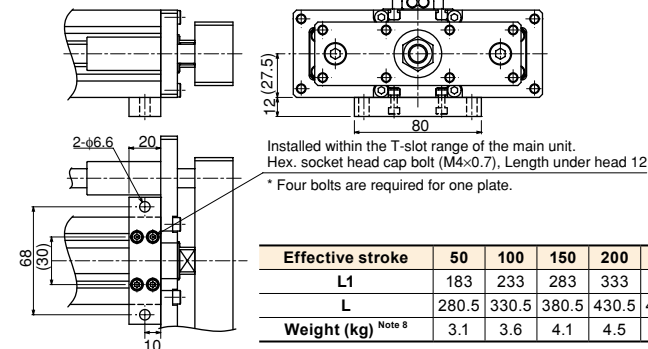

Note 1. It is possible to apply only the axial load.
 Use the external guide together so that any radial load is not applied to the rod.
 Note 2. For lead 2mm specifications, the origin on the non-motor side cannot be set.
 Note 3. When the lead is 2mm, this dimension is 27mm.
 Note 4. When running the cables, secure cables so that any load is not applied to them.
 Note 5. Remove the M4 hex. socket head cap set bolts and use them to secure the cables. (Effective screw thread depth 5)
 Note 6. The cable's minimum bend radius is R30.
 Note 7. Take great care as the outer case of the motor projects from the bottom of the main unit.
 Note 8. Models with a brake will be 0.2kg heavier.
 Note 9. Distance to mechanical stopper.

Effective stroke	50	100	150	200	250	300
L1	183	233	283	333	383	433
L	280.5	330.5	380.5	430.5	480.5	530.5
Weight (kg)	3.1	3.6	4.1	4.5	5.0	5.5

SRD05 Space-saving model (motor installed on top) **U**

