

F8L

- High lead: Lead 30
- Origin on the non-motor side is selectable

Ordering method

F8L

Model	Lead designation	Brake	Origin position change	Grease type	Stroke	Cable length
	30: 30mm 20: 20mm 10: 10mm 5: 5mm	No entry: No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	150 to 1050 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

TSX

Positioner	Driver: Power supply voltage / Power capacity	LCD monitor	I/O selection	Battery
TS-X	105: 100V/100W or less 205: 200V/100W or less	No entry: None L: With LCD	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board	B: With battery (Absolute) N: None (Incremental)

SR1-X

05

Controller	Driver: Power capacity	Usable for CE	I/O selection	Battery
SR1-X	05: 100W or less	No entry: Standard E: CE marking	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)

RDV-X

2

Driver	Power supply voltage	Driver: Power capacity	Regenerative unit
RDV-X	2: AC200V	05: 100W or less	RBR1


- Note 1. The model with a lead of 30mm cannot select specifications with brake (vertical specifications).
 Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 3. See P.498 for DIN rail mounting bracket.
 Note 4. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100				
Repeatability (mm)	+/-0.01				
Deceleration mechanism	Ball screw (Class C7)				
Ball screw lead (mm)	30	20	10	5	
Maximum speed (mm/sec)	1800	1200	600	300	
Maximum payload (kg)	Horizontal	7	20	40	50
	Vertical	-	4	8	16
Rated thrust (N)	Horizontal	56	84	169	339
	Vertical	-	-	-	-
Stroke (mm)	150 to 1050 (50mm pitch)				
Overall length (mm)	Horizontal	Stroke+300	Stroke+292		
	Vertical	Stroke+322			
Maximum dimensions of cross section of main unit (mm)	W80 x H65				
Cable length (m)	Standard: 3.5 / Option: 5, 10				
Linear guide type	4 rows of circular arc grooves x 1 rail				
Position detector	Resolvers				
Resolution (Pulse/rotation)	16384				

- Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 650mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
 Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.


Allowable overhang



Lead	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)		
	A	B	C	A	B	C	A	B	C
Lead 30	5kg: 112	80	80	5kg: 55	57	77	2kg: 236	240	
Lead 20	7kg: 78	43	49	7kg: 21	19	34	4kg: 106	110	
	5kg: 211	108	147	5kg: 119	89	176	2kg: 310	311	
Lead 10	10kg: 116	45	69	10kg: 38	26	69	4kg: 141	143	
	15kg: 76	24	39	15kg: 7	0	16	6kg: 85	86	
Lead 5	20kg: 58	14	26	20kg: 0	0	0	8kg: 57	58	
	10kg: 251	56	122	10kg: 85	39	202	5kg: 123	124	
Lead 30	20kg: 121	20	46	20kg: 7	0	30	10kg: 47	48	
	30kg: 74	8	20	30kg: 0	0	0	15kg: 22	22	
Lead 20	40kg: 35	0	6	40kg: 0	0	0	16kg: 19	19	
	20kg: 249	23	62	20kg: 19	7	140			
Lead 10	30kg: 170	10	29	30kg: 0	0	0			
	40kg: 138	4	12	40kg: 0	0	0			
Lead 5	50kg: 51	0	0	50kg: 0	0	0			

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment




(Unit: N·m)		
MY	MP	MR
70	95	110

Controller

Controller	Operation method
SR1-X05	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221/222	
RCX240/340	
TS-X105	I/O point trace / Remote command
TS-X205	
RDV-X205-RBR1	Pulse train control


F8L

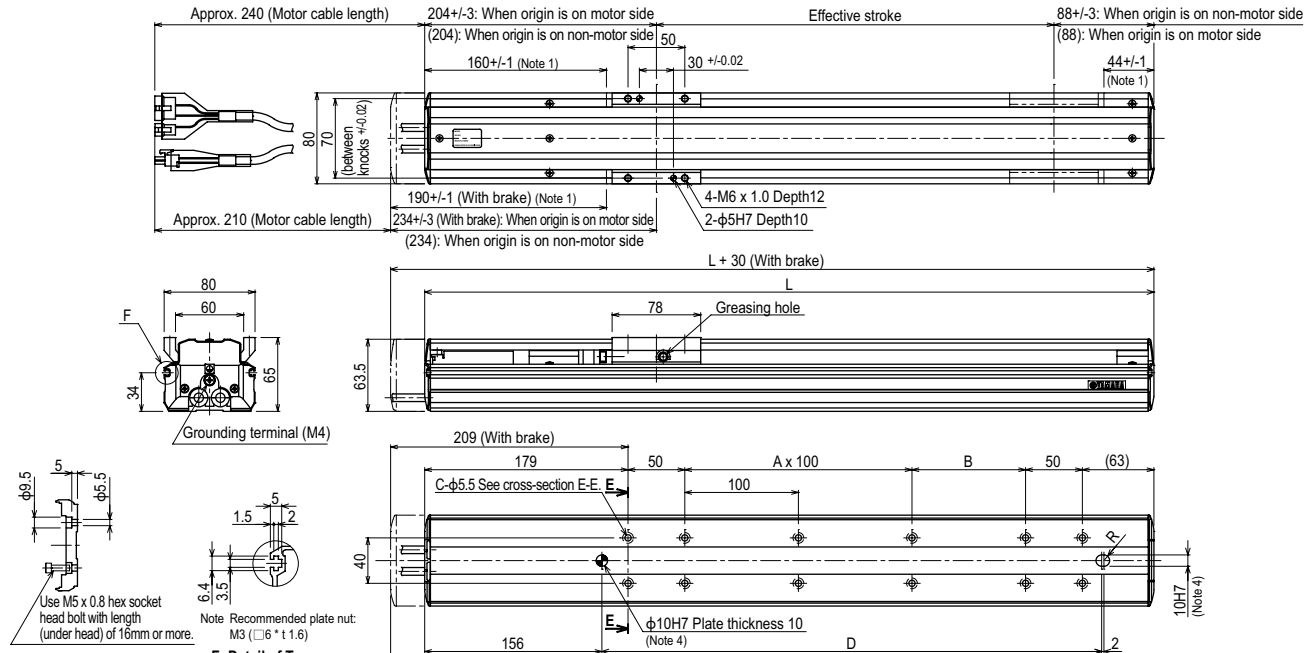

Effective stroke	Cross-section E-E									
	150	200	250	300	350	400	450	500	550	600
L	442	492	542	592	642	692	742	792	842	892
A	0	0	1	1	2	2	3	3	4	4
B	100	150	100	150	100	150	100	150	100	150
C	8	8	10	10	12	12	14	14	16	16
D	240	290	340	390	440	490	540	590	640	690
Weight (kg)	Note 5									
	Lead 20	3.9	4.2	4.5	4.8	5.1	5.4	5.7	6.1	6.4
Maximum speed (mm/sec)	Note 6									
	Lead 10									
	Lead 5									
Speed setting	Note 6									

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When installing the robot, do not use washers inside the robot body.
 Note 3. Minimum bend radius of motor cable is R50.
 Note 4. When using this φ10 knock-pin hole to position the robot body, the knockpin must not protrude more than 10mm inside the robot body.
 Note 5. Weight of models with no brake. The weight of brake-attached models is 0.3 kg heavier than the models with no brake shown in the table.
 Note 6. When the stroke is longer than 650mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

F8L High lead type: Lead 30

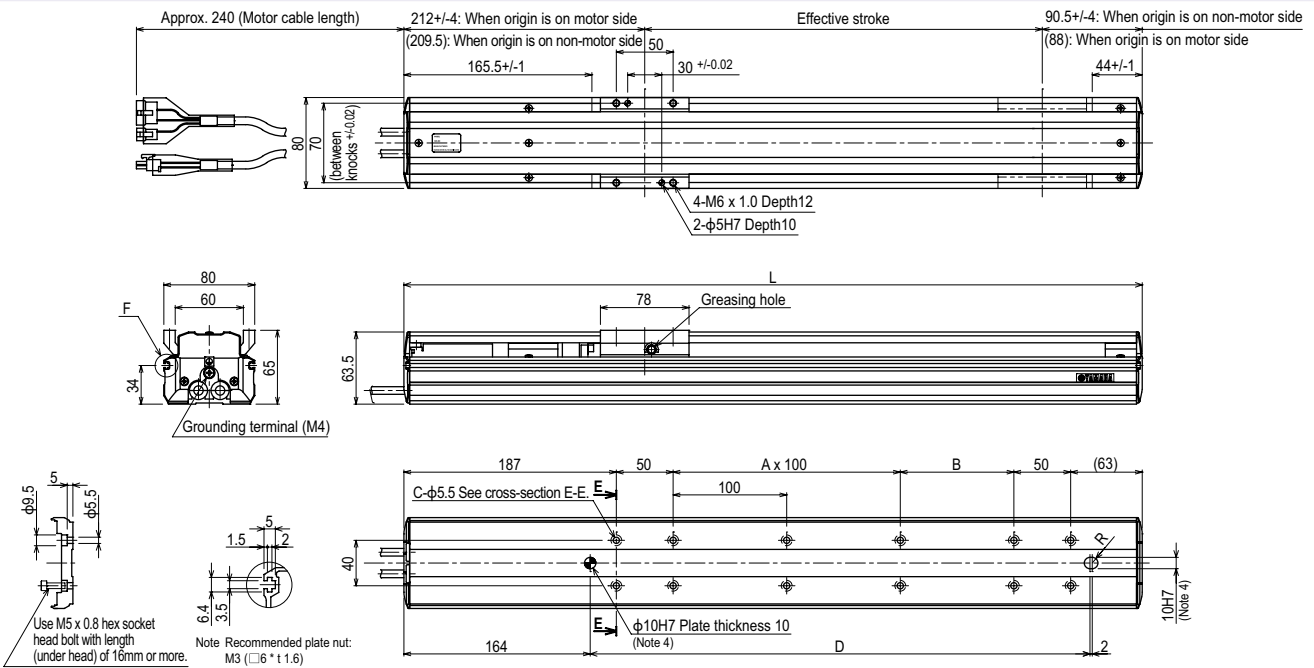

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	
L	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	
A	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	
B	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	
C	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	
D	240	290	340	390	440	490	540	590	640	690	740	790	840	890	940	990	1040	1090	1140	
Weight (kg)	3.9	4.2	4.5	4.8	5.1	5.4	5.7	6.1	6.4	6.7	7.0	7.3	7.6	7.9	8.2	8.5	8.8	9.2	9.5	
Maximum speed ^{Notes} (mm/sec)	Lead 30	1800																		
	Speed setting	-																		
													85%	75%	65%	60%	55%	50%	45%	40%

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. When installing the robot, do not use washers inside the robot body.

Note 3. Minimum bend radius of motor cable is R50.

Note 4. When using this ϕ 10 knockpin hole to position the robot body, the knockpin must not protrude more than 10mm inside the robot body.

Note 5. When the stroke is longer than 650mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.