

AGBS10/AGBS10H

Advanced model

Single-axis robots

Timing Belt Drive type

Ordering method

Model	Lead	Shape	Motor specification	Stroke	Cable length	Cable entry location	Robot positioner	Driver: Power capacity	Regenerative unit	I/O	Battery
AGBS10 AGBS10H	50: 50mm (Limited to AGBS10H) 30: 30mm	R: Motor rightward, horizontal position L: Motor leftward, horizontal position RU: Motor rightward, upper position LU: Motor leftward, upper position RD: Motor rightward, lower position LD: Motor leftward, lower position	S: Standard/With no brake BL: Battery-less absolute/ With no brake	150 to 3000 (50mm pitch)	R3: 3m R5: 5m R10: 10m	R: From rear of motor F: From front of motor	EP-01	A10: 200W or less	Note 2 No entry: None R: With EP-RU	EP: EtherNet/IP™ PT: PROFNET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. The robot cable is flexible and resists bending.

Note 2. [For AGBS10]

When the actuator is used horizontally, the stroke is 2200mm or more, the regenerative unit is needed.

[For AGBS10H]

When the actuator is used horizontally, ①lead 30 is selected, and the stroke is 500mm or more, ②lead 50 is selected, and the stroke is 850mm or more, the regenerative unit is needed.

Note 3. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Note. The return-to-origin direction can be changed by changing the parameter. (The standard is that the origin is located on the motor side. For details about how to change the return-to-origin direction, see the instruction manual for EP-01.)

AGBS10 (100W)

Specifications

AC servo motor output	100 W
Repeatability ^{Note 1}	±0.04 mm
Stroke	150 mm to 3000 mm (50 mm pitch)
Maximum Speed ^{Note 2}	2250 mm/sec
Belt	Equivalent to 30-mm Lead
Maximum payload	Horizontal 12 kg
Maximum dimensions of cross section of main unit	W 100 mm × H 81 mm
Overall length	L/R Specifications ST + 402.2 mm Other than the above ST + 332.7 mm
Degree of Cleanliness ^{Note 3}	Equivalent to ISO Class 3 (ISO 14644-1)
Intake air ^{Note 4}	60 Nℓ/min to 70 Nℓ/min
Position detector	Absolute Encoder Batteryless Absolute Encoder
Resolution	23 bits
Using ambient temperature and humidity ^{Note 5}	0 to 40 °C, 35 to 80 %RH (no condensation)

Note 1. Positioning repeatability in one direction.

Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note 5. When operating in low-temperature environments, a deviation error may occur when starting from a stopped state. In such cases, reduce the speed to 50% or less and run the unit for at least one full cycle before setting it to the desired operating speed.

AGBS10H (200W)

Specifications

AC servo motor output	200 W
Repeatability ^{Note 1}	±0.04 mm
Stroke	150 mm to 3000 mm (50 mm pitch)
Maximum Speed ^{Note 2}	3750 mm/sec 2250 mm/sec
Belt	Equivalent to 50-mm Lead Equivalent to 30-mm Lead
Maximum payload	Horizontal 18 kg 35 kg
Maximum dimensions of cross section of main unit	W 100 mm × H 81 mm
Overall length	L/R Specifications ST + 402.2 mm Other than the above ST + 332.7 mm
Degree of Cleanliness ^{Note 3}	Equivalent to ISO Class 3 (ISO 14644-1)
Intake air ^{Note 4}	60 Nℓ/min to 70 Nℓ/min
Position detector	Absolute Encoder Batteryless Absolute Encoder
Resolution	23 bits
Using ambient temperature and humidity ^{Note 5}	0 to 40 °C, 35 to 80 %RH (no condensation)

Note 1. Positioning repeatability in one direction.

Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed.


Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note 5. When operating in low-temperature environments, a deviation error may occur when starting from a stopped state. In such cases, reduce the speed to 50% or less and run the unit for at least one full cycle before setting it to the desired operating speed.

Motor installation

The line-up consisting of six models of different motor installation position as follows.

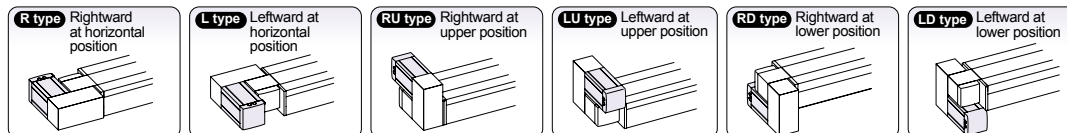

Allowable overhang^{Note}



AGBS10-30


	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
6kg	1284	621	522	6kg	570	408 859
9kg	1027	408	376	9kg	387	257 661
12kg	954	305	308	12kg	301	184 594

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 1000 mm stroke models.

Note. When using it suspended from the ceiling, the overhang will be the same as when used horizontally.

Static loading moment




(Unit: N·m)		
MY	MP	MR
186	186	164

Controller

Controller	Operation method
EP-01	I/O point trace/ Remote command

Allowable overhang^{Note}



AGBS10H-50

	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
6kg	943	621	429	6kg	479	408 627
12kg	768	302	279	12kg	276	182 477
18kg	746	208	220	18kg	198	115 434

AGBS10H-30

	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
15kg	630	238	223	15kg	211	137 376
25kg	626	152	168	25kg	135	76 336
35kg	648	115	139	35kg	94	50 313



Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 1000 mm stroke models.


Note. When using it suspended from the ceiling, the overhang will be the same as when used horizontally.

► The cycle time simulation and service life calculation can be performed easily from our member site.


AGBS10H

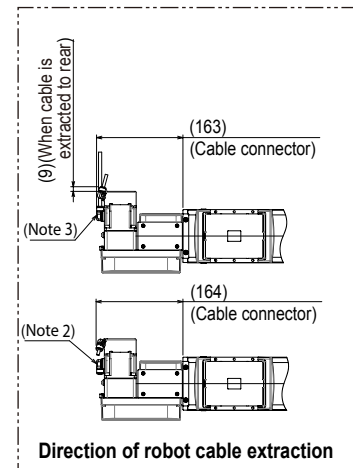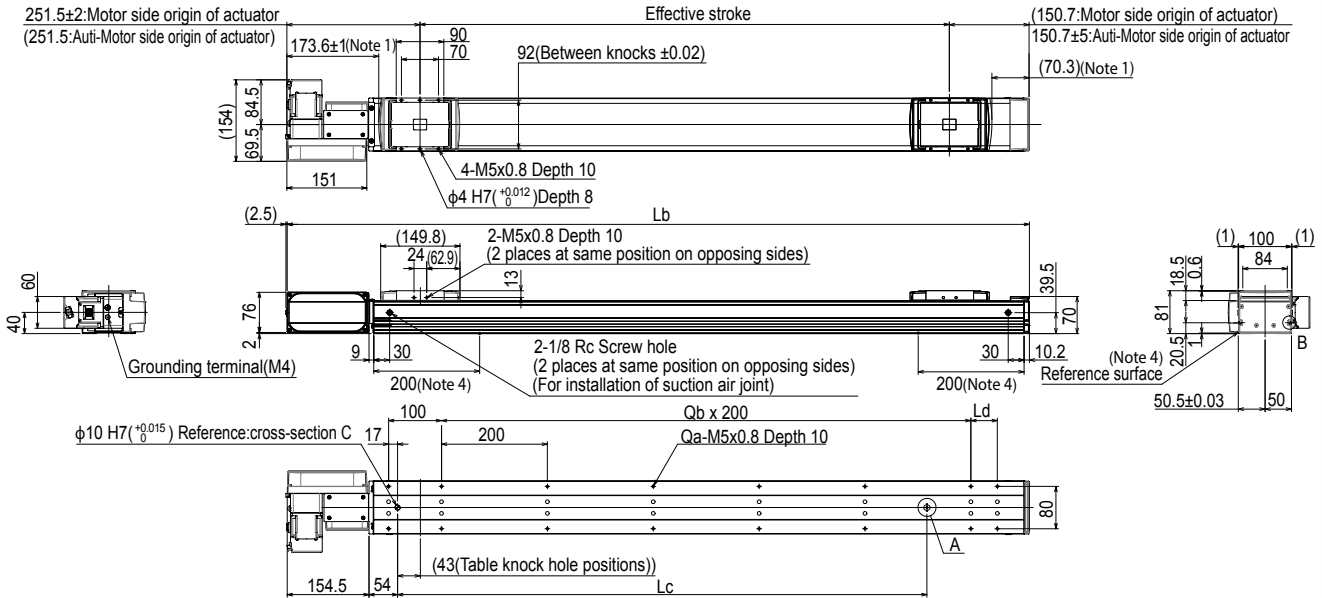


Direction of robot cable extraction

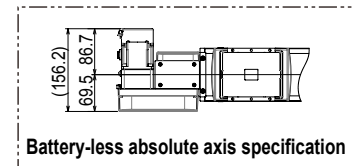


Battery-less absolute axis specification

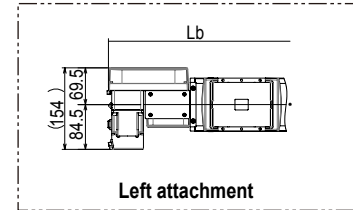


Left attachment

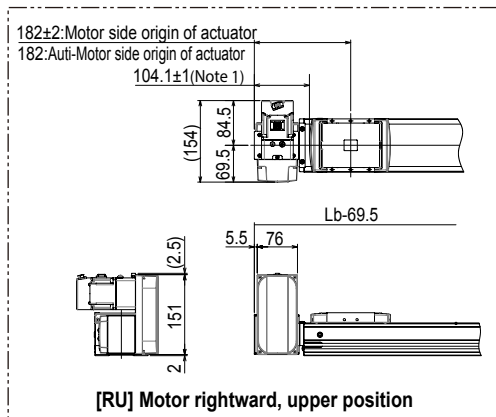


[RU] Motor rightward, upper position

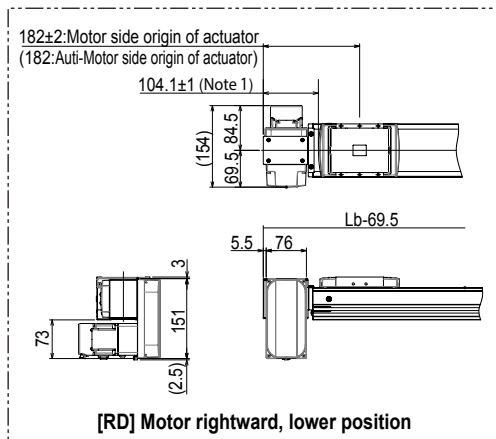

[RD] Motor rightward, lower position



Detailed drawing A



Detailed drawing B

Cross-section C

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
- Note 2. The robot cable is extracted from the front.
- Note 3. The robot cable is extracted from the rear.
- Note 4. When the effective stroke is 2050 mm or more, the reference plane is within 200 mm of the frame end face.
- Note. The return-to-origin direction can be changed by changing the parameter. (The standard is that the origin is located on the motor side. For details about how to change the return-to-origin direction, see the instruction manual for EP-01.)
- Note. In the installation tap hole, the length under head <<thickness of stand +10mm or less>> is recommended for the hex socket head bolts <M5x0.8> used to install the main unit.
- Note. The minimum bending radius for robot cables should be R30 or more for fixed cables / R50 or more for movable cables.

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550			
Lb	552.2	602.2	652.2	702.2	752.2	802.2	852.2	902.2	952.2	1002.2	1052.2	1102.2	1152.2	1202.2	1252.2	1302.2	1352.2	1402.2	1452.2	1502.2	1552.2	1602.2	1652.2	1702.2	1752.2	1802.2	1852.2	1902.2	1952.2			
Lc	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550			
Ld	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200			
Qa	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20	20			
Qb	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7			
Weight (kg)	6.7	7.1	7.5	7.9	8.3	8.7	9.1	9.5	9.8	10.2	10.6	11	11.4	11.8	12.2	12.6	13	13.4	13.8	14.2	14.5	14.9	15.3	15.7	16.1	16.5	16.9	17.3	17.7			
Stroke restriction	No stroke restrictions																															
	To 2000st																															
	To 1500st																															
Effective stroke	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000			
Lb	2002.2	2052.2	2102.2	2152.2	2202.2	2252.2	2302.2	2352.2	2402.2	2452.2	2502.2	2552.2	2602.2	2652.2	2702.2	2752.2	2802.2	2852.2	2902.2	2952.2	3002.2	3052.2	3102.2	3152.2	3202.2	3252.2	3302.2	3352.2	3402.2			
Lc	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000			
Ld	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50			
Qa	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36			
Qb	8	8	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15			
Weight (kg)	18.1	18.5	18.9	19.2	19.6	20	20.4	20.8	21.2	21.6	22	22.4	22.8	23.2	23.6	23.9	24.3	24.7	25.1	25.5	25.9	26.3	26.7	27.1	27.5	27.9	28.3	28.7	29			
Stroke restriction	No stroke restrictions																															
	To 2000st																															
	To 1500st																															

AGBS14/AGBS14H

Advanced model

Single-axis robots

Timing Belt Drive type

Ordering method

Model	Lead	Shape	Motor specification	OP.1	Stroke	Cable length	Cable entry location	Robot positioner	Driver Power capacity	Regenerative unit	I/O	Battery
AGBS14	50: 50mm	R: Motor rightward, horizontal position L: Motor leftward, horizontal position RU: Motor rightward, upper position LU: Motor leftward, upper position RD: Motor rightward, lower position LD: Motor leftward, lower position	S: Standard/With no brake BL: Battery-less absolute/With no brake	No entry; Standard M: Centerized Lubrication	150 to 4000 (50mm pitch)	R3: 3m R5: 5m R10: 10m	R: From rear of motor F: From front of motor	EP-01	A10: 200W or less A30: 400W/750W	No entry: None R: With EP-RU C: With RU-1	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. The robot cable is flexible and resists bending.

Note 2. [For AGBS14]

When the actuator is used horizontally, ①lead 30 is selected, and the stroke is 2300mm or more, ②lead 50 is selected, and the stroke is 650mm or more, the regenerative unit is needed.

[For AGBS14H]

When the actuator is used horizontally, ①lead 30 is selected, and the stroke is 800mm or more, ②lead 50 is selected, and the stroke is 500mm or more, the regenerative unit is needed. (In this case, please choose the regenerative device "RU1".) ③lead 50 is selected, and the stroke is 1550mm or more.

Note 3. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Note 4. The return-to-origin direction can be changed by changing the parameter. (The standard is that the origin is located on the motor side. For details about how to change the return-to-origin direction, see the instruction manual for EP-01.)

AGBS14 (200W)

Specifications

AC servo motor output	200 W	
Repeatability ^{Note 1}	±0.04 mm	
Stroke	150 mm to 4000 mm (50 mm pitch)	
Maximum Speed ^{Note 2}	3750 mm/sec	2250 mm/sec
Belt	Equivalent to 50-mm Lead	Equivalent to 30-mm Lead
Maximum payload	Horizontal 8 kg	30 kg
Maximum dimensions of cross section of main unit	W 140 mm × H 83 mm	
Overall length	L/R Specifications ST + 474.5 mm	Other than the above ST + 405 mm
Degree of Cleanliness ^{Note 3}	Equivalent to ISO Class 3 (ISO 14644-1)	
Intake air ^{Note 4}	90 Nℓ/min	
Position detector	Absolute Encoder Batteryless Absolute Encoder	
Resolution	23 bits	
Using ambient temperature and humidity ^{Note 5}	0 to 40 °C, 35 to 80 %RH (no condensation)	

Note 1. Positioning repeatability in one direction.

Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note 5. When operating in low-temperature environments, a deviation error may occur when starting from a stopped state. In such cases, reduce the speed to 50% or less and run the unit for at least one full cycle before setting it to the desired operating speed.

AGBS14H (400W)

Specifications

AC servo motor output	400 W	
Repeatability ^{Note 1}	±0.04 mm	
Stroke	150 mm to 4000 mm (50 mm pitch)	
Maximum Speed ^{Note 2}	3750 mm/sec	2250 mm/sec
Belt	Equivalent to 50-mm Lead	Equivalent to 30-mm Lead
Maximum payload	Horizontal 30 kg	60 kg
Maximum dimensions of cross section of main unit	W 140 mm × H 83 mm	
Overall length	L/R Specifications ST + 474.5 mm	Other than the above ST + 405 mm
Degree of Cleanliness ^{Note 3}	Equivalent to ISO Class 3 (ISO 14644-1)	
Intake air ^{Note 4}	90 Nℓ/min	
Position detector	Absolute Encoder Batteryless Absolute Encoder	
Resolution	23 bits	
Using ambient temperature and humidity ^{Note 5}	0 to 40 °C, 35 to 80 %RH (no condensation)	

Note 1. Positioning repeatability in one direction.

Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note 5. When operating in low-temperature environments, a deviation error may occur when starting from a stopped state. In such cases, reduce the speed to 50% or less and run the unit for at least one full cycle before setting it to the desired operating speed.


Motor installation The line-up consisting of six models of different motor installation position as follows.

R type Rightward at horizontal position	L type Leftward at horizontal position	RU type Rightward at upper position	LU type Leftward at upper position	RD type Rightward at lower position	LD type Leftward at lower position
--	---	--	---	--	---



▶ The cycle time simulation and service life calculation can be performed easily from our member site.

Allowable overhang^{Note}



AGBS14-50

	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
4kg	4595	3295	2628	2664	3259	4554
6kg	4027	2188	2007	2051	2151	3973
8kg	3739	1634	1647	1696	1598	3672

AGBS14-30


	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
10kg	2334	1302	1236	1237	1265	2289
20kg	1641	637	670	675	601	1565
30kg	1601	442	519	517	405	1495

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 1000 mm stroke models.

Note. When using it suspended from the ceiling, the overhang will be the same as when used horizontally.

Allowable overhang^{Note}



AGBS14H-50

	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
10kg	943	621	429	479	408	627
20kg	768	302	279	276	182	477
30kg	746	208	220	198	115	434

AGBS14H-30







	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
20kg	1519	637	652	653	601	1449
40kg	1501	344	424	414	308	1374
60kg	1596	250	332	309	213	1410

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 1000 mm stroke models.

Note. When using it suspended from the ceiling, the overhang will be the same as when used horizontally.

AGBS14

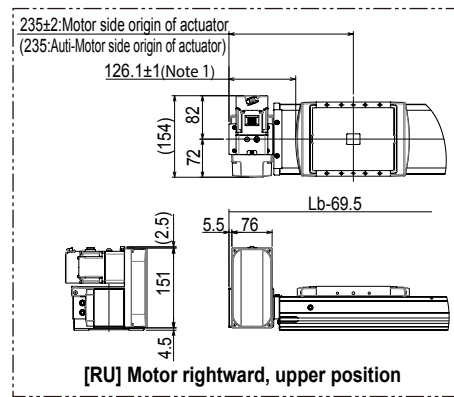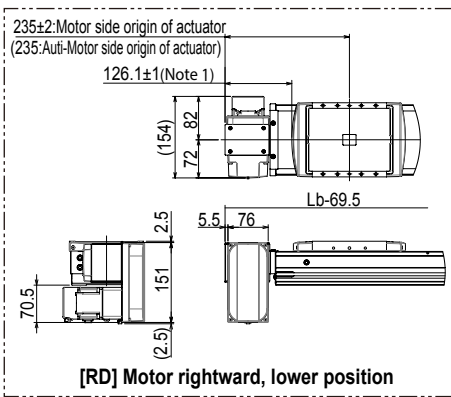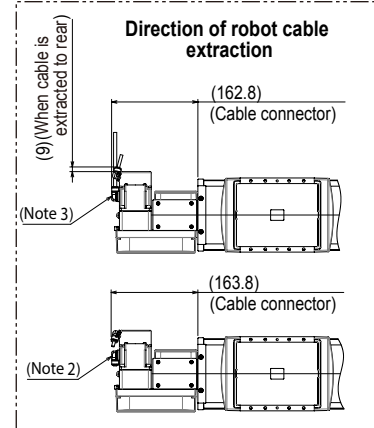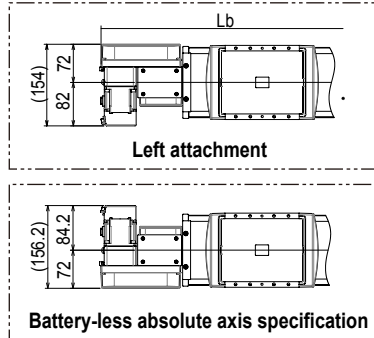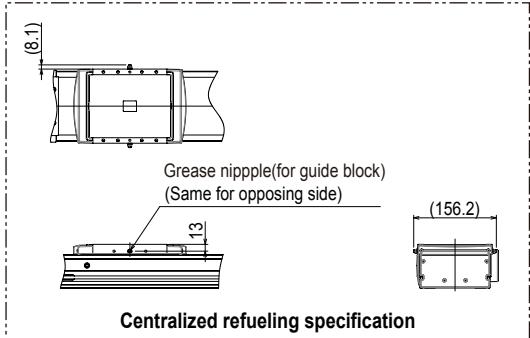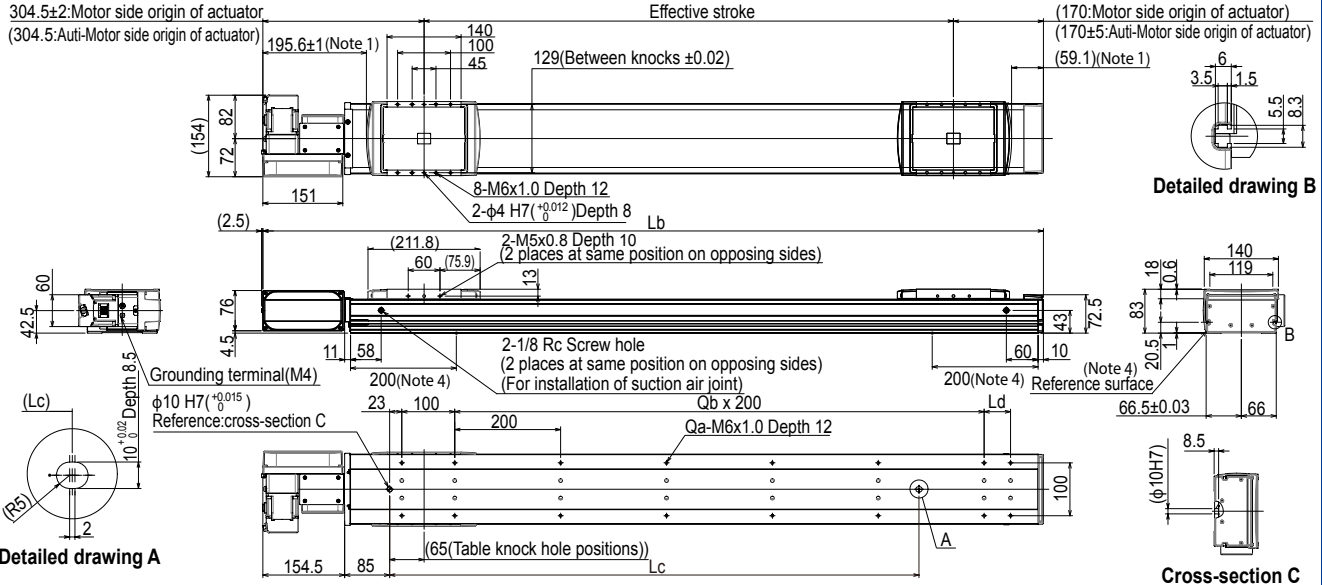

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. The robot cable is extracted from the front.
 Note 3. The robot cable is extracted from the rear.
 Note 4. When the effective stroke is 2050 mm or more, the reference plane is within 200 mm of the frame end face.
 Note. The return-to-origin direction can be changed by changing the parameter. (The standard is that the origin is located on the motor side. For details about how to change the return-to-origin direction, see the instruction manual for EP-01.)
 Note. In the installation tap hole, the length under head <<thickness of stand +10mm or less>> is recommended for the hex socket head bolts <M6x1.0> used to install the main unit.
 Note. The minimum bending radius for robot cables should be R30 or more for fixed cables / R50 or more for movable cables.

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	
	Lb	624.5	674.5	724.5	774.5	824.5	874.5	924.5	974.5	1024.5	1074.5	1124.5	1174.5	1224.5	1274.5	1324.5	1374.5	1424.5	1474.5	1524.5	1574.5	1624.5	1674.5	1724.5	1774.5	1824.5	1874.5	1924.5	1974.5	2024.5	2074.5	2124.5	2174.5	2224.5	2274.5	2324.5	2374.5	2424.5	2474.5	2524.5
Lc	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	
Ld	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	
Qa	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20	22	22	22	22	24	24	24	24	26	26		
Qb	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8	8	9	9	9	9	10	10	
Weight (kg)	9.4	9.9	10.3	10.8	11.2	11.7	12.2	12.6	13.1	13.5	14.0	14.5	14.9	15.4	15.8	16.3	16.8	17.2	17.7	18.1	18.6	19.0	19.5	20.0	20.4	20.9	21.3	21.8	22.3	22.7	23.2	23.6	24.1	24.6	25.0	25.5	25.9	26.4	26.9	
Stroke restriction	No stroke restrictions																																							
	Horizontal-Vertical																				To 1500st																			
	Wall hanging																				To 2000st																			
Ceiling-mounted																																								

Effective stroke	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	3100	3150	3200	3250	3300	3350	3400	3450	3500	3550	3600	3650	3700	3750	3800	3850	3900	3950	4000	
	Lb	2574.5	2624.5	2674.5	2724.5	2774.5	2824.5	2874.5	2924.5	2974.5	3024.5	3074.5	3124.5	3174.5	3224.5	3274.5	3324.5	3374.5	3424.5	3474.5	3524.5	3574.5	3624.5	3674.5	3724.5	3774.5	3824.5	3874.5	3924.5	3974.5	4024.5	4074.5	4124.5	4174.5	4224.5	4274.5	4324.5	4374.5	4424.5	4474.5
Lc	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050	3100	3150	3200	3250	3300	3350	3400	3450	3500	3550	3600	3650	3700	3750	3800	3850	3900	3950	4000	
Ld	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	
Qa	26	26	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	36	36	36	36	38	38	38	38	40	40	40	42	42	42	42	44	44	44	44	46	46		
Qb	10	10	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15	15	15	16	16	16	16	17	17	17	17	18	18	18	18	19	19	19	19	20	
Weight (kg)	27.3	27.8	28.2	28.7	29.1	29.6	30.1	30.5	31.0	31.4	31.9	32.4	32.8	33.3	33.7	34.2	34.7	35.1	35.6	36	36.5	36.9	37.4	37.9	38.3	38.8	39.2	39.7	40.2	40.6	41.1	41.5	42	42.5	42.9	43.4	43.8	44.3	44.8	
Stroke restriction	No stroke restrictions																																							
	Horizontal-Vertical																				To 1500st																			
	Wall hanging																				To 2000st																			
Ceiling-mounted																																								

