


SS04 Slider type

- CE compliance
- Origin on the non-motor side is selectable

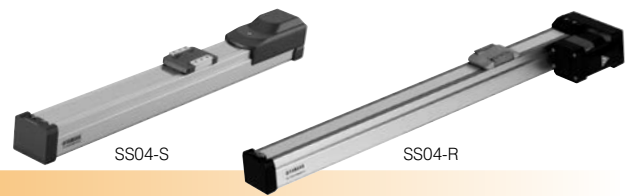

Ordering method

SS04

Model	Lead	Model	Brake	Origin position	Grease option	Stroke	Cable length ^{Note 2}
	12: 12mm 06: 6mm 02: 2mm	S: Straight model R: Space-saving model (motor installed on right) L: Space-saving model (motor installed on left)	N: With no brake B: With brake	N: Standard ^{Note 1} Z: Non-motor side	N: Standard grease C: Clean room grease	50 to 400 (50mm pitch)	1K: 1m 3K: 3m 5K: 5m 10K: 10m

S2

Robot positioner	I/O
S2: TS-S2 ^{Note 3}	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}

SH

Robot positioner	I/O	Battery
SH: TS-SH	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}	B: With battery (Absolute) N: None (Incremental)

SD

Robot driver	I/O cable
SD: TS-SD	1: 1m


- Note 1. If changing from the origin position at the time of purchase, the machine reference amount must be reset. For details, refer to the manual.
 Note 2. The robot cable is flexible and resists bending.
 Note 3. See P.498 for DIN rail mounting bracket.
 Note 4. Select this selection when using the gateway function. For details, see P.60.

Basic specifications

Motor	42 □ Step motor	
Resolution (Pulse/rotation)	20480	
Repeatability ^{Note 1} (mm)	±0.02	
Deceleration mechanism	Ball screw φ8 (Class C10)	
Maximum motor torque (N·m)	0.27	
Ball screw lead (mm)	12	6
Maximum speed (mm/sec)	600	300
Maximum payload (kg)	Horizontal: 2	Vertical: 4
Max. pressing force (N)	45	90
Stroke (mm)	50 to 400 (50mm pitch)	
Overall length (mm)	Horizontal: Stroke+216	Vertical: Stroke+261
Maximum outside dimension of body cross-section (mm)	W49 × H59	
Cable length (m)	Standard: 1 / Option: 3, 5, 10	


Note 1. Positioning repeatability in one direction.

Allowable overhang ^{Note}




	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)		
	A	B	C	A	B	C	A	C	
Lead 12	1kg: 807	218	292	1kg: 274	204	776	0.5kg: 407	408	
	2kg: 667	107	152	2kg: 133	93	611	1kg: 204	204	
Lead 6	2kg: 687	116	169	2kg: 149	102	656	1kg: 223	223	
	3kg: 556	76	112	3kg: 92	62	516	2kg: 107	107	
Lead 2	4kg: 567	56	84	4kg: 63	43	507	2kg: 118	118	
	4kg: 869	61	92	4kg: 72	48	829	4kg: 53	53	
Lead 2	6kg: 863	40	60	6kg: 39	29	789			

Static loading moment




(Unit: N·m)		
MY	MP	MR
16	19	17

Motor installation (Space-saving model)

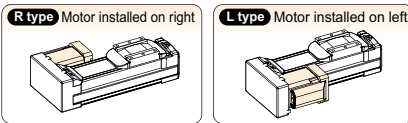


SS04 Straight model S

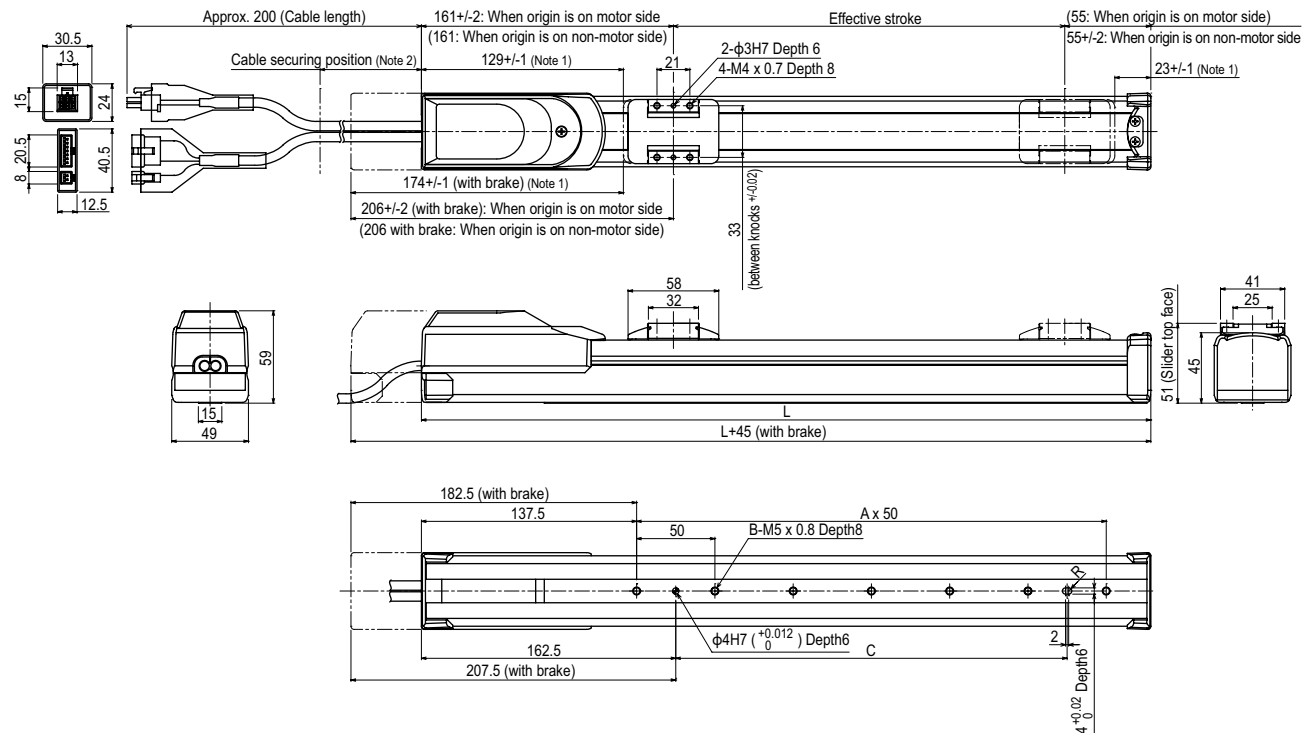

Effective stroke	50	100	150	200	250	300	350	400
L	266	316	366	416	466	516	566	616
A	2	3	4	5	6	7	8	9
B	3	4	5	6	7	8	9	10
C	50	100	150	200	250	300	350	400
Weight (kg) ^{Note 4}	1.5	1.6	1.7	1.8	2.0	2.1	2.2	2.3

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.
 Note 3. The cable's minimum bend radius is R30.
 Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.

SS04 Space-saving model **R** **L**

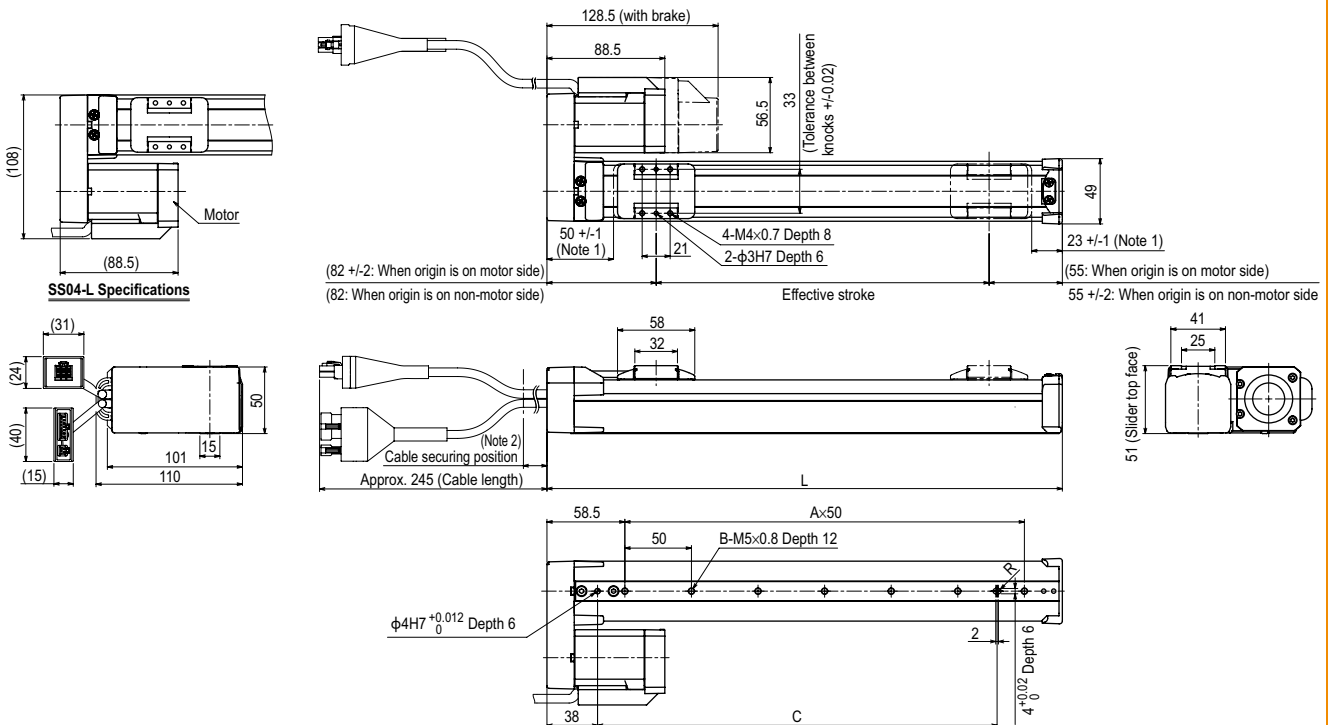

Effective stroke	50	100	150	200	250	300	350	400
L	187	237	287	337	387	437	487	537
A	2	3	4	5	6	7	8	9
B	3	4	5	6	7	8	9	10
C	100	150	200	250	300	350	400	450
Weight (kg) ^{Note 4}	1.2	1.4	1.5	1.6	1.7	1.8	1.9	2.1

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Secure the cable with a tie-band 80mm or less from unit's end face to prevent the cable from being subjected to excessive loads.
 Note 3. The cable's minimum bend radius is R30.
 Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.
 Note 5. The belt cover's left and right sides are asymmetrical. Therefore, if the motor mounting orientation is changed, the cover cannot be attached.

SS05

Slider type



- High lead: Lead 20
- CE compliance
- Origin on the non-motor side is selectable

Ordering method

SS05

Model	Lead	Model	Brake	Origin position	Grease option	Stroke	Cable length
	20: 20mm 12: 12mm 06: 6mm	S: Straight model R: Space-saving model (motor installed on right) L: Space-saving model (motor installed on left)	Note 1 N: With no brake B: With brake	Note 2 N: Standard Z: Non-motor side	N: Standard grease C: Clean room grease	50 to 800 (50mm pitch)	Note 3 1K: 1m 3K: 3m 5K: 5m 10K: 10m

S2	I/O
Robot positioner S2: TS-S2	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board
SH	Battery
Robot positioner SH: TS-SH	B: With battery (Absolute) N: None (Incremental)
SD	I/O cable
Robot driver SD: TS-SD	1 1: 1m


Note 1. Brake-equipped models can be selected only when the lead is 12mm or 6mm.
 Note 2. If changing from the origin position at the time of purchase, the machine reference amount must be reset. For details, refer to the manual.
 Note 3. The robot cable is flexible and resists bending.
 Note 4. See P.498 for DIN rail mounting bracket.
 Note 5. Select this selection when using the gateway function. For details, see P.60.

Basic specifications

Motor	42 Step motor
Resolution (Pulse/rotation)	20480
Repeatability (mm)	+/-0.02
Deceleration mechanism	Ball screw $\phi 12$ (Class C10)
Maximum motor torque (N·m)	0.27
Ball screw lead (mm)	20 12 6
Maximum speed (mm/sec)	1000 600 300
Maximum payload (kg)	Horizontal 4 6 10 Vertical - 1 2
Max. pressing force (N)	27 45 90
Stroke (mm)	50 to 800 (50mm pitch)
Overall length (mm)	Horizontal Stroke+230 Vertical Stroke+270
Maximum outside dimension of body cross-section (mm)	W55 x H56
Cable length (m)	Standard: 1 / Option: 3, 5, 10

Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.

Motor installation (Space-saving model)

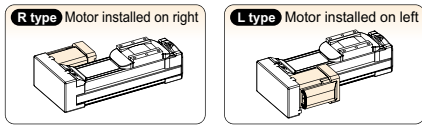

Allowable overhang

Horizontal installation (Unit: mm)	Wall installation (Unit: mm)			Vertical installation (Unit: mm)		
	A	B	C	A	B	C
Lead 20	2kg	413	139	2kg	192	123
	4kg	334	67	4kg	92	51
	4kg	347	72	4kg	109	57
Lead 12	4kg	335	47	6kg	63	31
	4kg	503	78	4kg	134	63
	8kg	332	37	6kg	76	35
Lead 6	10kg	344	29	8kg	47	22
				8kg	47	22

Note. Distance from center of slider upper surface to carrier center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 600mm stroke models).


Static loading moment

(Unit: N·m)		
MY	MP	MR
0.5kg	578	579
1kg	286	286
1kg	312	312
2kg	148	148

Controller

Controller	Operation method
TS-S2	I/O point trace / Remote command
TS-SH	Remote command
TS-SD	Pulse train control


SS05 Straight model

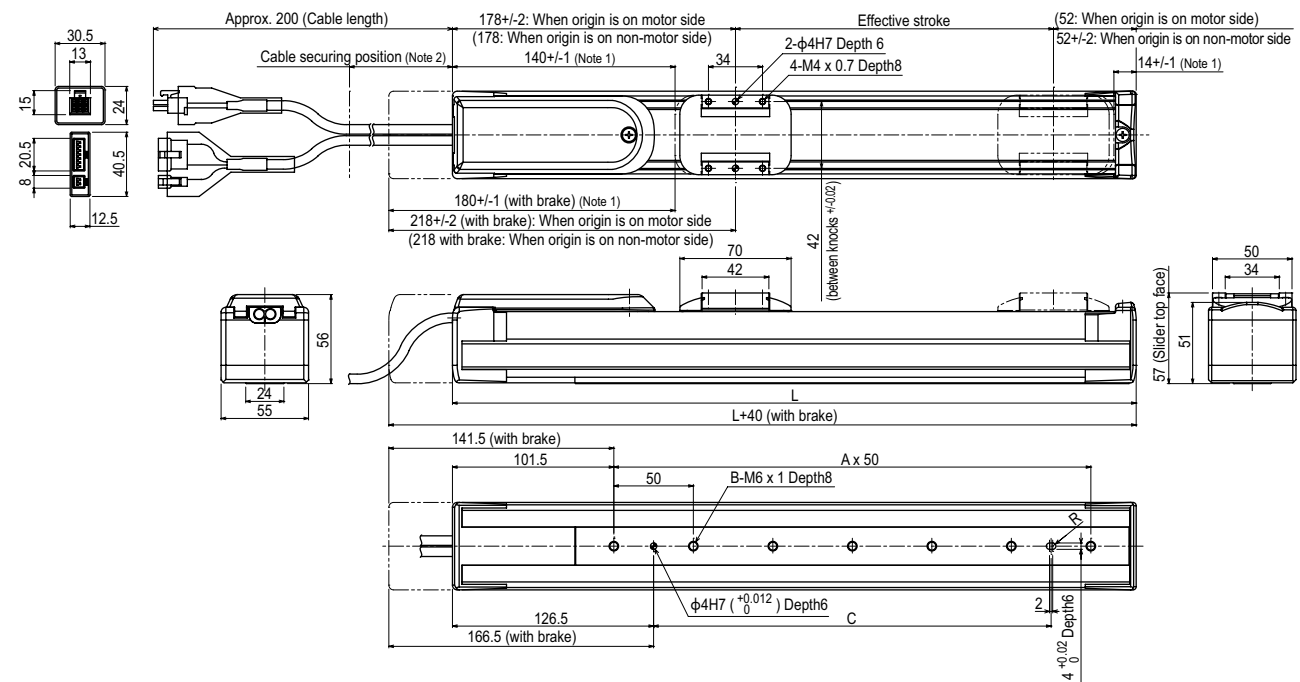

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	280	330	380	430	480	530	580	630	680	730	780	830	880	930	980	1030
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
B	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500
Weight (kg)	2.1	2.3	2.5	2.7	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.6	4.8	5.0
Maximum speed for each stroke (mm/sec)	Lead 20	1000										933	833	733	633	
	Lead 12	600										560	500	440	380	
	Lead 6	300										280	250	220	190	
	Speed setting	-										93%	83%	73%	63%	

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.
 Note 3. The cable's minimum bend radius is R30.
 Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.
 Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table at the left.

SS05 Space-saving model **R** **L**

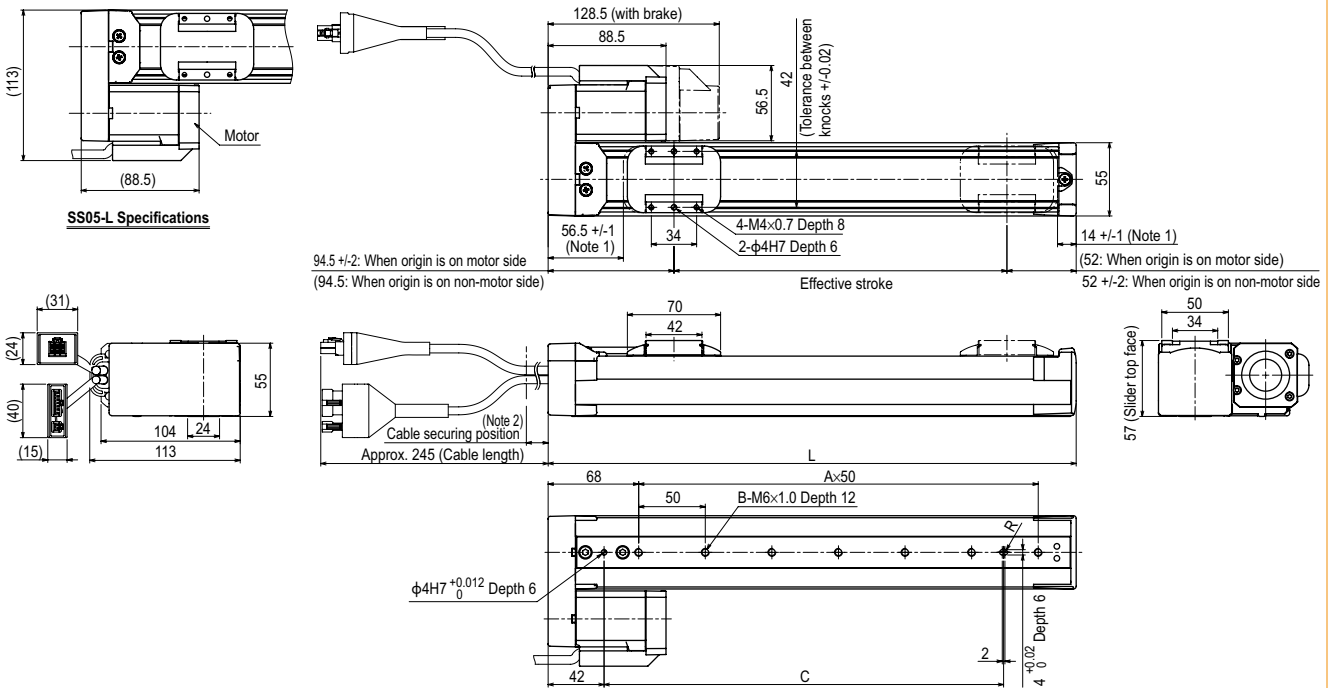

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	196.5	246.5	296.5	346.5	396.5	446.5	496.5	546.5	596.5	646.5	696.5	746.5	796.5	846.5	896.5	946.5
A	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
B	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500
Weight (kg) ^{Note 4}	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.1	4.3	4.5
Maximum speed for each stroke ^{Note 5} (mm/sec)	Lead20											933	833	733	633	
	Lead12											560	500	440	380	
	Lead6											280	250	220	190	
Speed setting											93%	83%	73%	63%		

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
- Note 2. Secure the cable with a tie-band 80mm or less from unit's end face to prevent the cable from being subjected to excessive loads.
- Note 3. The cable's minimum bend radius is R30.
- Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.
- Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table at the left.
- Note 6. The belt cover's left and right sides are asymmetrical. Therefore, if the motor mounting orientation is changed, the cover cannot be attached.

SS05H

Slider type



- High lead: Lead 20
- CE compliance
- Origin on the non-motor side is selectable

Ordering method

SS05H

Model	Lead	Model	Brake ^{Note 1}	Origin position	Grease option	Stroke	Cable length ^{Note 3}
	20: 20mm 12: 12mm 06: 6mm	S: Straight model R: Space-saving model (motor installed on right) L: Space-saving model (motor installed on left)	N: With no brake B: With brake	N: Standard ^{Note 2} Z: Non-motor side	N: Standard grease C: Clean room grease	50 to 800 (50mm pitch)	1K: 1m 3K: 3m 5K: 5m 10K: 10m

S2	I/O
Robot positioner S2: TS-S2 ^{Note 4}	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 5}
SH	Battery
Robot positioner SH: TS-SH	B: With battery (Absolute) N: None (Incremental)
SD	1
Robot driver SD: TS-SD	I/O cable 1: 1m


Note 1. Brake-equipped models can be selected only when the lead is 12mm or 6mm.
 Note 2. If changing from the origin position at the time of purchase, the machine reference amount must be reset. For details, refer to the manual.
 Note 3. The robot cable is flexible and resists bending.
 Note 4. See P.498 for DIN rail mounting bracket.
 Note 5. Select this selection when using the gateway function. For details, see P.60.

Basic specifications


Motor	42 □ Step motor
Resolution (Pulse/rotation)	20480
Repeatability ^{Note 1} (mm)	+/-0.02
Deceleration mechanism	Ball screw φ12 (Class C10)
Maximum motor torque (N·m)	0.47
Ball screw lead (mm)	20 12 6
Maximum speed ^{Note 2} (mm/sec)	Horizontal 1000 600 300 Vertical - 500 250
Maximum payload (kg)	Horizontal 6 8 12 Vertical - 2 4
Max. pressing force (N)	36 60 120
Stroke (mm)	50 to 800 (50pitch)
Overall length (mm)	Horizontal Stroke+286 Vertical Stroke+306
Maximum outside dimension of body cross-section (mm)	W55 × H56
Cable length (m)	Standard: 1 / Option: 3, 5, 10

Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.

Motor installation (Space-saving model)

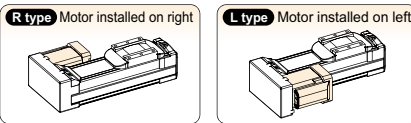

Allowable overhang ^{Note}



Lead	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)	
	A	B	C	A	B	C	A	C
Lead 20	2kg 599	4kg 366	6kg 352	2kg 262	4kg 118	6kg 71	Lead 12 1kg 458	Lead 6 2kg 224
Lead 12	4kg 500	6kg 399	8kg 403	4kg 146	6kg 85	8kg 55	2kg 244	4kg 113
Lead 6	6kg 573	8kg 480	10kg 442	6kg 101	8kg 64	10kg 43	4kg 244	4kg 113
	8kg 465	10kg 39	12kg 64	8kg 55	10kg 28	12kg 17		

Static loading moment


(Unit: N·m)		
MY	MP	MR
32	38	34

Controller

Controller	Operation method
TS-S2	I/O point trace / Remote command
TS-SH	Remote command
TS-SD	Pulse train control

Note. Distance from center of slider upper surface to carrier center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 600mm stroke models).


SS05H Straight model **S**

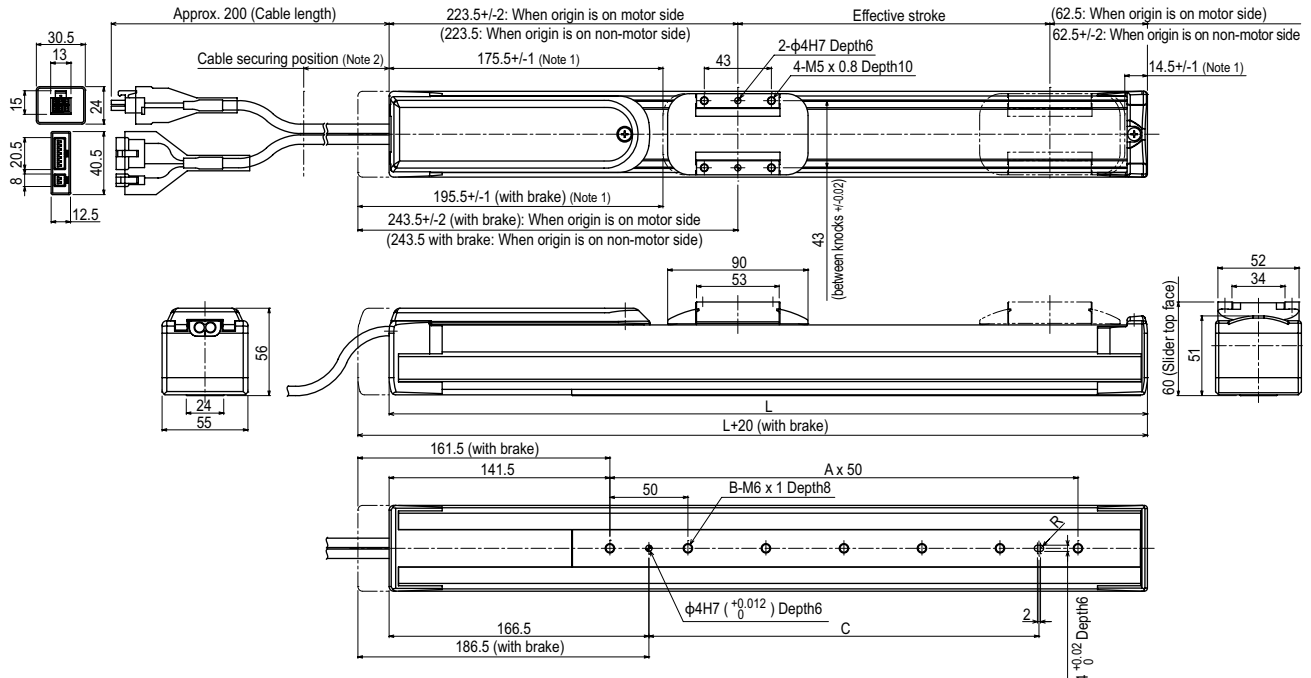

Effective stroke	Stroke (mm)																
	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	
L	336	386	436	486	536	586	636	686	736	786	836	886	936	986	1036	1086	
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	
B	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500	
Weight (kg) ^{Note 4}	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.5	4.7	4.9	5.1	5.3	
Maximum speed for each stroke ^{Note 5} (mm/sec)	Lead20	1000															
	Lead12 (Horizontal)	600															
	Lead12 (Vertical)	500															
	Lead6 (Horizontal)	300															
	Lead6 (Vertical)	250															
Speed setting	-																
													93%	83%	73%	63%	

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.
 Note 3. The cable's minimum bend radius is R30.
 Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.
 Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table at the left.

SS05H Space-saving model R L

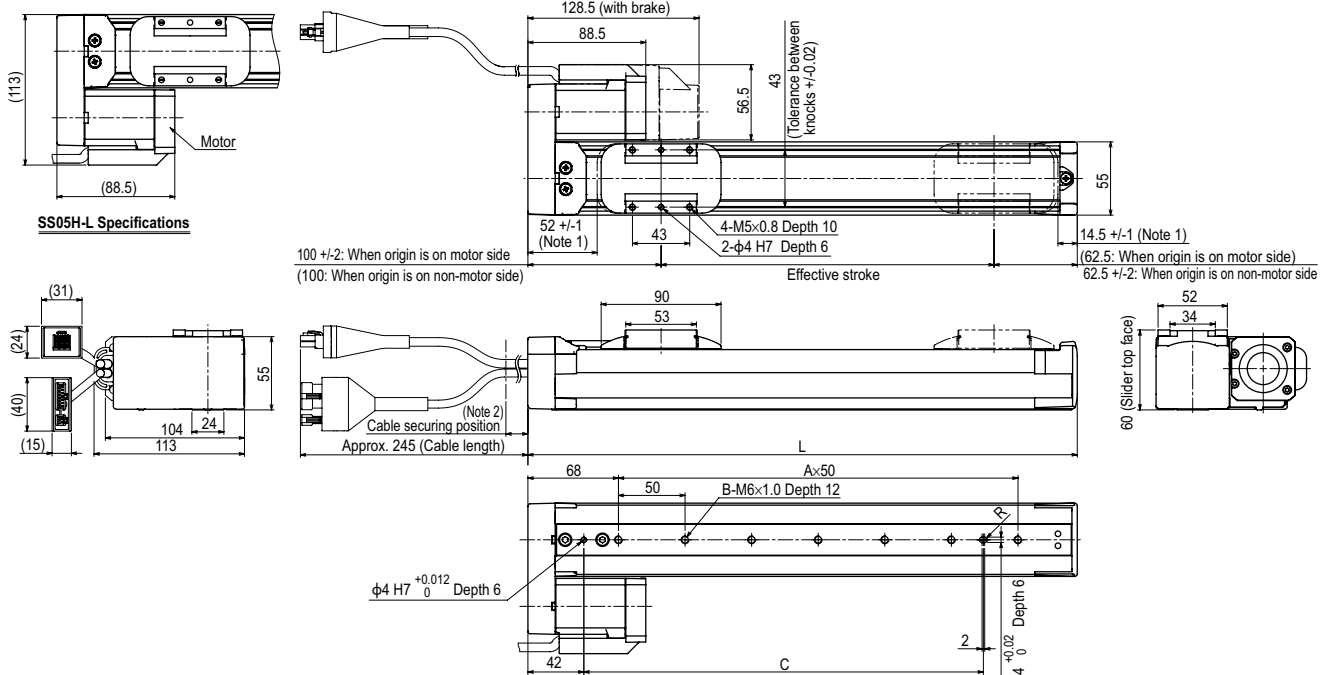

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	212.5	262.5	312.5	362.5	412.5	462.5	512.5	562.5	612.5	662.5	712.5	762.5	812.5	862.5	912.5	962.5
A	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
B	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	100	150	200	250	300	350	400	450	500	500	500	500	500	500	500	500
Weight (kg) ^{Note 4}	1.7	1.9	2.1	2.3	2.5	2.7	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.6
Maximum speed for each stroke ^{Note 5} (mm/sec)	Lead20	1000														
	Lead12 (Horizontal)	600														
	Lead12 (Vertical)	500														
	Lead6 (Horizontal)	300														
	Lead6 (Vertical)	250														
Speed setting												93%	83%	73%	63%	

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
- Note 2. Secure the cable with a tie-band 80mm or less from unit's end face to prevent the cable from being subjected to excessive loads.
- Note 3. The cable's minimum bend radius is R30.
- Note 4. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.
- Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table at the left.
- Note 6. The belt cover's left and right sides are asymmetrical. Therefore, if the motor mounting orientation is changed, the cover cannot be attached.