

YK-TW Orbit type


YK-TW POINT 1

Layout design freedom

User: We want a smaller equipment footprint.

YK-TW can move anywhere through the full ϕ 1000 mm ^{Note 2} work envelope.

Featuring a ceiling-mount configuration with a wide arm rotation angle, the YK-TW can access any point within the full ϕ 1000 mm downward range. This eliminates all motion-related restrictions with regard to pallet and conveyor placement operations, while dramatically reducing the equipment footprint.

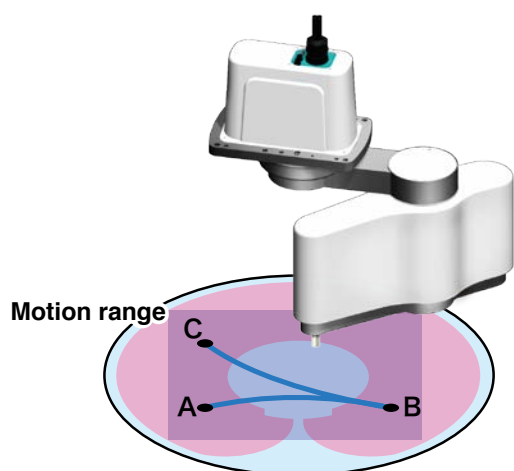

Orbit type SCARA robot Standard type SCARA robot


YK-TW POINT 2

Higher productivity

User: We need to reduce cycle time.

Standard cycle time of 0.29 secs. ^{Note 2}

Y-axis (arm 2) passes beneath the X-axis (arm 1) and it has a horizontal articulated structure, allowing it to move along the optimal path between points. Moreover, the optimized weight balance of the internal components reduces the cycle time by 36 % as compared to previous models.

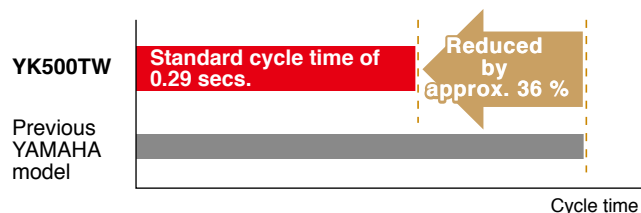

The standard cycle time for moving a 1-kg load horizontally 300 mm and up/down 25 mm is shortened by approximately 36 % compared to existing YAMAHA models.


YK-TW POINT 3

High quality

User: We want a high precision assembly system.

YK-TW offers a repeated positioning accuracy of ± 0.01 mm ^{Note 1} (XY axes).

Higher repeated positioning accuracy than that offered by a parallel-link robot. This was accomplished by optimizing the robot's weight balance through an extensive re-design of its internal construction. The lightweight yet highly rigid arm has also been fitted with optimally tuned motors to enable high accuracy positioning.

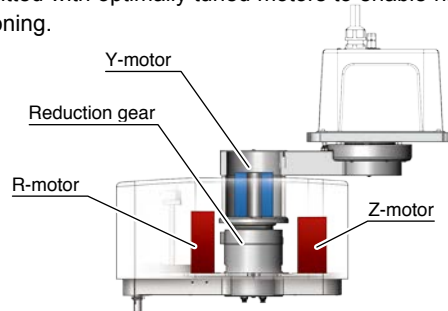

Hollow construction

Y-motor and reduction gear feature a hollow construction which allows them to be housed inside the harness arm.

360 ° Rotation.

Optimized rotation center of gravity moment

Weight balance was optimized by placing the R-motor and Z-motor at the left and right sides respectively.

Reduced inertia enables high-speed motion.

YK-TW POINT 4

Suitable for a wide range of applications

User: We need to move heavy workpieces at high speeds.

YK-TW handles payloads up to 5 kg.

Handles loads up to 5 kg. Also accommodates arm-end tools which tend to be heavy, making it highly adaptable to various applications.


YK-TW POINT 5

Smaller equipment footprint

User: We want to reduce the height of our equipment.

YK-TW offers both a lower height and a smaller footprint.

YK-TW height is only 392 mm. This compact size enables more freedom in the equipment layout design.

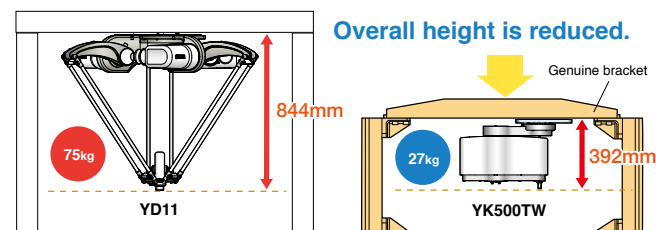

Note 1. Applies to the YK350TW Note 2. Applies to the YK500TW

YK-TW POINT 6

Easy installation

User: Parallel-link robots require large frames which complicates installation...

YK-TW has a total height of only 392 mm, and weighs only 27 kg.

Lower inertia = Lighter frame




YK-TW POINT 8

Ideal for narrow space applications

User: We need to install in limited space, such as between equipment.


Minimum installation width 492mm ^{Note 1}

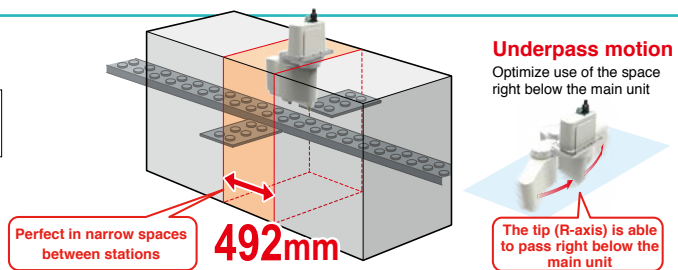

YK-XG Completely beltless type

Integral structure designed for optimal operation

Note. The following shows an example of YK500XG.

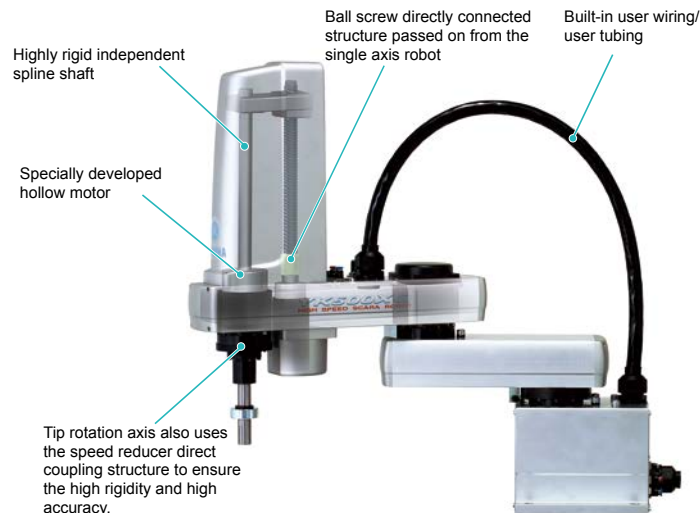


YK-XG POINT 1

Completely beltless structure

A completely beltless structure was achieved using a ZR-axis direct coupling structure. This completely beltless structure greatly reduces waste motion. This structure also maintains high accuracy for an extended period of time. Additionally, this structure ensures maintenance-free operation for an extended period of time without worrying about belt breakage, elongation, or secular deterioration (except for Orbit type and large type).

Conventional model



YK-XG series

