


YRG Series

Simple gripper operation and control via the YAMAHA robot language. Just install a gripper control board into the controller and set the electrical gripper as an additional robot axis.

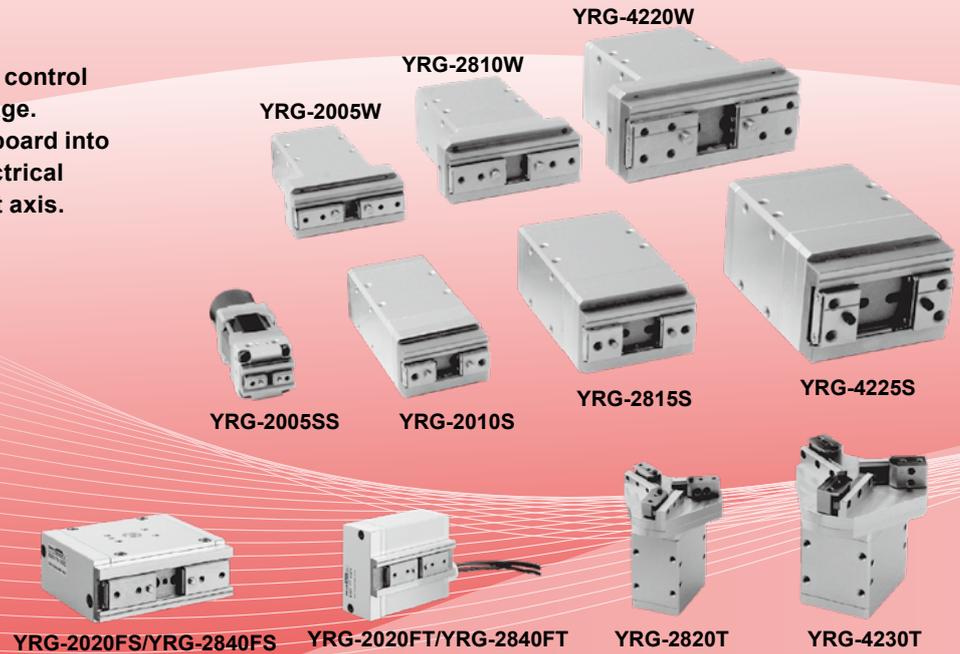


Structure

● Single cam structure



Unique cam structure is simple and compact. The fingers work due to external force since no self-locking is used.

● Double cam structure



Unique double cam structure with gear. Simple design gives high gripping power yet body is compact.

● Ball screw structure



Belt-driven ground ball screw delivers a long stroke with high efficiency and high precision.


● Compact ball guide structure



Use of special cams provides light weight and compactness. Ideal for grasping and moving a round workpiece made of glass or similar material.

System configuration illustration

● RCX320/RCX340

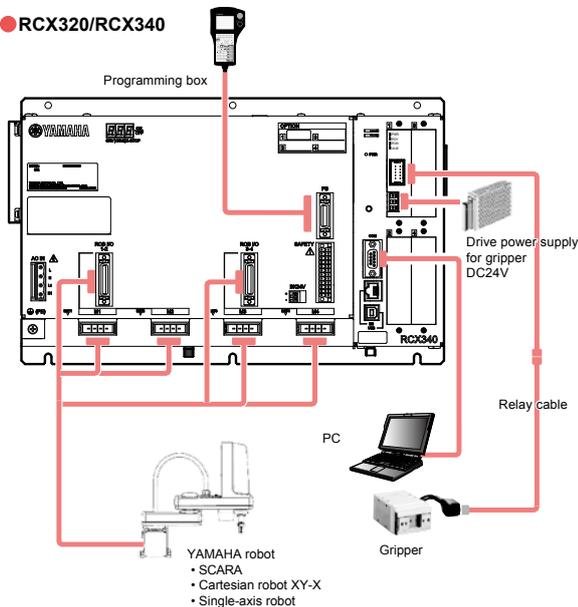

Compact single cam type

YRG-2005SS



Basic specifications


Model name		YRG-2005SS
Model number		KCF-M2010-A0
Holding power	Max. continuous rating (N)	5
	Min. setting (% (N))	30 (1.5)
	Resolution (% (N))	1 (0.05)
Open/close stroke (mm)		3.2
Speed	Max. rating (mm/sec)	100
	Min. setting (% (mm/sec))	20 (20)
	Resolution (% (mm/sec))	1 (1)
	Holding speed (Max.) (%)	50
Repetitive positioning accuracy (mm)		+/-0.02
Guide mechanism		Linear guide
Max. holding weight ^{Note 1} (kg)		0.05
Weight (g)		90

- Holding power control: 30 to 100% (1% steps)
- Acceleration control : 1 to 100% (1% steps)
- Speed control : 20 to 100% (1% steps)
- Multipoint position control : 10,000 max.

Note. Design the finger as short and lightweight as possible.
 Note. Set the parameters and holding power (%) of the holding movement command so that any excessive shock is not applied to the finger during operation.
 Note. When installing or uninstalling the finger, tighten the bolts while the finger is being held securely so that any excessive force or shock is not applied to the guide block.
 Note. Workpiece weight that is able to be held may greatly vary depending on the material, shape, and/or holding surface conditions of the finger.

Note 1. The maximum gripping weight is the upper limit weight when the workpiece is gripped with maximum continuous rated gripping force.
 Determine the weight of the workpiece to be gripped by considering the upper limit weight and the inertia force due to acceleration/deceleration and rotary operation in the gripped state.

Gripping power vs. gripping power setting (%)

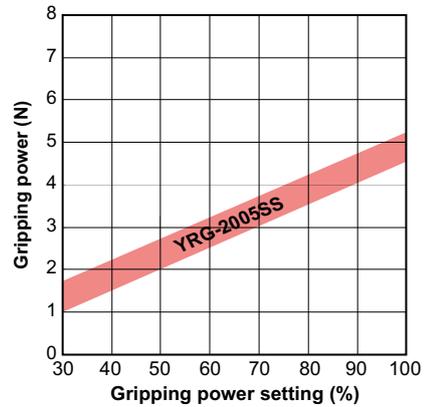


- Graph shows a general guide to gripping power versus gripping power setting (%). Variations will appear in the actual gripping power.


Allowable load and load moment

		YRG-2005SS		
Guide	Allowable load	F	N	12
	Allowable pitching moment	Mp	N·m	0.04
	Allowable yawing moment	My	N·m	0.04
	Allowable rolling moment	Mr	N·m	0.08
Finger	Max. weight (1 pair)		g	10
	Max. holding position	L	mm	20
	Max. overhang	H	mm	20

- Mount the finger so that the allowable load and load moment of the guide do not exceed the values stated in the table above.
- Make the adjustment so that the finger weight, holding length (L) from the installation surface to the holding point, and overhang (H) do not exceed the values stated in the table above.
- Please contact your YAMAHA sales dealer for further information on combination of L and H.



YRG-2005SS

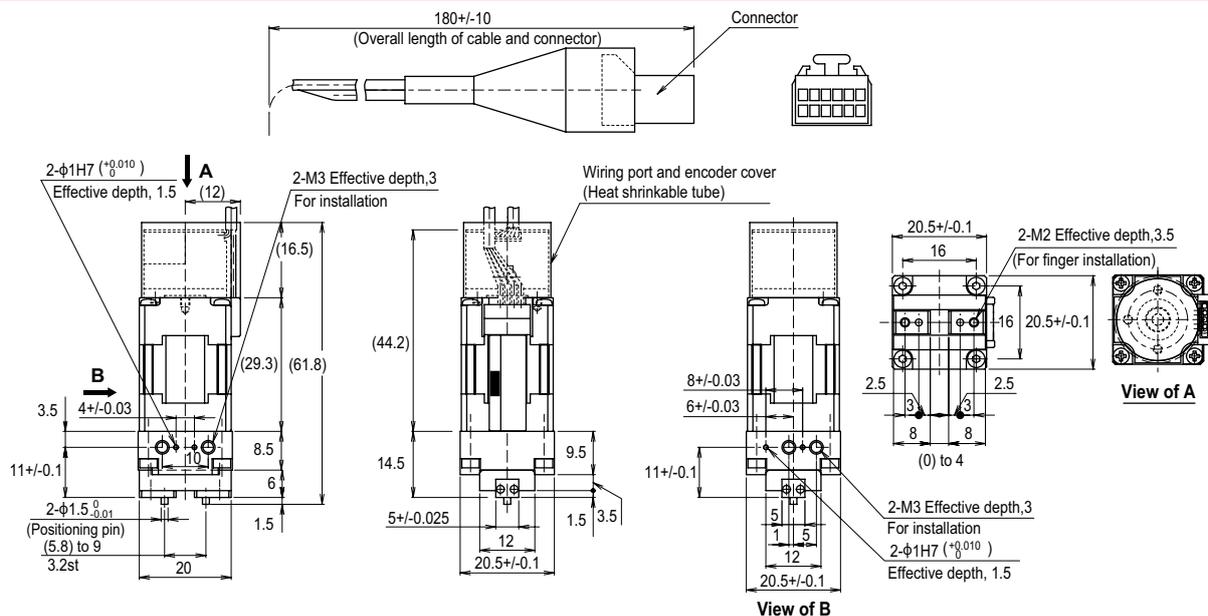

Note. Avoid extreme winding of the cable and fix the cable securely so that it does not move. Take appropriate measures so that any excessive force is not applied to the root of the cable.

Linear conveyor modules LCMR200
 Single-axis robots GX
 Linear conveyor modules LCM100
 SCARA robots YK-X
 Single-axis robots Robomity
 Linear motor PHASER
 Single-axis robots FLIP-X
 Single-axis robots TRANSERO
 Compact Cartesian robots XX-X
 Pick & place robots YP-X
 CLEAN CONTROLLER INFORMATION
 Robot positioner
 Pulse string driver
 Robot controller
 Electric gripper
 Option

YRG Series

Single cam type

YRG-2010S/2815S/4225S



Basic specifications

Model name	YRG-2010S	YRG-2815S	YRG-4225S	
Model number	KCF-M2011-A0	KCF-M2011-B0	KCF-M2011-C0	
Holding power	Max. continuous rating (N)	6	22	40
	Min. setting (% (N))	30 (1.8)	30 (6.6)	30 (12)
	Resolution (% (N))	1 (0.06)	1 (0.22)	1 (0.4)
Open/close stroke (mm)		7.6	14.3	23.5
	Max. rating (mm/sec)	100		
	Min. setting (% (mm/sec))	20 (20)		
Speed	Resolution (% (mm/sec))	1 (1)		
	Holding speed (Max.) (%)	50		
	Repetitive positioning accuracy (mm)	+/-0.02		
Guide mechanism	Linear guide			
Max. holding weight ^{Note 1} (kg)	0.06	0.22	0.4	
Weight (g)	160	300	580	

• Holding power control: 30 to 100% (1% steps) • Speed control: 20 to 100% (1% steps)
 • Acceleration control : 1 to 100% (1% steps) • Multipoint position control: 10,000 max.

Note. Design the finger as short and lightweight as possible.


Note. Set the parameters and holding power (%) of the holding movement command so that any excessive shock is not applied to the finger during operation.

Note. When installing or uninstalling the finger, tighten the bolts while the finger is being held securely so that any excessive force or shock is not applied to the guide block.

Note. Workpiece weight that is able to be held may greatly vary depending on the material, shape, and/or holding surface conditions of the finger.

Note 1. The maximum gripping weight is the upper limit weight when the workpiece is gripped with maximum continuous rated gripping force.
 Determine the weight of the workpiece to be gripped by considering the upper limit weight and the inertia force due to acceleration/deceleration and rotary operation in the gripped state.

Gripping power vs. gripping power setting (%)

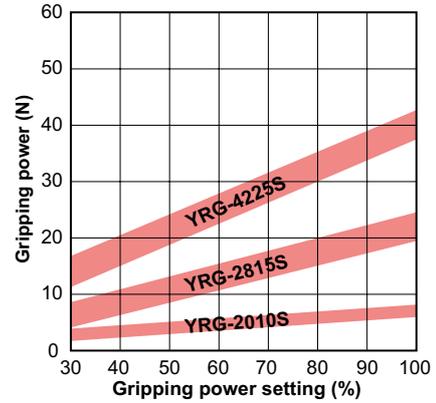

• Graph shows a general guide to gripping power versus gripping power setting (%). Variations will appear in the actual gripping power.


Allowable load and load moment

			YRG-2010S	YRG-2815S	YRG-4225S
Guide	Allowable load	F N	450	350	600
	Allowable pitching moment	Mp N•m	0.7	0.5	1.1
	Allowable yawing moment	My N•m	0.8	0.6	1.3
	Allowable rolling moment	Mr N•m	2.3	2.8	8.6
Finger	Max. weight (1 pair)	g	15	30	50
	Max. holding position	L mm	20	20	25
	Max. overhang	H mm	20	25	30


• Mount the finger so that the allowable load and load moment of the guide do not exceed the values stated in the table above.

• Make the adjustment so that the finger weight, holding length (L) from the installation surface to the holding point, and overhang (H) do not exceed the values stated in the table above.

• Please contact your YAMAHA sales dealer for further information on combination of L and H.



YRG-2010S/2815S/4225S

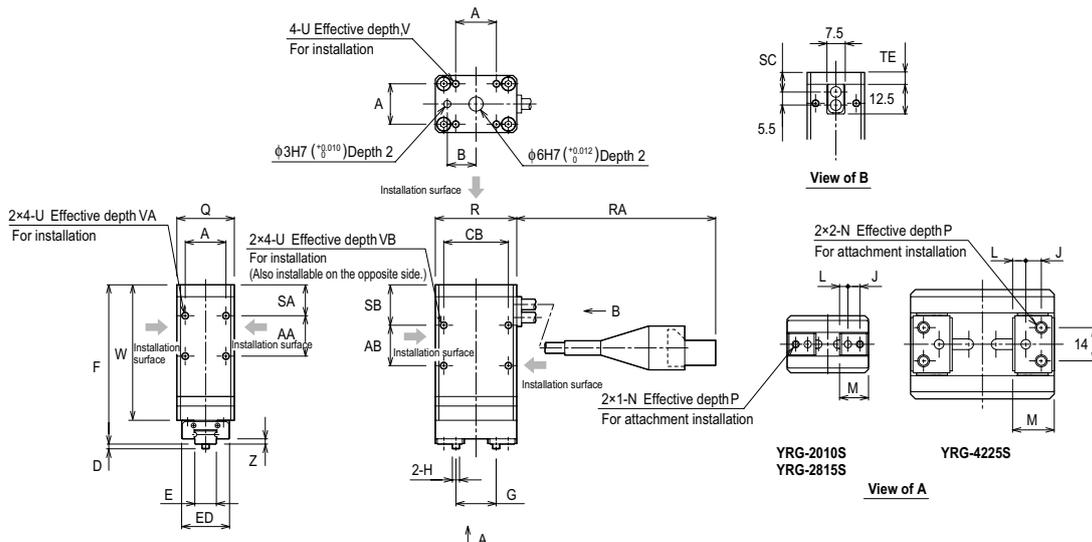

	A	AA	AB	B	CB	D	E	ED	F	G	H	J	L
YRG-2010S	17	17	17	12	27	2	9 ⁰ _{-0.05}	20	71	8.4 to 16	φ3 ⁰ _{-0.01}	5	3.5
YRG-2815S	24	24	14	15	38	2	14 ⁰ _{-0.05}	25	78	9.6 to 23.9	φ3 ⁰ _{-0.01}	6	4.3
YRG-4225S	36	25	13	20	50	3	24 ⁰ _{-0.05}	40	86	12 to 35.5	φ4 ⁰ _{-0.012}	6.5	5.5

	M	N	P	Q	R	RA	SA	SB	SC	TE	U	V	VA	VB	W	Z
YRG-2010S	12.1	M3	5	24	34	165+/-10	13	17	8.3	5	M3	5	6	6	61	2.2
YRG-2815S	15	M4	5	32	46	140+/-10	16	21	9.3	6	M4	6	8	8	69	2
YRG-4225S	17.4	M5	8	46	60	235+/-10	18	24	10.8	7.5	M5	7.5	8	10	72	3

Double cam type

YRG-2005W/2810W/4220W



Basic specifications

Model name	YRG-2005W	YRG-2810W	YRG-4220W	
Model number	KCF-M2012-A0	KCF-M2012-B0	KCF-M2012-C0	
Holding power	Max. continuous rating (N)	50	150	250
	Min. setting (% (N))	30 (15)	30 (45)	30 (75)
	Resolution (% (N))	1 (0.5)	1 (1.5)	1 (2.5)
Open/close stroke (mm)	5	10	19.3	
Speed	Max. rating (mm/sec)	60	60	45
	Min. setting (% (mm/sec))	20 (12)	20 (12)	20 (9)
	Resolution (% (mm/sec))	1 (0.6)	1 (0.7)	1 (0.45)
	Holding speed (Max.) (%)	50		
Repetitive positioning accuracy (mm)	±0.03			
Guide mechanism	Linear guide			
Max. holding weight ^{Note 1} (kg)	0.5	1.5	2.5	
Weight (g)	200	350	800	

- Holding power control : 30 to 100% (1% steps)
- Acceleration control : 1 to 100% (1% steps)
- Speed control : 20 to 100% (1% steps)
- Multipoint position control : 10,000 max.


Note. Design the finger as short and lightweight as possible. Note. Set the parameters and holding power (%) of the holding movement command so that any excessive shock is not applied to the finger during operation.

Note. When installing or uninstalling the finger, tighten the bolts while the finger is being held securely so that any excessive force or shock is not applied to the guide block.

Note. Workpiece weight that is able to be held may greatly vary depending on the material, shape, and/or holding surface conditions of the finger.

Note 1. The maximum gripping weight is the upper limit weight when the workpiece is gripped with maximum continuous rated gripping force. Determine the weight of the workpiece to be gripped by considering the upper limit weight and the inertia force due to acceleration/deceleration and rotary operation in the gripped state.

Gripping power vs. gripping power setting (%)

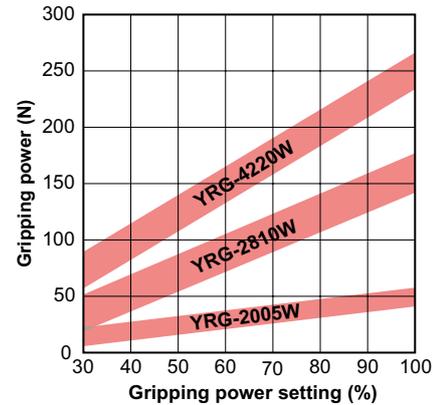


- Graph shows a general guide to gripping power versus gripping power setting (%). Variations will appear in the actual gripping power.


Allowable load and load moment

				YRG-2005W	YRG-2810W	YRG-4220W
Guide	Allowable load	F	N	1000	1000	2000
	Allowable pitching moment	Mp	N·m	6.7	8.1	20.1
	Allowable yawing moment	My	N·m	4	4.8	12
	Allowable rolling moment	Mr	N·m	5.1	7.8	25.9
Finger	Max. weight (1 pair)			40	80	200
	Max. holding position	L	mm	30	30	50
	Max. overhang	H	mm	20	20	30

- Mount the finger so that the allowable load and load moment of the guide do not exceed the values stated in the table above.
- Make the adjustment so that the finger weight, holding length (L) from the installation surface to the holding point, and overhang (H) do not exceed the values stated in the table above.
- Please contact your YAMAHA sales dealer for further information on combination of L and H.



YRG-2005W/2810W/4220W

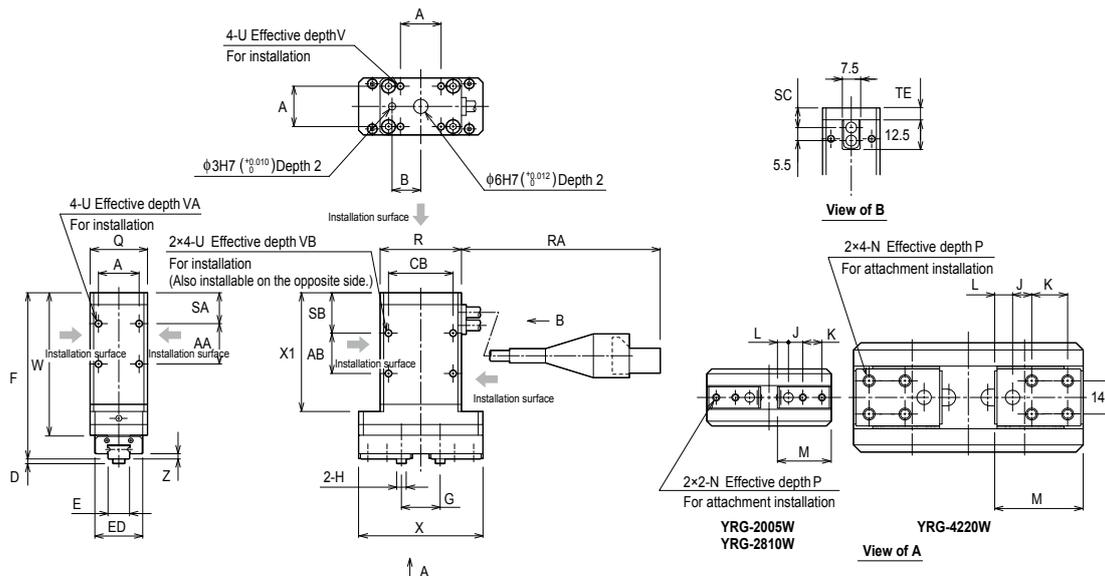

	A	AA	AB	B	CB	D	E	ED	F	G	H	J	K	L
YRG-2005W	17	17	17	12	27	2	9 ⁰ / _{-0.05}	20	74	10.6 to 15.6	φ4 ⁰ / _{-0.012}	6	8	4.6
YRG-2810W	24	24	14	15	38	2	14 ⁰ / _{-0.05}	25	80	12.6 to 22.6	φ5 ⁰ / _{-0.012}	7	10	5.65
YRG-4220W	36	25	13	20	50	3	24 ⁰ / _{-0.05}	40	90	17.0 to 36.3	φ6 ⁰ / _{-0.012}	8	15	7.5

	M	N	P	Q	R	RA	SA	SB	SC	TE	U	V	VA	VB	W	X	X1	Z
YRG-2005W	22.5	M3	5	24	34	165±/10	13	17	8.3	5	M3	5	6	6	64	52	54	2.2
YRG-2810W	27.5	M4	5	32	46	140±/10	16	21	9.3	6	M4	6	8	8	71	67	61	2
YRG-4220W	37	M5	8	46	60	235±/10	18	24	10.8	7.5	M5	7.5	8	10	76	96	63	3

YRG Series

Screw type straight style

YRG-2020FS/2840FS



Basic specifications


Model name	YRG-2020FS	YRG-2840FS
Model number	KCF-M2013-A0	KCF-M2013-B0
Holding power	Max. continuous rating (N)	50
	Min. setting (% (N))	30 (15)
	Resolution (% (N))	1 (0.5)
Open/close stroke (mm)	Max. rating (mm/sec)	50
	Min. setting (% (mm/sec))	20 (10)
	Resolution (% (mm/sec))	1 (0.5)
	Holding speed (Max.) (%)	50
Repetitive positioning accuracy (mm)	+/-0.01	+/-0.01
Guide mechanism	Linear guide	
Max. holding weight ^{Note 1} (kg)	0.5	1.5
Weight (g)	420	880

- Holding power control : 30 to 100% (1% steps)
- Acceleration control : 1 to 100% (1% steps)
- Speed control : 20 to 100% (1% steps)
- Multipoint position control : 10,000 max.

Note. Design the finger as short and lightweight as possible.
 Note. Set the parameters and holding power (%) of the holding movement command so that any excessive shock is not applied to the finger during operation.
 Note. When installing or uninstalling the finger, tighten the bolts while the finger is being held securely so that any excessive force or shock is not applied to the guide block.
 Note. Workpiece weight that is able to be held may greatly vary depending on the material, shape, and/or holding surface conditions of the finger.

Note 1. The maximum gripping weight is the upper limit weight when the workpiece is gripped with maximum continuous rated gripping force.
 Determine the weight of the workpiece to be gripped by considering the upper limit weight and the inertia force due to acceleration/deceleration and rotary operation in the gripped state.

Gripping power vs. gripping power setting (%)

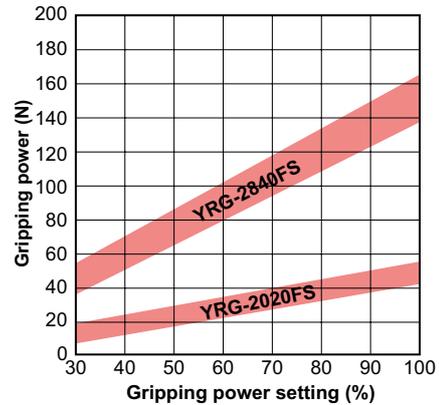


• Graph shows a general guide to gripping power versus gripping power setting (%). Variations will appear in the actual gripping power.


Allowable load and load moment

			YRG-2020FS	YRG-2840FS
Guide	Allowable load	F N	1000	1300
	Allowable pitching moment	Mp N·m	3.5	5
	Allowable yawing moment	My N·m	4.2	6
	Allowable rolling moment	Mr N·m	7.3	12.7
Finger	Max. weight (1 pair)	g	40	80
	Max. holding position	L mm	30	30
	Max. overhang	H mm	20	20

- Mount the finger so that the allowable load and load moment of the guide do not exceed the values stated in the table above.
- Make the adjustment so that the finger weight, holding length (L) from the installation surface to the holding point, and overhang (H) do not exceed the values stated in the table above.
- Please contact your YAMAHA sales dealer for further information on combination of L and H.



YRG-2020FS/2840FS

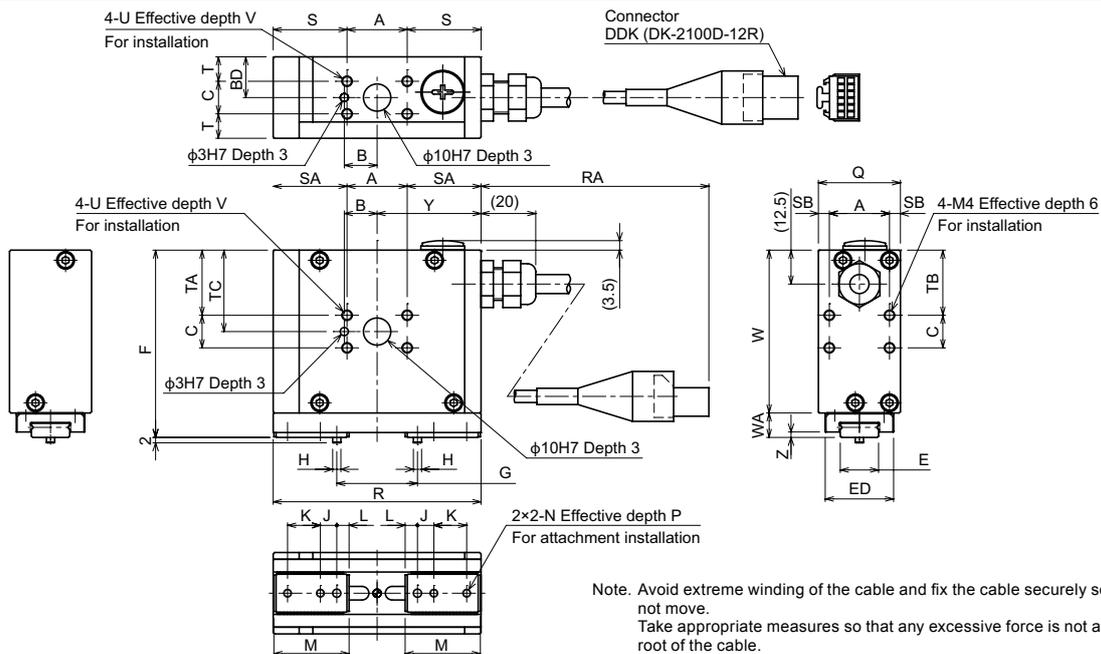

Note. Avoid extreme winding of the cable and fix the cable securely so that it does not move.
 Take appropriate measures so that any excessive force is not applied to the root of the cable.

	A	B	BD	C	D	E	ED	F	G	H	J	K	L	M	N
YRG-2020FS	22	12	15	12	2	14 ⁰ _{-0.05}	25	69	10.5 to 29.5	φ3 ⁰ _{-0.01}	6	12	4.5	27.5	M3
YRG-2840FS	30	15	20	16	2	18 ⁰ _{-0.05}	30	84	13 to 51	φ4 ⁰ _{-0.012}	8	14	5.5	34.5	M4

	P	Q	R	RA	S	SA	SB	T	TA	TB	TC	TD	U	V	W	WA	Y	Z
YRG-2020FS	5	30	76	175+/-10	27	27	4	9	24	24	30	12.5	M4	6	60	9	38	2
YRG-2840FS	7.5	40	110	135+/-10	40	40	5	12	28	28	36	14	M5	7.5	72	12	55	3

Screw type "T" style

YRG-2020FT/2840FT



Basic specifications

Model name	YRG-2020FT	YRG-2840FT	
Model number	KCF-M2014-A0	KCF-M2014-B0	
Holding power	Max. continuous rating (N)	50	150
	Min. setting (% (N))	30 (15)	30 (45)
	Resolution (% (N))	1 (0.5)	1 (1.5)
Open/close stroke (mm)	19	38	
Speed	Max. rating (mm/sec)	50	50
	Min. setting (% (mm/sec))	20 (10)	20 (10)
	Resolution (% (mm/sec))	1 (0.5)	1 (0.5)
	Holding speed (Max.) (%)	50	50
Repetitive positioning accuracy (mm)	+/-0.01	+/-0.01	
Guide mechanism	Linear guide		
Max. holding weight ^{Note 1} (kg)	0.5	1.5	
Weight (g)	420	890	


- Holding power control : 30 to 100% (1% steps)
- Speed control : 20 to 100% (1% steps)
- Acceleration control : 1 to 100% (1% steps)
- Multipoint position control : 10,000 max.

Note. Design the finger as short and lightweight as possible.
 Note. Set the parameters and holding power (%) of the holding movement command so that any excessive shock is not applied to the finger during operation.
 Note. When installing or uninstalling the finger, tighten the bolts while the finger is being held securely so that any excessive force or shock is not applied to the guide block.

Note. Workpiece weight that is able to be held may greatly vary depending on the material, shape, and/or holding surface conditions of the finger.

Note 1. The maximum gripping weight is the upper limit weight when the workpiece is gripped with maximum continuous rated gripping force.
 Determine the weight of the workpiece to be gripped by considering the upper limit weight and the inertia force due to acceleration/deceleration and rotary operation in the gripped state.

Gripping power vs. gripping power setting (%)

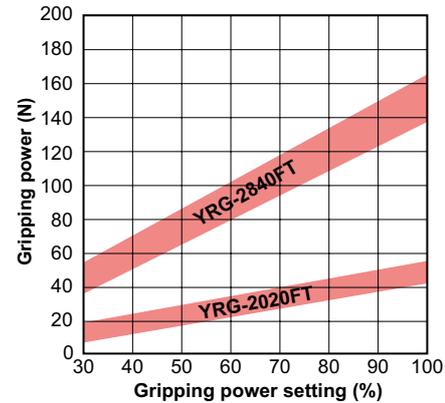


- Graph shows a general guide to gripping power versus gripping power setting (%). Variations will appear in the actual gripping power.


Allowable load and load moment

Guide	Allowable load	YRG-2020FT		YRG-2840FT	
		F	N		
	Allowable load		1000		1300
	Allowable pitching moment	Mp	N·m	3.5	5
	Allowable yawing moment	My	N·m	4.2	6
	Allowable rolling moment	Mr	N·m	7.3	12.7
Finger	Max. weight (1 pair)		g	40	80
	Max. holding position	L	mm	30	30
	Max. overhang	H	mm	20	20

- Mount the finger so that the allowable load and load moment of the guide do not exceed the values stated in the table above.
- Make the adjustment so that the finger weight, holding length (L) from the installation surface to the holding point, and overhang (H) do not exceed the values stated in the table above.
- Please contact your YAMAHA sales dealer for further information on combination of L and H.



YRG-2020FT/2840FT

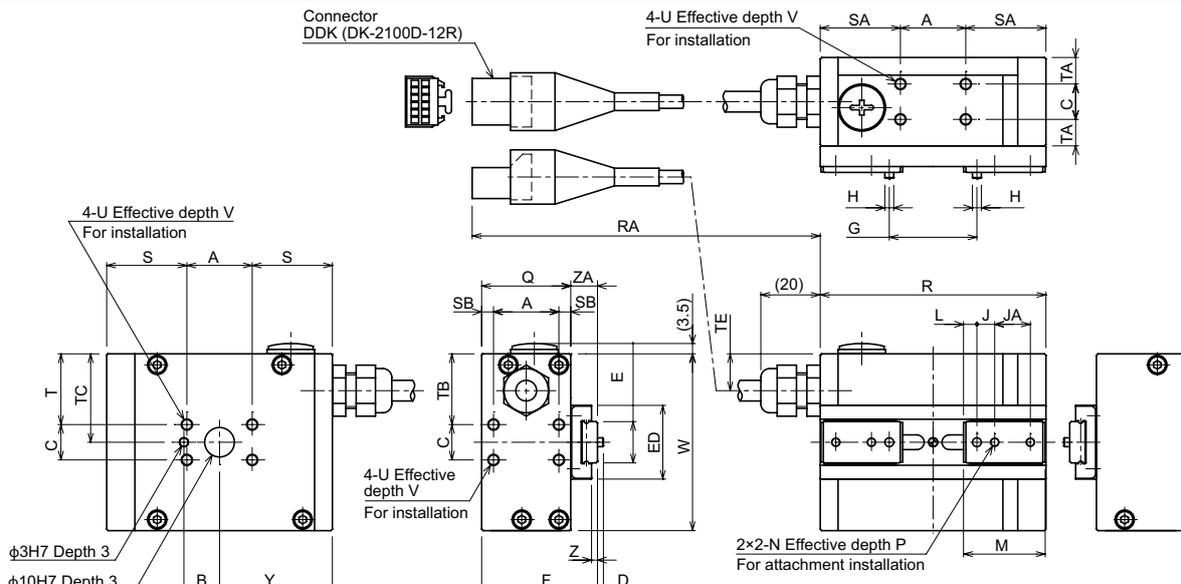

Note. Avoid extreme winding of the cable and fix the cable securely so that it does not move.
 Take appropriate measures so that any excessive force is not applied to the root of the cable.

	A	B	C	D	E	ED	F	G	H	J	JA	K	L	M	N	P
YRG-2020FT	22	12	12	2	14 _{0-0.05}	25	39	10.5 to 29.5	φ3 _{0-0.01}	6	12	12	4.5	27.5	M3	5
YRG-2840FT	30	15	16	2	18 _{0-0.05}	30	52	13 to 51	φ4 _{0-0.012}	8	14	14	5.5	34.5	M4	7.5

	Q	R	RA	S	SA	SB	T	TA	TB	TC	TD	TE	U	V	W	Y	Z	ZA
YRG-2020FT	30	76	175+/-10	27	27	4	24	9	24	30	12.5	12.5	M4	6	60	38	2	9
YRG-2840FT	40	110	135+/-10	40	40	5	28	12	28	36	14	14	M5	7.5	72	55	3	12

YRG Series

Three fingers type

YRG-2820T/4230T



Basic specifications

Model name	YRG-2820T	YRG-4230T
Model number	KCF-M2015-C0	KCF-M2015-D0
Holding power	Max. continuous rating (N)	10
	Min. setting (% (N))	30 (3)
	Resolution (% (N))	1 (0.1)
Open/close stroke (mm)		20
		30
Speed	Max. rating (mm/sec)	100
	Min. setting (% (mm/sec))	20 (20)
	Resolution (% (mm/sec))	1 (1)
	Holding speed (Max.) (%)	50
Repetitive positioning accuracy (mm)	+/-0.03	
Guide mechanism	Linear guide	
Max. holding weight ^{Note 1} (kg)	0.1	0.2
Weight (g)	340	640


- Holding power control : 30 to 100% (1% steps)
- Acceleration control : 1 to 100% (1% steps)
- Speed control : 20 to 100% (1% steps)
- Multipoint position control : 10,000 max.

Note. Design the finger as short and lightweight as possible.
 Note. Set the parameters and holding power (%) of the holding movement command so that any excessive shock is not applied to the finger during operation.

Note. When installing or uninstalling the finger, tighten the bolts while the finger is being held securely so that any excessive force or shock is not applied to the guide block.
 Note. Workpiece weight that is able to be held may greatly vary depending on the material, shape, and/or holding surface conditions of the finger.

Note 1. The maximum gripping weight is the upper limit weight when the workpiece is gripped with maximum continuous rated gripping force.
 Determine the weight of the workpiece to be gripped by considering the upper limit weight and the inertia force due to acceleration/deceleration and rotary operation in the gripped state.

Gripping power vs. gripping power setting (%)

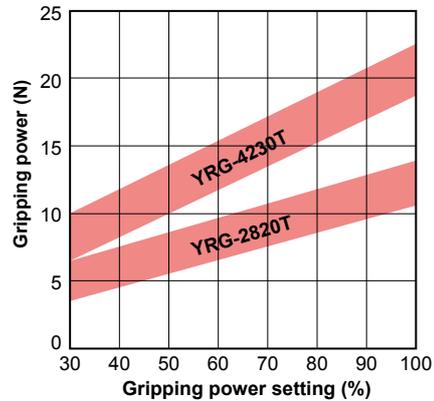

• Graph shows a general guide to gripping power versus gripping power setting (%). Variations will appear in the actual gripping power.

Allowable load and load moment


		YRG-2013T	YRG-2820T	YRG-4230T
Finger	Allowable load	N	20	30
	Allowable pitching moment	N·m	0.1	0.2
	Max. weight (1 pair)	g	20	30
	Max. holding position	L mm	20	30

• When the external forces Fa and Fb are applied to a portion the distance (L) apart from the finger installation surface, the load (F) and moment (M) are calculated from the formulas shown below.


$$F = Fa + W \times g$$

$$M = Fb \times L$$

Fa : External force [N]
 Fb : External force [N]
 W : Workpiece weight [Kg]
 g : Gravity acceleration [m/s²]
 H : Distance of holding point [m]

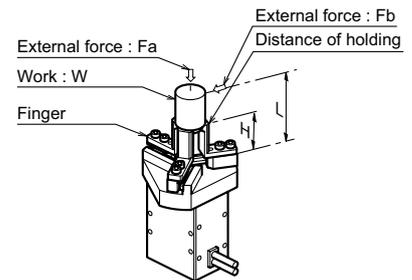

YRG-2820T/4230T

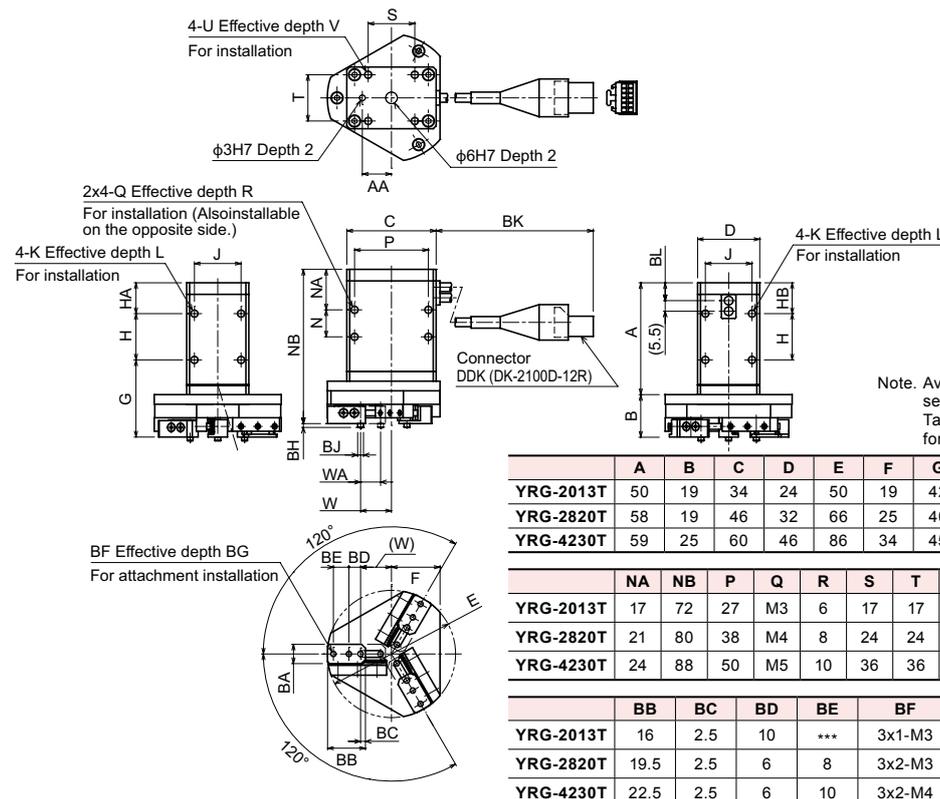

Note. Avoid extreme winding of the cable and fix the cable securely so that it does not move. Take appropriate measures so that any excessive force is not applied to the root of the cable.

	A	B	C	D	E	F	G	H	HA	HB	J	K	L	N
YRG-2013T	50	19	34	24	50	19	42	17	13	13	17	M3	6	17
YRG-2820T	58	19	46	32	66	25	40	24	16	16	24	M4	8	14
YRG-4230T	59	25	60	46	86	34	45	25	18	18	36	M5	8	13

	NA	NB	P	Q	R	S	T	U	V	W	WA	AA	BA
YRG-2013T	17	72	27	M3	6	17	17	M3	5	11.4 to 4.6	6.8st	12	10 ⁰ _{-0.02}
YRG-2820T	21	80	38	M4	8	24	24	M4	6	15.9 to 5.6	10.3st	15	10 ⁰ _{-0.02}
YRG-4230T	24	88	50	M5	10	36	36	M5	7.5	21.9 to 6.6	15.3st	20	14 ⁰ _{-0.02}

	BB	BC	BD	BE	BF	BG	BH	BJ	BK	BL
YRG-2013T	16	2.5	10	***	3x1-M3	8	2	φ3 ⁰ _{-0.01}	165+/-10	8.3
YRG-2820T	19.5	2.5	6	8	3x2-M3	6	2	φ3 ⁰ _{-0.01}	140+/-10	9.3
YRG-4230T	22.5	2.5	6	10	3x2-M4	8	3	φ4 ⁰ _{-0.012}	235+/-10	10.8

Electric gripper basic specifications


Item		Specifications
Basic specifications	Applicable controller	RCX320 / RCX340
	Number of connection grippers	Max. 4 units
Axis control	Control method	PTP motion
	Min. setting unit	0.01mm
	Position indication unit	Pulses, mm (millimeters)
	Speed setting	20 to 100% (in 1% steps, Changeable by the program.)
Programming	Acceleration setting	1 to 100% (in 1% steps, Setting by the acceleration parameter)
	Teaching	MDI (coordinate data input), direct teaching, teaching playback, offline teaching (data input from external unit)

Gripper control board specifications

Item		Specifications
Axis control	No. of axes	1 axis
	Position detection method	Optical rotary encoder
	Min. setting distance	0.01mm
	Speed setting	Set in the range of 20 to 100% to the max. parameter speed.
Protective alarm		Overcurrent, overload, voltage failure, system failure, position deviation over, feedback error, etc.
LED status indication		POWER (Green), RUN (Green), READY (Yellow), ALARM (Red)
Power supply	Drive power	DC 24V +/-10% 1.0A Max.

Part names and functions

RCX320 / RCX340

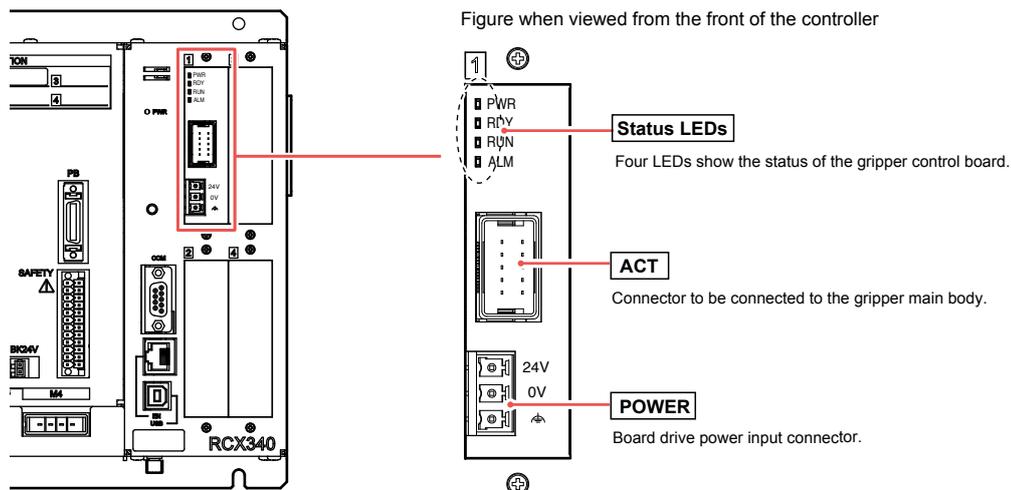

Linear conveyor modules
LCMR200

Single-axis robots
GX

Linear conveyor modules
LCM100

SCARA robots
YK-X

Single-axis robots
Robonity

Linear motor
PHASER

Single-axis robots
FLIP-X

Compact
single-axis robots
TRANSERO

Cartesian robots
XX-X

Pick & place robots
YP-X

CLEAN

CONTROLLER

INFORMATION

Robot positioner

Pulse string driver

Robot controller

Electric gripper

Option

Accessories and part options



YRG Series

Standard accessories

The icons indicated at the right end show the controllers that each component can use.

● Gripper control board

Model **KCX-M4400-G0**

RCX320

Note. This board includes a 24V supply connector.

RCX340/341

● Robot (for gripper) cable



Model	3.5m	KCF-M4751-31
	5m	KCF-M4751-51
	10m	KCF-M4751-A1

RCX320

RCX340/341

Note. Be sure to adjust the total length of the robot (for gripper) cable and relay cable to 14m or less.

● Relay cable



Model	0.5m	KCF-M4811-11
	1m	KCF-M4811-21
	1.5m	KCF-M4811-31
	2m	KCF-M4811-41
	2.5m	KCF-M4811-51
	3m	KCF-M4811-61
	3.5m	KCF-M4811-71
	4m	KCF-M4811-81

RCX320

RCX340/341

● Connector for 24V power supply



Model **KCF-M5382-00**

RCX320

RCX340/341

Linear conveyor modules
LCMR200

Single-axis robots
GX

Linear conveyor modules
LCM100

SCARA robots
YK-X

Single-axis robots
Robonity

Linear motor single-axis robots
PHASER

Single-axis robots
FLIP-X

Compact single-axis robots
TRANSERO

Cartesian robots
XY-X

Pick & place robots
YP-X

CLEAN

CONTROLLER

INFORMATION

Robot positioner

Pulse string driver

Robot controller

Electric gripper

Option