

Accessories and part options

TS-S2/TS-SH/TS-X/TS-P



Standard accessories

Power connector




Model KCC-M4421-00

TS-S2
TS-SH
TS-SD

Power connector (AC100V specifications)

Included when 100V model is purchased




Model KCA-M5382-00

TS-X
TS-P

Power connector (AC200V specifications)

Included when 200V model is purchased



Model KAS-M5382-00

LCC140
TS-X
TS-P
SR1-X
SR1-P
RCX320
RCX221
RCX222
RCX340

EXT connector

For braking power and safety circuit connections.



Model KCA-M5370-00

TS-X
TS-P

Dummy connector



Model KCA-M5163-00

TS-S2
TS-SH
TS-X
TS-P

I/O cables (2m/20-core*2)



Model KCA-M4421-20

TS-S2
TS-SH
TS-X
TS-P

Absolute battery

Absolute battery basic specifications

Item	For TS-X	For TS-SH
Battery type	Lithium metallic battery	
Battery capacity	3.6V / 1,650mAh	3.6V / 2,700mAh
Data holding time	About 1 year (in state with no power applied)	
Dimensions	φ18 × L60mm	φ17 × L53mm
Weight	24g	21g



For TS-X



For TS-SH


Model KCA-M53G0-10 (For TS-X)
KCA-M53G0-02 (For TS-SH)

Note. The absolute battery is subject to wear and requires replacement. If trouble occurs with the memory then remaining battery life is low so replace the absolute battery. The battery replacement period depends on usage conditions. But generally you should replace the battery after about 1 year counting the total time after connecting to the controller and left without turning on the power.

TS-X
TS-SH
RCX320
RCX340

CC-Link connector (CC-Link specifications)

Included when CC-Link model is purchased



Connector

Jump socket

Model Connector^{Note} KCA-M4872-00
Jump socket KCA-M4873-00

Note. This is a single connector type. (Insert two connectors into a branching socket.)

TS-S2
TS-SH
TS-X
TS-P

See next page for optional parts

Articulated robots YA
Linear conveyor modules LCM
Single-axis robots CX
Motor-less single-axis actuator Robotomy
Compact single-axis robots TRANSEVO
Single-axis robots FLIP-X
Linear motor PHASER
Cartesian robots XY-X
SCARA robots YK-X
Pick & Place robots YP-X
CLEAN
CONTROLLER
INFORMATION
Robot positioner
Pulse string driver
Robot controller
RCXVY2+ Electric gripper
Option

Options

● Handy terminal HT1/HT1-D

P.698



		HT1	HT1-D
Model	3.5m	KCA-M5110-0J	KCA-M5110-1J
	10m	KCA-M5110-6J	KCA-M5110-7J
Enable switch		–	3-position
CE marking		Not supported	Applicable

TS-S2
TS-SH
TS-X
TS-P

● Support software TS-Manager

P.688



Model	KCA-M4966-0J (Japanese)
	KCA-M4966-0E (English)

TS-S2
TS-SH
TS-X
TS-P
TS-SD

● TS-Manager environment

OS	Windows 2000, XP (32bit), Vista, 7, 8 / 8.1, 10 (Supported version: V.1.4.5 or later)
CPU	Exceeding the environment recommended by the OS being used
Memory	Exceeding the environment recommended by the OS being used
Hard disk	Vacant capacity of more than 20MB in the installation destination drive
Communication port	Serial (RS-232C), USB
Applicable controllers	TS series

Note. Windows is the registered trademark of US Microsoft Corporation in U.S.A. and other countries.

● Data cables

Communication cable for TS-Manager. Select from USB cable or D-sub cable.



Model	USB type (5m)	KCA-M538F-A0
	D-Sub type (5m)	KCA-M538F-01

Note. USB driver for communication cable can also be downloaded from our website.

TS-S2
TS-SH
TS-X
TS-P
TS-SD

● Daisy chain and gateway connection cable



Model	KCA-M532L-00 (300mm)
-------	----------------------

TS-S2
TS-SH
TS-X
TS-P
TS-SD

● CC-Link termination connector (CC-Link specifications)



Model	KCA-M4874-00
-------	--------------

TS-S2
TS-SH
TS-X
TS-P


● TS-Monitor (LCD monitor) P.702



Model	For TS-X	KCA-M5119-00
	For TS-P	KCA-M5119-10

TS-X
TS-P

● DIN rail mounting bracket (This bracket is provided in TS-SH as standard equipment.)

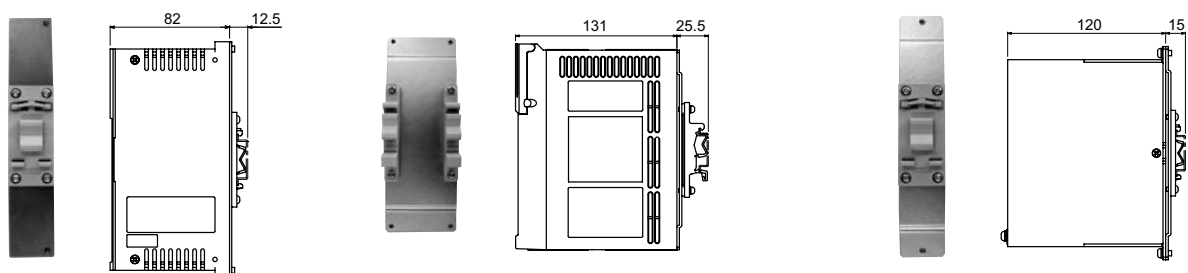

Model	For TS-S2 KCC-M499A-00
-------	---------------------------

TS-S2

Model	For TS-X / TS-P KCA-M499A-00
-------	---------------------------------

TS-X
TS-P

Model	For TS-X / TS-P with RGT KCA-M499A-10
-------	--

TS-X
TS-P