F8LH

Origin on the non-motor side is selectable

Ordering method

F8LH – [ ] – [ ] – [ ] – [ ] – [ ] – **TSX** – [ ] – [ ] – [ ] – [ ]

Model	Lead designation	Origin position change	Grease type	Stroke	Cable length Note 1
	20: 20mm 10: 10mm 5: 5mm	None: Standard Z: Non-motor side	None: Standard GC: Clean	150 to 1050 (50mm pitch)	3L:3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

Positioner Note 2	Driver: Power-supply voltage / Power capacity	LCD monitor	I/O selection	Battery
TSX: TS-X	105: 100V/100W or less 205: 200V/100W or less	No entry: None L: With LCD	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board Note 3	B: With battery (Absolute) N: None (Incremental)

SR1-X – **05** – [ ] – [ ] – [ ]

Controller	Driver: Power capacity	Usable for CE	I/O selection	Battery
	05: 100W or less	No entry: Standard E: CE marking	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)

RDV-X – **2** – **05** – **RBR1**

Driver	Power-supply voltage	Driver: Power capacity	Regenerative unit
	2: AC200V	05: 100W or less	

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.732 for details on robot cable.
Note 2. See P.634 for DIN rail mounting bracket.
Note 3. Select this selection when using the gateway function. For details, see P.96.

Specifications

AC servo motor output (W)		100		
Repeatability Note 1 (mm)		+/-0.01		
Deceleration mechanism		Ball screw ϕ15		
Ball screw lead (mm)		20	10	5
Maximum speed Note 2 (mm/sec)		1200	600	300
Maximum payload (kg)	Horizontal	30	60	80
Rated thrust (N)		84	169	339
Stroke (mm)		150 to 1050 (50mm pitch)		
Overall length (mm)	Horizontal	Stroke+368		
Maximum dimensions of cross section of main unit (mm)		W80 × H65		
Cable length (m)		Standard: 3.5 / Option: 5,10		
Linear guide type		4 rows of circular arc grooves × 1 rail		
Position detector		Resolvers Note 3		
Resolution (Pulse/rotation)		16384		

Note 1. Positioning repeatability in one direction.
Note 2. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang Note





Horizontal installation (Unit: mm)

		A	B	C
Lead 20	10kg	573	256	176
	20kg	334	116	81
	30kg	279	70	50
Lead 10	20kg	629	137	111
	20kg	479	57	47
	60kg	382	30	25
Lead 5	20kg	1094	148	127
	40kg	851	63	54
	60kg	714	34	29
	80kg	601	20	17

Wall installation (Unit: mm)

		A	B	C
Lead 20	10kg	147	215	515
	20kg	53	75	255
	30kg	20	29	160
Lead 10	20kg	80	99	545
	40kg	15	19	270
	60kg	-	-	-
Lead 5	20kg	96	112	1005
	40kg	22	26	604
	60kg	-	-	-
	80kg	-	-	-

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment



(Unit: N·m)

MY	MP	MR
128	163	143

Controller

Controller	Operation method
SR1-X05 RCX320 RCX221/222 RCX340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105 TS-X205	I/O point trace / Remote command
RDV-X205-RBR1	Pulse train control

F8LH

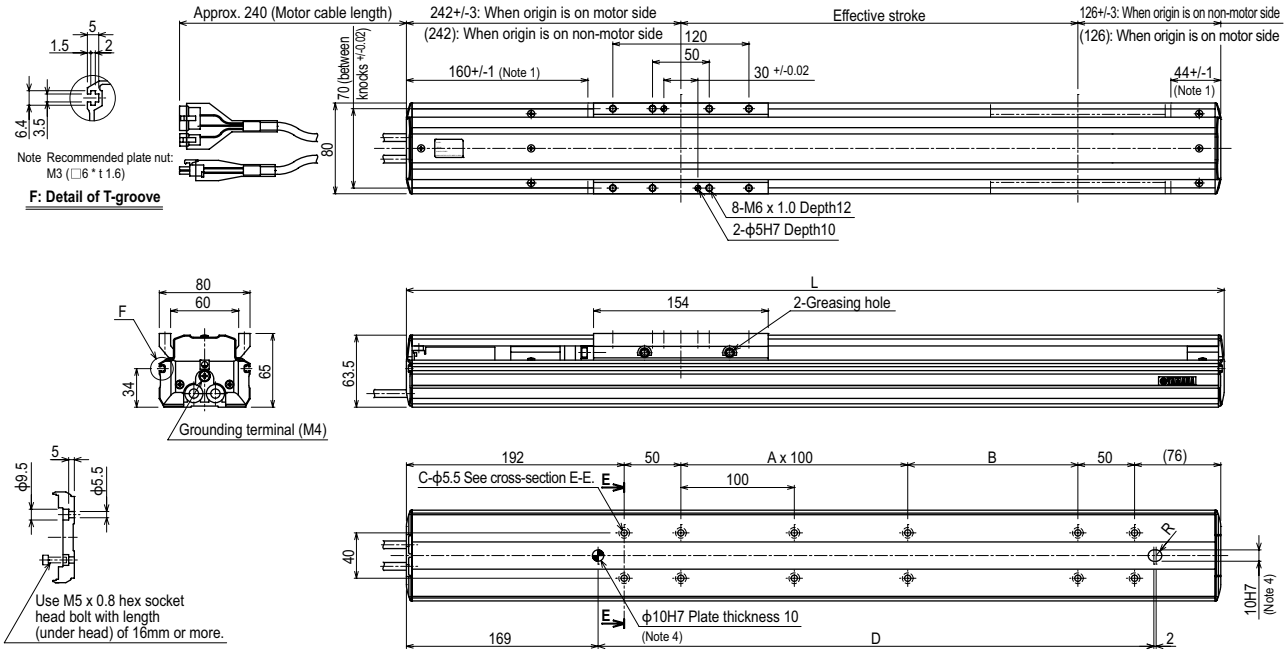

Effective stroke		150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
L		518	568	618	668	718	768	818	868	918	968	1018	1068	1118	1168	1218	1268	1318	1368	1418
A		0	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9
B		150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150
C		8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
D		290	340	390	440	490	540	590	640	690	740	790	840	890	940	990	1040	1090	1140	1190
Weight (kg)		4.7	5.0	5.3	5.6	5.9	6.2	6.6	6.9	7.2	7.5	7.8	8.1	8.4	8.7	9.0	9.3	9.7	10.0	10.3
Maximum speed Note 5 (mm/sec)	Lead 20	1200										1020	900	780	720	660	600	540	480	420
	Lead 10	600										510	450	390	360	330	300	270	240	210
	Lead 5	300										255	225	195	180	165	150	135	120	105
	Speed setting	–										85%	75%	65%	60%	55%	50%	45%	40%	35%

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. When installing the robot, do not use washers inside the robot body.
Note 3. Minimum bend radius of motor cable is R50.
Note 4. When using this ϕ10 knock-pin hole to position the robot body, the knockpin must not protrude more than 10mm inside the robot body.

Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

Controller SR1-X ▶ 652 TS-X ▶ 626 RDV-X ▶ 640