

SINGLE-AXIS ROBOTS

GX

SERIES

CONTENTS

■ Single-axis AC servo motor robot ... 192


GX05	192
GX05L	193
GX07	194
GX10	195
GX12	196
GX16	197
GX20	198

■ Reference drawing for mounting bending unit (example of right side mounting) ... 199

YA	Articulated robots
LCM	Linear conveyor modules
GX	Single-axis robots
Robonity	Motor-less single axis actuator
TRANSERO	Compact single-axis robots
FLIP-X	Single-axis robots
PHASER	Linear motor single-axis robots
XY-X	Cartesian robots
YK-X	SCARA robots
YP-X	Pick & place robots
CLEAN	CLEAN
CONTROLLER	CONTROLLER
INFORMATION	INFORMATION

GX05L

Single-axis AC servo motor robot



Ordering method

GX05L			EU					A10		
Model	Lead	Motor specification	Motor type ^{Note1}	Stroke	Cable length ^{Note2}	Cable entry location	Driver	Brake unit ^{Note3}	Absolute battery	
	20: 20mm 10: 10mm 5: 5mm	S40: Standard / With no brake BK40: Standard / With brake BL40: Battery-less absolute / With no brake BKBL40: Battery-less absolute / With brake		50 to 800 (50mm pitch)	R3: 3m R5: 5m R10: 10m	R: From rear of motor F: From front of motor	A10:YHX-A10-SET	V: With brake unit N: None	B: With absolute battery N: None	

Note 1. RoHS2 (EU) 2015/863 compliant motor
 Note 2. All robot cables are flexible cables. The robot cable dimensions drawing is provided on page 732.
 Note 3. The brake unit cannot be used with an external brake power input.

Specifications

Motor	40 □ / 100 W
Repeatability ^{Note 1}	+/-0.005 mm
Deceleration mechanism	Ground ball screw φ12 (Class C5)
Stroke	50 mm to 800 mm (50mm pitch)
Maximum speed ^{Note 2}	1333 mm/sec/666 mm/sec/333 mm/sec
Ball screw lead	20 mm 10 mm 5 mm
Maximum payload	Horizontal 12 kg 24 kg 32 kg Vertical 3 kg 6 kg 12 kg
Rated thrust	84 N 169 N 339 N
Maximum dimensions of cross section of main unit	W 48 mm × H 65 mm
Overall length (Horizontal)	ST + 230 mm
Overall length (Vertical)	ST + 270.5 mm
Degree of cleanliness ^{Note 3}	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air ^{Note 4}	30 Nℓ/min to 100 Nℓ/min
Controller	YHX series

Note 1. Positioning repeatability in one direction.
 Note 2. The maximum speed may not be reached if the travel distance is short or because of other operation conditions.
 If the effective stroke exceeds 600 mm, the ball screw may resonate. (Critical speed)
 At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.
 Note 3. When using in a clean environment, attach a suction air joint.
 The degree of cleanliness is the cleanliness when using at 1000 mm/sec or less.
 Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Static loading moment

	(Unit: N·m)		
	MY	MP	MR
	72	72	64

Allowable overhang^{Note}

GX05L-20	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)			
	A	B	C	A	B	C	A	B	C	
3kg	1755	559	426	3kg	396	486	1594	1kg	1486	1486
8kg	737	200	153	8kg	106	128	525	2kg	730	730
12kg	608	133	104	12kg	52	61	329	3kg	478	478

GX05L-10	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)			
	A	B	C	A	B	C	A	B	C	
6kg	2416	389	333	6kg	277	316	2192	4kg	555	555
12kg	1397	187	161	12kg	101	115	1084	6kg	360	360
24kg	875	87	74	24kg	12	14	276			

GX05L-5	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)			
	A	B	C	A	B	C	A	B	C	
10kg	3127	254	225	10kg	162	181	2800	5kg	501	501
20kg	1841	120	106	20kg	42	47	1273	10kg	235	235
32kg	1554	70	62	32kg	0	0	0	12kg	190	190

Note. Distance from center of slider upper surface to carrier center-of-gravity at a guide service life of 10,000 km.
 Note. Service life is calculated for 600mm stroke models.


Robot cable

R3R (3 m/extracted to rear)	Encoder cable + Power cable set model	KES-M4710-30
R5R (5 m/extracted to rear)	Encoder cable + Power cable set model	KES-M4710-50
R10R (10 m/extracted to rear)	Encoder cable + Power cable set model	KES-M4710-A0
R3F (3 m/extracted to front)	Encoder cable + Power cable set model	KES-M4720-30
R5F (5 m/extracted to front)	Encoder cable + Power cable set model	KES-M4720-50
R10F (10 m/extracted to front)	Encoder cable + Power cable set model	KES-M4720-A0

Driver unit

10A Spec.	Model	YHX-A10-SET
	Control method	Standard profile

GX05L

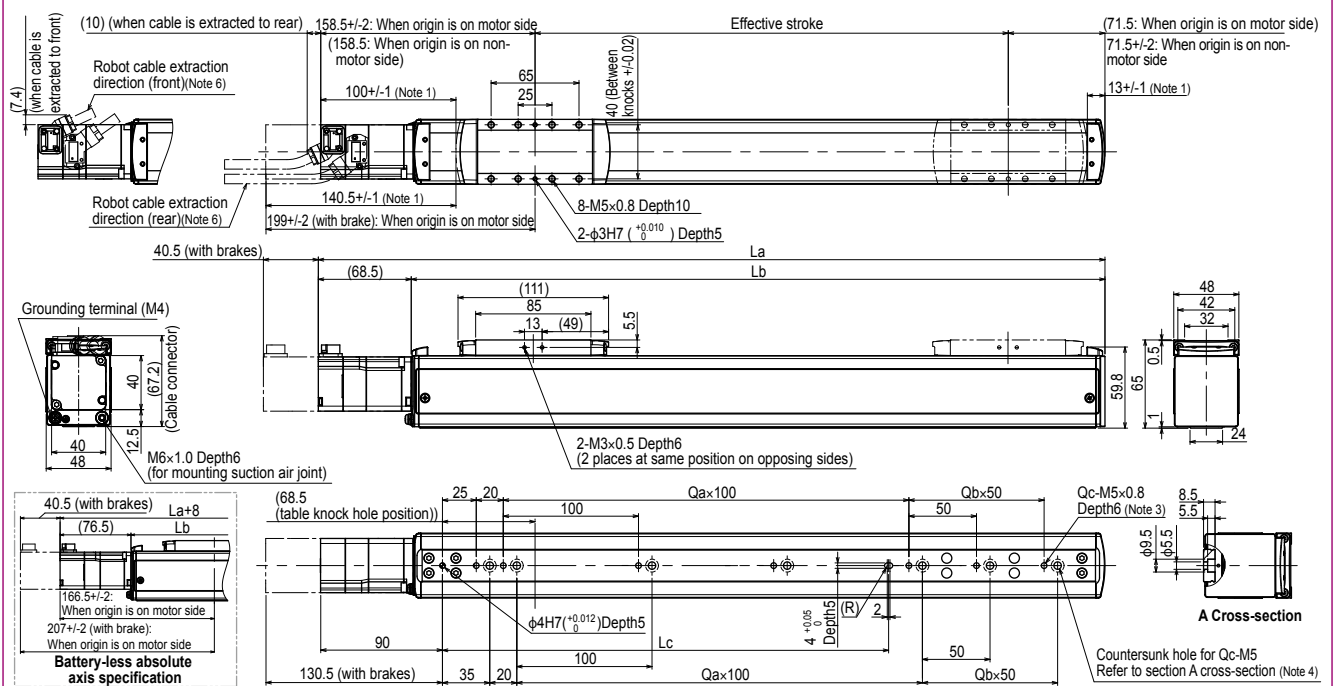

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Adjustments are required when changing the return-to-origin direction. (The standard origin is on the motor side.)
 Note 3. When using the tap holes to mount the body, remove the set screws first.

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
La	280	330	380	430	480	530	580	630	680	730	780	830	880	930	980	1030
Lb	211.5	261.5	311.5	361.5	411.5	461.5	511.5	561.5	611.5	661.5	711.5	761.5	811.5	861.5	911.5	961.5
Lc	130	130	130	130	330	330	330	330	330	330	630	630	630	630	630	630
Qa	1	1	1	1	3	3	3	3	3	3	6	6	6	6	6	6
Qb	0	1	2	3	0	1	2	3	4	5	0	1	2	3	4	5
Qc	3	4	5	6	5	6	7	8	9	10	8	9	10	11	12	13
Weight (kg) ^{Note 5}	1.8	1.9	2.1	2.2	2.4	2.6	2.7	2.9	3	3.2	3.3	3.5	3.6	3.8	3.9	4.1
Maximum speed (mm/sec)						1333							1066	933	800	666
Lead 20						666							532	466	400	333
Lead 10						333							266	233	200	166
Lead 5																
Speed setting													80%	70%	60%	50%

Note 4. When using the countersunk holes (section A cross-section) to mount the body, remove the cap from the inner side and then fix. The length under head of the hex socket head bolts (M5 x 0.8) used must be 15mm or less.
 Note 5. This is the weight without brakes. When brakes are mounted, the weight will be 0.2 kg heavier than the body weight given in the table.
 Note 6. The specifications of the robot cable will vary according to the extraction direction.
 Note 7. When secured in place, the minimum bending radius of the robot cable is R30.

GX07

Single-axis AC servo motor robot



Ordering method

GX07			EU				A10		
Model	Lead	Motor specification	Motor type ^{Note1}	Stroke	Cable length ^{Note2}	Cable entry location	Driver	Brake unit ^{Note3}	Absolute battery
	30: 30mm 20: 20mm 10: 10mm 5: 5mm	S40: Standard / With no brake BK40: Standard / With brake BL40: Battery-less absolute / With no brake BKBL40: Battery-less absolute / With brake		50 to 1100 (50mm pitch)	R3: 3m R5: 5m R10: 10m	R: From rear of motor F: From front of motor	A10:YHX-A10-SET	V: With brake unit N: None	B: With absolute battery N: None

Note 1. RoHS2 (EU) 2015/863 compliant motor
 Note 2. All robot cables are flexible cables. The robot cable dimensions drawing is provided on page 732.
 Note 3. The brake unit cannot be used with an external brake power input.

Specifications

Motor	40 □ / 100 W
Repeatability ^{Note 1}	+/-0.005 mm
Deceleration mechanism	Ground ball screw φ 15 (Class C5)
Stroke	50 mm to 1100 mm (50mm pitch)
Maximum speed ^{Note 2}	1800 mm/sec / 1200 mm/sec / 600 mm/sec / 300 mm/sec
Ball screw lead	30 mm 20 mm 10 mm 5 mm
Maximum payload	Horizontal 10 kg 25 kg 45 kg 85 kg Vertical 2 kg 4 kg 8 kg 16 kg
Rated thrust	56 N 84 N 169 N 339 N
Maximum dimensions of cross section of main unit	W 70 mm × H 76.5 mm
Overall length (Horizontal)	ST + 270.5 mm
Overall length (Vertical)	ST + 311 mm
Degree of cleanliness ^{Note 3}	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air ^{Note 4}	30 Nl/min to 115 Nl/min
Controller	YHX series

Note 1. Positioning repeatability in one direction.
 Note 2. The maximum speed may not be reached if the travel distance is short or because of other operation conditions. If the effective stroke exceeds 700 mm, the ball screw may resonate. (Critical speed)
 At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.
 Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness when using at 1000 mm/sec or less.
 Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Static loading moment


	(Unit: N·m)		
	MY	MP	MR
	138	121	121

Allowable overhang ^{Note}

GX07-30	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
2kg	3078 1509 1221	1237 1442 2975	1k 2335 2335
6kg	1191 501 418	6kg 393 435 1062	2kg 1158 1158
10kg	957 317 282	10kg 244 251 793	
GX07-20	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
10kg	1327 370 358	10kg 313 304 1164	1kg 3416 3416
20kg	1136 186 188	20kg 131 119 804	2kg 1701 1701
25kg	1509 163 173	25kg 109 97 1010	4kg 841 841
GX07-10	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
15kg	2420 338 372	15kg 306 271 2192	3kg 1688 1688
30kg	1531 160 176	30kg 106 94 1155	6kg 827 827
45kg	1181 101 111	45kg 39 34 623	8kg 612 612
GX07-5	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
30kg	2915 172 197	30kg 122 106 2458	6kg 907 907
50kg	2535 96 110	50kg 34 30 1476	9kg 591 591
85kg	2024 49 56	85kg 0 0 0	16kg 314 314

Note. Distance from center of slider upper surface to carrier center-of-gravity at a guide service life of 10,000 km.
 Note. Service life is calculated for 600mm stroke models.

GX07

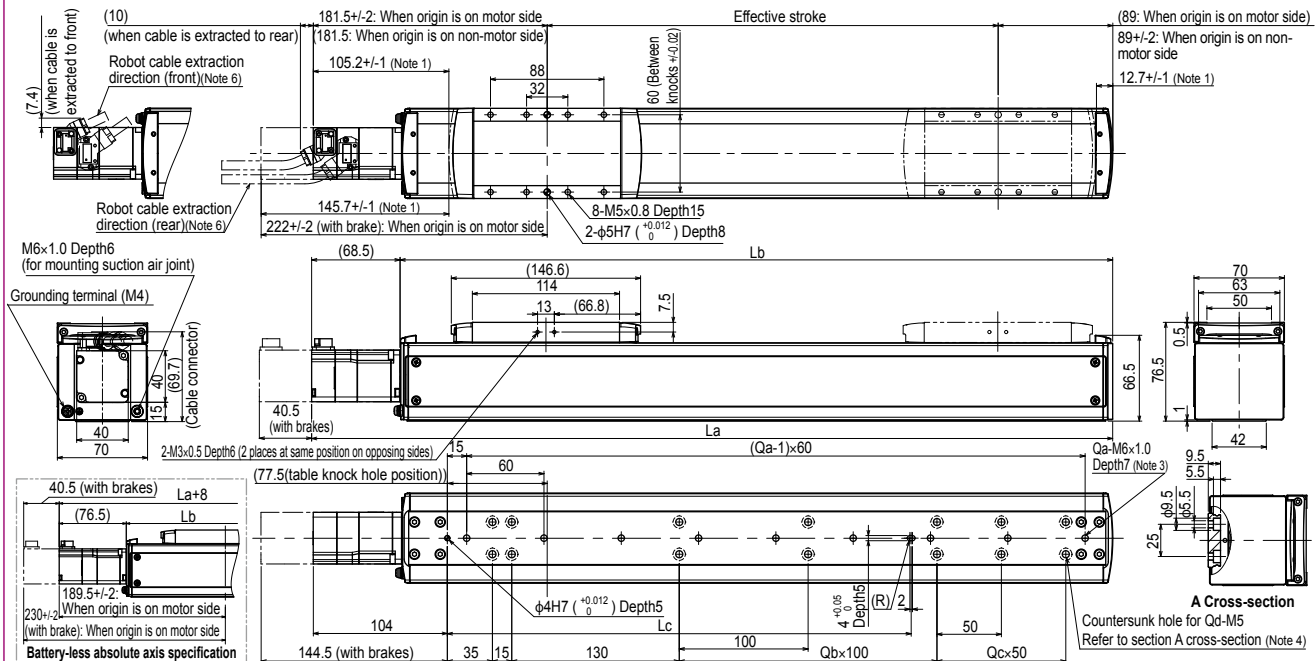

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	
La	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5	1070.5	1120.5	1170.5	1220.5	1270.5	1320.5	1370.5	
Lb	252	302	352	402	452	502	552	602	652	702	752	802	852	902	952	1002	1052	1102	1152	1202	1252	1302	
Lc	160	160	160	160	360	360	360	360	360	360	360	360	360	760	760	760	760	760	760	760	760	760	
Qa	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17	18	19	20	20	21	
Qb	0	0	0	0	2	2	2	2	2	2	2	2	2	6	6	6	6	6	6	6	6	6	
Qc	0	1	2	3	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	8	9	
Qd	6	8	10	12	10	12	14	16	18	20	22	24	18	20	22	24	26	28	30	32	34	36	
Weight (kg) ^{Note 5}	3.6	3.8	4.1	4.4	4.7	4.9	5.2	5.5	5.7	6	6.3	6.6	6.8	7.1	7.4	7.6	7.9	8.2	8.5	8.7	9	9.3	
Lead 30	1800																						
Lead 20	1200																						
Lead 10	600																						
Lead 5	300																						
Speed setting	-																						
Maximum speed (mm/sec)	-																						
Speed setting	85% 75% 65% 55% 50% 45% 40% 35%																						

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Adjustments are required when changing the return-to-origin direction. (The standard origin is on the motor side.)
 Note 3. When using the tap holes to mount the body, remove the set screws first.
 Note 4. When using the countersunk holes (section A cross-section) to mount the body, remove the cap from the inner side and then fix.
 Note 5. This is the weight without brakes. When brakes are mounted, the weight will be 0.2 kg heavier than the body weight given in the table.
 Note 6. The specifications of the robot cable will vary according to the extraction direction.
 Note 7. When secured in place, the minimum bending radius of the robot cable is R30.

GX10

Single-axis AC servo motor robot



Ordering method

GX10			EU				A10		
Model	Lead	Motor specification	Motor type ^{Note1}	Stroke	Cable length ^{Note2}	Cable entry location	Driver	Brake unit ^{Note3}	Absolute battery
30: 30mm 20: 20mm 10: 10mm 5: 5mm	S60: Standard / With no brake BK60: Standard / With brake BL60: Battery-less absolute / With no brake BKBL60: Battery-less absolute / With brake	100 to 1250 (50mm pitch)	R: From rear of motor F: From front of motor	R3: 3m R5: 5m R10: 10m	A10:YHX-A10-SET	V: With brake unit N: None	B: With absolute battery N: None		

Note 1. RoHS2 (EU) 2015/863 compliant motor
 Note 2. All robot cables are flexible cables. The robot cable dimensions drawing is provided on page 733.
 Note 3. The brake unit cannot be used with an external brake power input.

Specifications

Motor	60 □ / 200 W
Repeatability ^{Note 1}	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 15 (Class C5)
Stroke	100 mm to 1250 mm (50mm pitch)
Maximum speed ^{Note 2}	1800 mm/sec / 1200 mm/sec / 600 mm/sec / 300 mm/sec
Ball screw lead	30 mm / 20 mm / 10 mm / 5 mm
Maximum payload	25 kg / 40 kg / 80 kg / 100 kg
Rated thrust	113 N / 170 N / 341 N / 683 N
Maximum dimensions of cross section of main unit	W 100 mm × H 99.5 mm
Overall length (Horizontal)	ST + 245 mm
Overall length (Vertical)	ST + 285.5 mm
Degree of cleanliness ^{Note 3}	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air ^{Note 4}	30 N \dot{L} /min to 90 N \dot{L} /min
Controller	YHX series

Note 1. Positioning repeatability in one direction.
 Note 2. The maximum speed may not be reached if the travel distance is short or because of other operation conditions.
 If the effective stroke exceeds 700 mm, the ball screw may resonate. (Critical speed)
 At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.
 Note 3. When using in a clean environment, attach a suction air joint.
 The degree of cleanliness is the cleanliness when using at 1000 mm/sec or less.
 Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Static loading moment

	(Unit: N·m)		
MY	MP	MR	
274	274	241	

Allowable overhang

GX10-30	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
10kg	878 537 292	271 473 803	4135 4135
20kg	609 256 146	118 192 481	985 985
25kg	608 211 124	93 147 454	
GX10-20	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
15kg	1269 451 282	252 387 1159	2062 2062
25kg	754 253 158	123 189 629	1012 1012
40kg	466 142 88	51 78 311	750 750
GX10-10	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
30kg	1794 298 203	162 234 1623	1926 1926
50kg	1358 162 111	68 98 1060	931 931
80kg	1266 86 59	16 22 552	434 434
GX10-5	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
30kg	5605 321 225	181 258 5195	1018 1018
50kg	3694 177 124	79 113 3111	477 477
80kg	2619 95 67	22 31 1557	296 296
100kg	2224 68 48	0 0 0	

Note. Distance from center of slider upper surface to carrier center-of-gravity at a guide service life of 10,000 km.
 Note. Service life is calculated for 600mm stroke models.

Robot cable

R3R (3 m/extracted to rear)	Encoder cable + Power cable set model	KEV-M4710-30
R5R (5 m/extracted to rear)	Encoder cable + Power cable set model	KEV-M4710-50
R10R (10 m/extracted to rear)	Encoder cable + Power cable set model	KEV-M4710-A0
R3F (3 m/extracted to front)	Encoder cable + Power cable set model	KEV-M4720-30
R5F (5 m/extracted to front)	Encoder cable + Power cable set model	KEV-M4720-50
R10F (10 m/extracted to front)	Encoder cable + Power cable set model	KEV-M4720-A0
10A Spec.	Model	YHX-A10-SET
	Control method	Standard profile

Driver unit

GX10

157.5 \pm 0.2: When origin is on motor side
 (157.5: When origin is on non-motor side)
 79.5 \pm 0.1 (Note 1)
 87.5 \pm 0.2: When origin is on non-motor side
 (87.5: When origin is on motor side)
 9.5 \pm 0.1 (Note 1)

Robot cable extraction direction (front)(Note 6)
 Robot cable extraction direction (rear)(Note 6)

198 \pm 0.2 (with brake): When origin is on motor side

2-M6 \times 1.0 Depth6 (for mounting suction air joint)
 Grounding terminal (M4)
 40.5 (with brakes)
 60
 4.5
 79.2
 (Cable connector)
 2-M5 \times 0.8 Depth10 (2 places at same position on opposing sides)

165.5 \pm 0.2: When origin is on motor side
 206 \pm 0.2 (with brake): When origin is on motor side
 Battery-less absolute axis specification

Effective stroke

8-M5 \times 0.8 Depth9
 2- ϕ 4H7 (+0.012) Depth6
 2- ϕ 6H7 (+0.012) Depth8
 2- ϕ 10H7 (+0.015) Refer to section C cross-section
 Qc \times 200
 Qd \times 200
 Qa-M6 \times 1.0 Depth12
 COUNTERSUNK HOLE for Qb-M6 Refer to section C cross-section (Note4)

Detail of section A
 Detail of section B
 C cross-section

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Adjustments are required when changing the return-to-origin direction. (The standard origin is on the motor side.)
 Note 3. The length under head of the hex socket head bolts <M6 x 1.0> used to mount the body with the mounting countersunk holes (section C cross-section) must be <<20mm or more>>. The recommended length under head of the hex socket head bolts <M6 x 1.0> used to mount the body with the mounting tap hole specifications is <<frame thickness + 10 mm or less>>.
 Note 4. When using the mounting countersunk holes (section C cross-section) to mount the body, remove the seal, and then fix.
 Note 5. This is the weight without brakes. When brakes are mounted, the weight will be 0.5 kg heavier than the body weight given in the table.
 Note 6. The specifications of the robot cable will vary according to the extraction direction.
 Note 7. When secured in place, the minimum bending radius of the robot cable is R30.

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	
La	345	395	445	495	545	595	645	695	745	795	845	895	945	995	1045	1095	1145	1195	1245	1295	1345	1395	1445	1495	
Lb	275.5	325.5	375.5	425.5	475.5	525.5	575.5	625.5	675.5	725.5	775.5	825.5	875.5	925.5	975.5	1025.5	1075.5	1125.5	1175.5	1225.5	1275.5	1325.5	1375.5	1425.5	
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	
Ld	0	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	
Qa	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20	
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	
Qc	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	
Weight (kg) ^{Note 5}	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.9	10.4	10.9	11.4	11.9	12.4	12.9	13.4	13.9	14.4	14.9	15.4	15.9	16.4	16.9	
Maximum speed	Lead 30	1800																							
	Lead 20	1200																							
	Lead 10	600																							
	Lead 5	300																							
	Speed setting	-																							

GX12

Single-axis AC servo motor robot



Ordering method

GX12			EU				A30		
Model	Lead	Motor specification	Motor type ^{Note1}	Stroke	Cable length ^{Note2}	Cable entry location	Driver	Brake unit ^{Note3}	Absolute battery
	30: 30mm 20: 20mm 10: 10mm 5: 5mm	S60: Standard / With no brake BK60: Standard / With brake BL60: Battery-less absolute / With no brake BKBL60: Battery-less absolute / With brake		100 to 1250 (50mm pitch)	R3: 3m R5: 5m R10: 10m	R: From rear of motor F: From front of motor	A30:YHX-A30-SET	V: With brake unit N: None	B: With absolute battery N: None

Note 1. RoHS2 (EU) 2015/863 compliant motor
 Note 2. All robot cables are flexible cables. The robot cable dimensions drawing is provided on page 733.
 Note 3. The brake unit cannot be used with an external brake power input.

Specifications

Motor	60 □ / 400 W
Repeatability ^{Note 1}	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 15 (Class C5)
Stroke	100 mm to 1250 mm (50mm pitch)
Maximum speed ^{Note 2}	1800 mm/sec / 200 mm/sec / 600 mm/sec / 300 mm/sec
Ball screw lead	30 mm 20 mm 10 mm 5 mm
Maximum payload	Horizontal 35 kg 50 kg 95 kg 115 kg Vertical 8 kg 15 kg 25 kg 45 kg
Rated thrust	225 N 339 N 678 N 1360 N
Maximum dimensions of cross section of main unit	W 125 mm x H 101 mm
Overall length (Horizontal)	ST + 297 mm
Overall length (Vertical)	ST + 337.5 mm
Degree of cleanliness ^{Note 3}	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air ^{Note 4}	30 N ℓ /min to 90 N ℓ /min
Controller	YHX series

Note 1. Positioning repeatability in one direction.
 Note 2. The maximum speed may not be reached if the travel distance is short or because of other operation conditions.
 If the effective stroke exceeds 700 mm, the ball screw may resonate. (Critical speed)
 At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.
 Note 3. When using in a clean environment, attach a suction air joint.
 The degree of cleanliness is the cleanliness when using at 1000 mm/sec or less.
 Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Static loading moment


	MY	MP	MR
	334	334	294

(Unit: N·m)

Allowable overhang Note

GX12-30	GX12-20	GX12-10	GX12-5
Horizontal installation (Unit: mm)	Horizontal installation (Unit: mm)	Horizontal installation (Unit: mm)	Horizontal installation (Unit: mm)
10kg 1796 1074 637	15kg 2231 904 613	30kg 3109 607 456	30kg 11079 653 504
20kg 1300 531 332	30kg 1290 428 293	50kg 2421 345 260	50kg 7434 373 288
35kg 1341 334 227	50kg 882 237 164	80kg 2417 198 150	80kg 5458 215 166
		95kg 2559 159 121	115kg 4364 136 105
Wall installation (Unit: mm)	Wall installation (Unit: mm)	Wall installation (Unit: mm)	Wall installation (Unit: mm)
10kg 631 1009 1720	15kg 591 839 2141	30kg 413 542 2978	30kg 456 588 10692
20kg 316 466 1171	30kg 260 363 1167	50kg 215 280 2208	50kg 239 308 6935
35kg 197 269 1130	50kg 126 172 710	80kg 103 133 1927	80kg 117 150 4713
		95kg 73 95 1830	115kg 55 71 3221
Vertical installation (Unit: mm)	Vertical installation (Unit: mm)	Vertical installation (Unit: mm)	Vertical installation (Unit: mm)
3kg 2642 2642	5kg 2424 2424	10kg 1862 1862	15kg 1332 1332
6kg 1289 1289	10kg 1207 1207	15kg 803 803	30kg 634 634
8kg 951 951	15kg 803 803		45kg 402 402

GX12

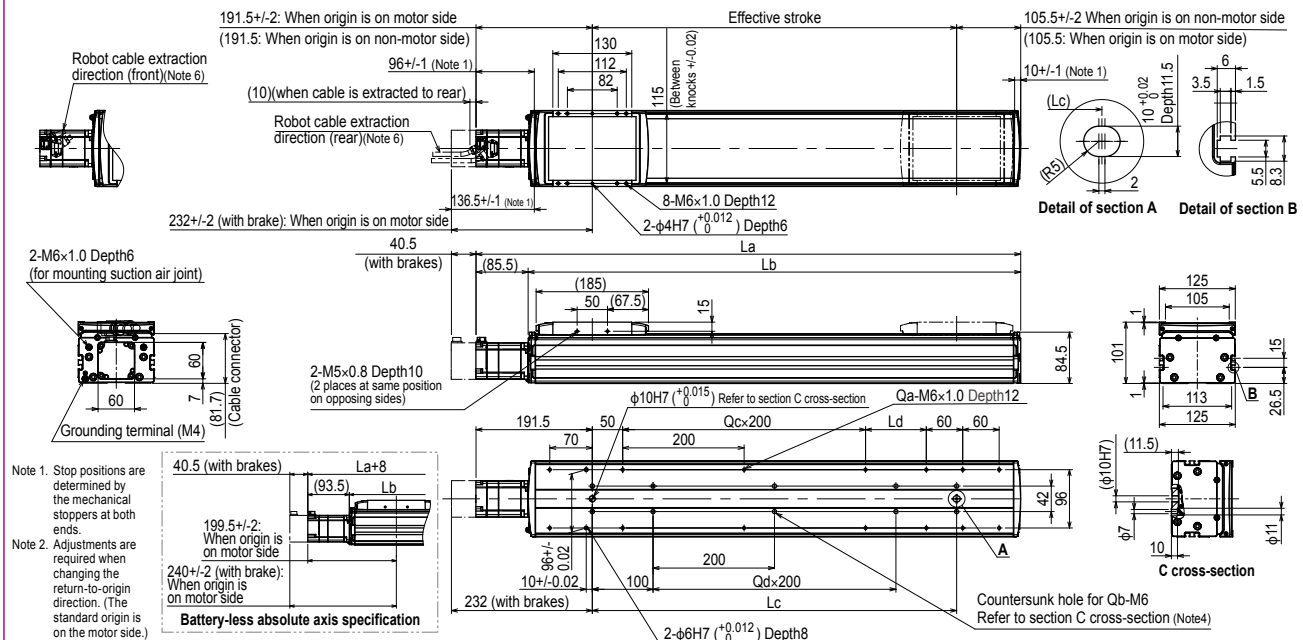

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
La	397	447	497	547	597	647	697	747	797	847	897	947	997	1047	1097	1147	1197	1247	1297	1347	1397	1447	1497	1547
Lb	311.5	361.5	411.5	461.5	511.5	561.5	611.5	661.5	711.5	761.5	811.5	861.5	911.5	961.5	1011.5	1061.5	1111.5	1161.5	1211.5	1261.5	1311.5	1361.5	1411.5	1461.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
Ld	0	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
Qa	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16
Qc	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5
Weight (kg) ^{Note 5}	7.6	8.2	8.9	9.6	10.2	10.9	11.6	12.3	12.9	13.6	14.3	15	15.6	16.3	17	17.6	18.3	19	19.7	20.3	21	21.7	22.4	23
Lead 30	1800																							
Lead 20	1200																							
Lead 10	600																							
Lead 5	300																							
Speed setting	-																							
Maximum speed (mm/sec)	1530	1350	1170	990	900	810	720	630	540	450	360	300	250	200	150	120	100	80	60	48	42	36	30	25
	1020	900	780	660	600	540	480	420	360	300	240	200	150	120	100	80	75	60	50	45	40	35	30	25
	510	450	390	330	300	270	240	210	180	150	120	100	80	75	60	50	45	36	30	27	24	21	18	15
	255	225	195	165	150	135	120	105	90	75	60	50	45	36	30	27	24	18	15	135	120	105	90	75
	85%	75%	65%	55%	50%	45%	40%	35%	30%	25%														

Note 3. The length under head of the hex socket head bolts <M6 x 1.0> used to mount the body with the mounting countersunk holes (section C cross-section) must be <<20mm or more>>. The recommended length under head of the hex socket head bolts <M6 x 1.0> used to mount the body with the mounting tap hole specifications is <<frame thickness + 10 mm or less>>.
 Note 4. When using the mounting countersunk holes (section C cross-section) to mount the body, remove the seal, and then fix.
 Note 5. This is the weight without brakes. When brakes are mounted, the weight will be 0.5 kg heavier than the body weight given in the table.
 Note 6. The specifications of the robot cable will vary according to the extraction direction.
 Note 7. When secured in place, the minimum bending radius of the robot cable is R30.

GX16

Single-axis AC servo motor robot



Ordering method

GX16			EU				A30		
Model	Lead	Motor specification	Motor type ^{Note1}	Stroke	Cable length ^{Note2}	Cable entry location	Driver	Brake unit ^{Note3}	Absolute battery
	40: 40mm 20: 20mm 10: 10mm	S80: Standard / With no brake 20: 20mm BK80: Standard / With brake BL80: Battery-less absolute / With no brake BKBL80: Battery-less absolute / With brake		100 to 1450 (50mm pitch)	R3: 3m R5: 5m R10: 10m	R: From rear of motor F: From front of motor	A30:YHX-A30-SET	V: With brake unit N: None	B: With absolute battery N: None

Note 1. RoHS2 (EU) 2015/863 compliant motor
 Note 2. All robot cables are flexible cables. The robot cable dimensions drawing is provided on page 733.
 Note 3. The brake unit cannot be used with an external brake power input.

Specifications

Motor	80 □ / 750 W
Repeatability ^{Note 1}	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 20 (Class C5)
Stroke	100 mm to 1450 mm (50mm pitch)
Maximum speed ^{Note 2}	2400 mm/sec/1200 mm/sec/600 mm/sec
Ball screw lead	40 mm 20 mm 10 mm
Maximum payload	Horizontal 45 kg 95 kg 130 kg Vertical 12 kg 28 kg 55 kg
Rated thrust	320 N 640 N 1280 N
Maximum dimensions of cross section of main unit	W 160 mm × H 130 mm
Overall length (Horizontal)	ST + 339.5 mm
Overall length (Vertical)	ST + 386.5 mm
Degree of cleanliness ^{Note 3}	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air ^{Note 4}	30 N \dot{L} /min to 90 N \dot{L} /min
Controller	YHX series

Note 1. Positioning repeatability in one direction.
 Note 2. The maximum speed may not be reached if the travel distance is short or because of other operation conditions.
 If the effective stroke exceeds 800 mm, the ball screw may resonate. (Critical speed)
 At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.
 Note 3. When using in a clean environment, attach a suction air joint.
 The degree of cleanliness is the cleanliness when using at 1000 mm/sec or less.
 Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Static loading moment

MY	MP	MR
706	706	620

(Unit: N·m)

Allowable overhang Note

GX16-40			
Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)	
A	B	C	
15kg 2876	1866 1253	15kg 1273 1802 2797	3kg 6605 6605
30kg 2385	997 776	30kg 782 935 2263	6kg 3699 3699
45kg 2339	720 604	45kg 598 658 2174	12kg 2827 2827

GX16-20			
Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)	
A	B	C	
30kg 3862	1255 1106	30kg 1102 1192 3742	10kg 3404 3404
50kg 2568	733 652	50kg 630 671 2422	20kg 1740 1740
80kg 1798	440 394	80kg 360 377 1612	28kg 1504 1504
95kg 1579	362 325	95kg 288 300 1373	

GX16-10			
Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)	
A	B	C	
50kg 6253	1026 1024	50kg 980 964 6089	15kg 3434 3434
80kg 4447	623 624	80kg 573 561 4240	30kg 1684 1684
100kg 3957	489 490	100kg 437 426 3706	55kg 889 889
130kg 3786	365 367	130kg 312 302 3422	

Note. Distance from center of slider upper surface to carrier center-of-gravity at a guide service life of 10,000 km.
 Note. Service life is calculated for 600mm stroke models.


Robot cable

R3R (3 m/extracted to rear)	Encoder cable + Power cable set model	KEX-M4710-30
R5R (5 m/extracted to rear)	Encoder cable + Power cable set model	KEX-M4710-50
R10R (10 m/extracted to rear)	Encoder cable + Power cable set model	KEX-M4710-A0
R3F (3 m/extracted to front)	Encoder cable + Power cable set model	KEX-M4720-30
R5F (5 m/extracted to front)	Encoder cable + Power cable set model	KEX-M4720-50
R10F (10 m/extracted to front)	Encoder cable + Power cable set model	KEX-M4720-A0

Driver unit

30A Spec.	Model	YHX-A30-SET
	Control method	Standard profile

GX16

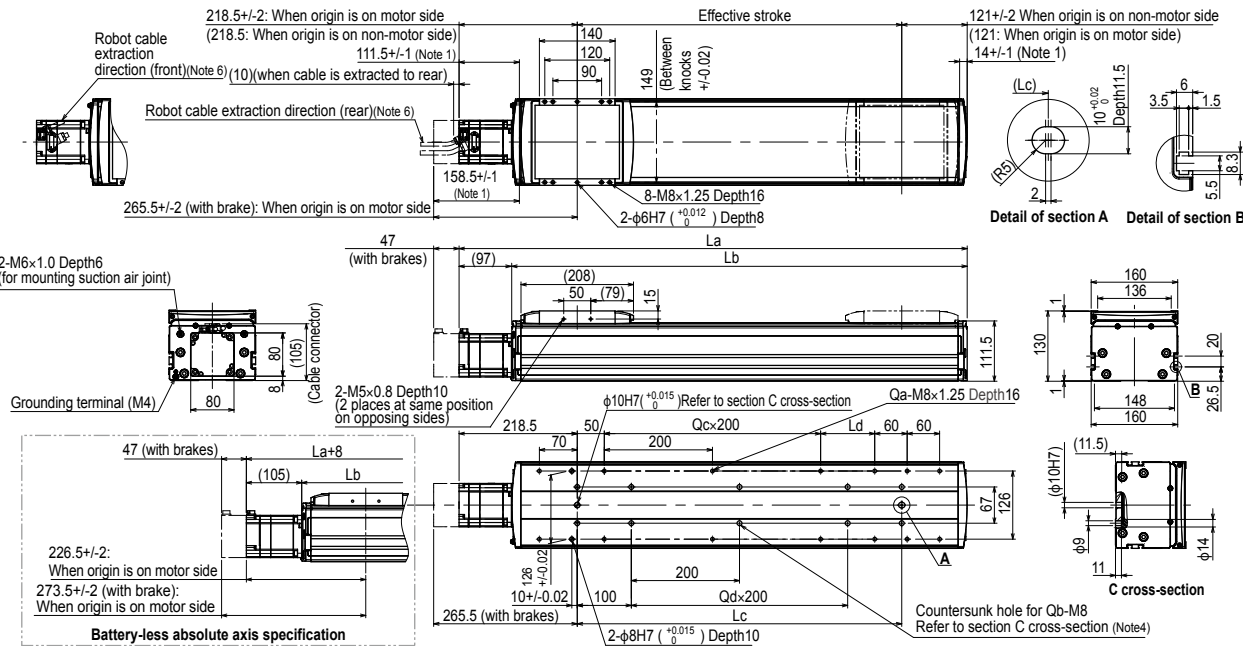

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Adjustments are required when changing the return-to-origin direction. (The standard origin is on the motor side.)
 Note 3. The length under head of the hex socket head bolts <M8 x 1.25> used to mount the body with the mounting countersunk holes (section C cross-section) must be <<25mm or more>>. The recommended length under head of the hex socket head bolts <M8 x 1.25> used to mount the body with the mounting tap hole specifications is <<frame thickness + 15 mm or less>>.
 Note 4. When using the mounting countersunk holes (section C cross-section) to mount the body, remove the seal, and then fix.
 Note 5. This is the weight without brakes. When brakes are mounted, the weight will be 1.1 kg heavier than the body weight given in the table.
 Note 6. The specifications of the robot cable will vary according to the extraction direction.
 Note 7. When secured in place, the minimum bending radius of the robot cable is R30.

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450								
La	439.5	489.5	539.5	589.5	639.5	689.5	739.5	789.5	839.5	889.5	939.5	989.5	1039.5	1089.5	1139.5	1189.5	1239.5	1289.5	1339.5	1389.5	1439.5	1489.5	1539.5	1589.5	1639.5	1689.5	1739.5	1789.5								
Lb	342.5	392.5	442.5	492.5	542.5	592.5	642.5	692.5	742.5	792.5	842.5	892.5	942.5	992.5	1042.5	1092.5	1142.5	1192.5	1242.5	1292.5	1342.5	1392.5	1442.5	1492.5	1542.5	1592.5	1642.5	1692.5								
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450								
Ld	0	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150								
Qa	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	18	18	18	18	18	18	20	20	20	22	22	22								
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	16	16	16	16	18	18	18								
Qc	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	3	4	4	4	4	5	5	5	6	6	6								
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6								
Weight (kg) ^{Note 5}	13.9	14.9	15.9	16.9	17.9	18.8	19.8	20.8	21.8	22.8	23.7	24.7	25.7	26.7	27.7	28.7	29.6	30.6	31.6	32.6	33.6	34.6	35.5	36.5	37.5	38.5	39.5	40.4								
Maximum speed	Lead 40	2400																																		
	Lead 20	1200																																		
	Lead 10	600																																		
	Speed setting	-																																		
		2160	1920	1680	1440	1320	1200	1080	960	840	720	660	600	540	480	420	360	330	300	270	240	210	180	150	120	90	80	70	60	55	50	45	40	35	30	25

GX20

Single-axis AC servo motor robot



Ordering method

GX20			EU				A30		
Model	Lead	Motor specification	Motor type ^{Note1}	Stroke	Cable length ^{Note2}	Cable entry location	Driver	Brake unit ^{Note3}	Absolute battery
	40: 40mm 20: 20mm 10: 10mm	S80: Standard / With no brake BK80: Standard / With brake BL80: Battery-less absolute / With no brake BKBL80: Battery-less absolute / With brake		100 to 1450 (50mm pitch)	R: 3m R5: 5m R10: 10m	R: From rear of motor F: From front of motor	A30:YXH-A30-SET	V: With brake unit N: None	B: With absolute battery N: None

Note 1. RoHS2 (EU) 2015/863 compliant motor
 Note 2. All robot cables are flexible cables. The robot cable dimensions drawing is provided on page 733.
 Note 3. The brake unit cannot be used with an external brake power input.

Specifications

Motor	80 □ / 750 W
Repeatability ^{Note 1}	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 20 (Class C5)
Stroke	100 mm to 1450 mm (50mm pitch)
Maximum speed ^{Note 2}	2400 mm/sec/1200 mm/sec/600 mm/sec
Ball screw lead	40 mm 20 mm 10 mm
Maximum payload	Horizontal 65 kg 130 kg 160 kg Vertical 15 kg 35 kg 65 kg
Rated thrust	320 N 640 N 1280 N
Maximum dimensions of cross section of main unit	W 200 mm x H 140 mm
Overall length (Horizontal)	ST + 385.5 mm
Overall length (Vertical)	ST + 432.5 mm
Degree of cleanliness ^{Note 3}	ISO CLASS 3 (ISO14644-1) or equivalent
Inlet air ^{Note 4}	30 N \dot{L} /min to 90 N \dot{L} /min
Controller	YXH-SET

Note 1. Positioning repeatability in one direction.
 Note 2. The maximum speed may not be reached if the travel distance is short or because of other operation conditions.
 If the effective stroke exceeds 800 mm, the ball screw may resonate. (Critical speed)
 At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.
 Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness when using at 1000 mm/sec or less.
 Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Static loading moment

MY	MP	MR
1423	1423	1251

(Unit: N·m)

Allowable overhang ^{Note}

GX20-40	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
20kg	5318 2821 2096	2171 2751 5211	8187 8187
40kg	4836 1609 1369	1417 1539 4667	5203 5203
65kg	4824 1088 1001	1013 1018 4575	4810 4810

GX20-20	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
50kg	5436 1493 1377	1390 1423 5265	3436 3436
80kg	4417 911 854	849 841 4253	2600 2600
100kg	4592 756 727	708 686 4253	3073 3073
130kg	4338 596 584	550 526 3933	

GX20-10	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
40kg	22519 2607 2713	2704 2537 22210	5157 5157
80kg	16716 1274 1331	1293 1204 16141	2553 2553
120kg	14066 830 868	818 760 13223	1600 1600
160kg	12284 608 637	580 538 11190	

Note. Distance from center of slider upper surface to carrier center-of-gravity at a guide service life of 10,000 km.
 Note. Service life is calculated for 600mm stroke models.

Robot cable

R3R (3 m/extracted to rear)	
Encoder cable + Power cable set model	KEX-M4710-30

R5R (5 m/extracted to rear)	
Encoder cable + Power cable set model	KEX-M4710-50

R10R (10 m/extracted to rear)	
Encoder cable + Power cable set model	KEX-M4710-A0

R3F (3 m/extracted to front)	
Encoder cable + Power cable set model	KEX-M4720-30


R5F (5 m/extracted to front)	
Encoder cable + Power cable set model	KEX-M4720-50

R10F (10 m/extracted to front)	
Encoder cable + Power cable set model	KEX-M4720-A0

Driver unit

30A Spec.	Model	YXH-A30-SET
	Control method	Standard profile

GX20







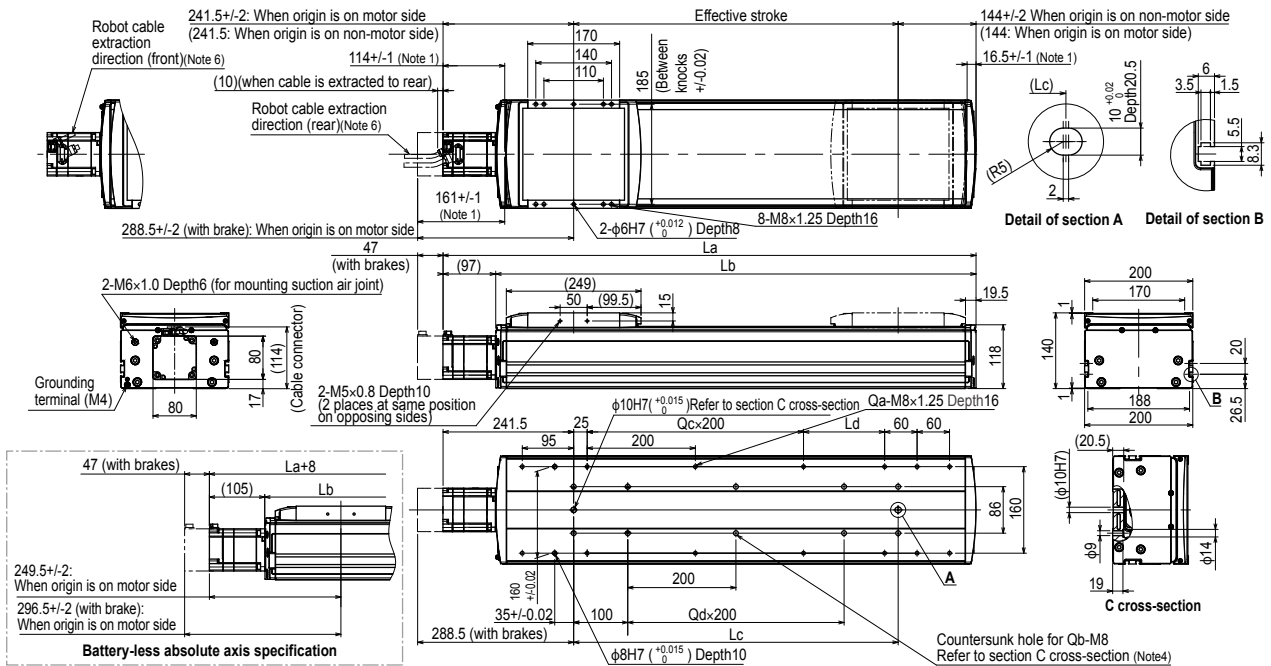


Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. Adjustments are required when changing the return-to-origin direction. (The standard origin is on the motor side.)
 Note 3. The length under head of the hex socket head bolts <M8 x 1.25> used to mount the body with the mounting countersunk holes (section C cross-section) must be <<25mm or more>>. The recommended length under head of the hex socket head bolts <M8 x 1.25> used to mount the body with the mounting tap hole specifications is <<frame thickness + 15 mm or less>>.
 Note 4. When using the mounting countersunk holes (section C cross-section) to mount the body, remove the seal, and then fix.
 Note 5. This is the weight without brakes. When brakes are mounted, the weight will be 1.1 kg heavier than the body weight given in the table.
 Note 6. The specifications of the robot cable will vary according to the extraction direction.
 Note 7. When secured in place, the minimum bending radius of the robot cable is R30.

Effective stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
La	485.5	535.5	585.5	635.5	685.5	735.5	785.5	835.5	885.5	935.5	985.5	1035.5	1085.5	1135.5	1185.5	1235.5	1285.5	1335.5	1385.5	1435.5	1485.5	1535.5	1585.5	1635.5	1685.5	1735.5	1785.5	1835.5
Lb	388.5	438.5	488.5	538.5	588.5	638.5	688.5	738.5	788.5	838.5	888.5	938.5	988.5	1038.5	1088.5	1138.5	1188.5	1238.5	1288.5	1338.5	1388.5	1438.5	1488.5	1538.5	1588.5	1638.5	1688.5	1738.5
Lc	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450
Ld	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400
Qa	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	20	20	22	22	22	22
Qb	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	14	14	14	14	14	14	16	16	16	16	18	18
Qc	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
Qd	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6
Weight (kg) ^{Note 5}	19.4	20.7	22	23.3	24.6	25.9	27.2	28.5	29.8	31	32.3	33.6	34.9	36.2	37.5	38.8	40.1	41.4	42.6	43.9	45.2	46.5	47.8	49.1	50.4	51.7	53	54.2
Lead 40	2400																2160	1920	1680	1440	1320	1200	1080	960	840	720	600	
Lead 20	1200																1080	960	840	720	660	600	540	480	420	360	300	
Lead 10	600																540	480	420	360	330	300	270	240	210	180	150	
Speed setting	-																90%	80%	70%	60%	55%	50%	45%	40%	35%	30%	25%	

GX series

Reference drawing for mounting bending unit (example of right side mounting)

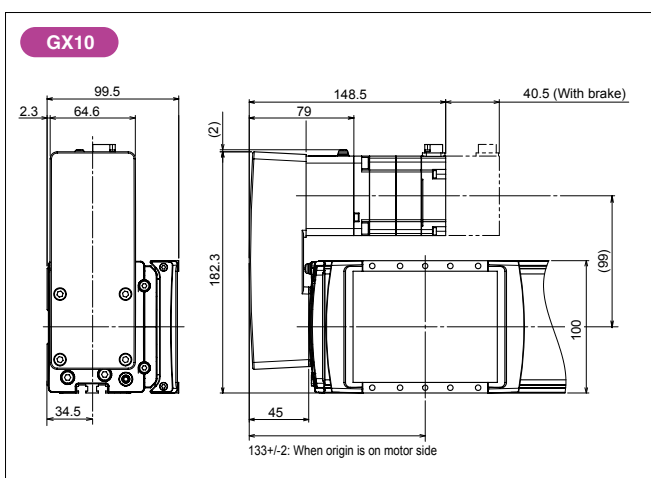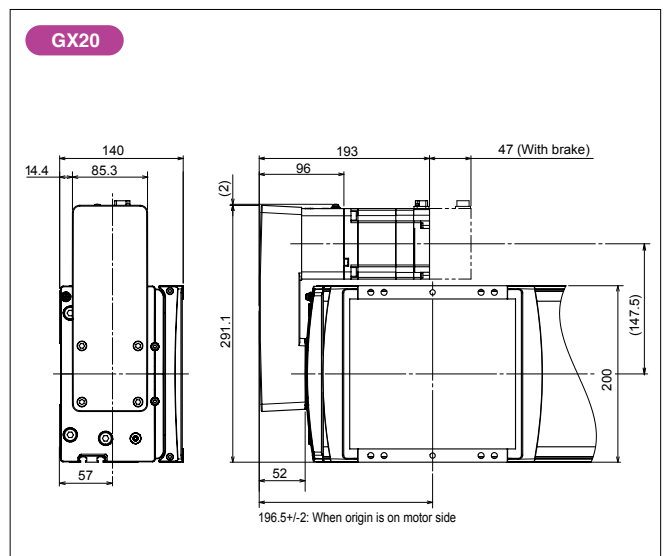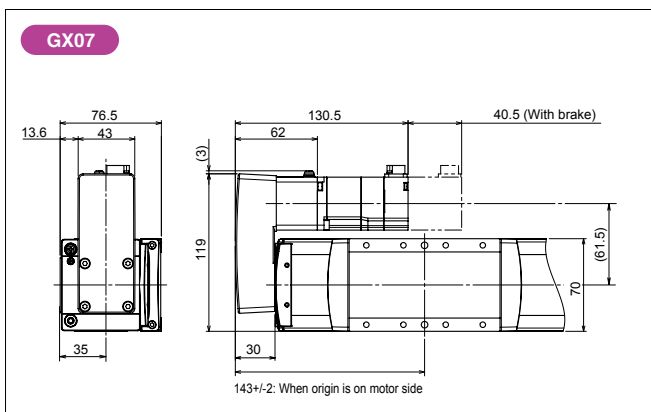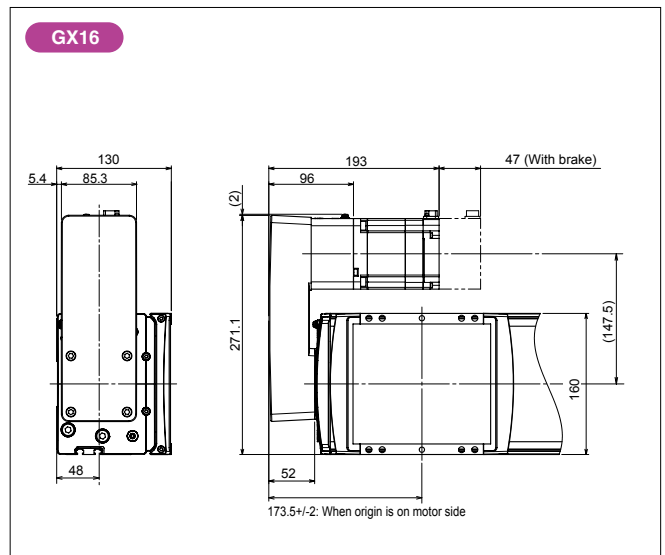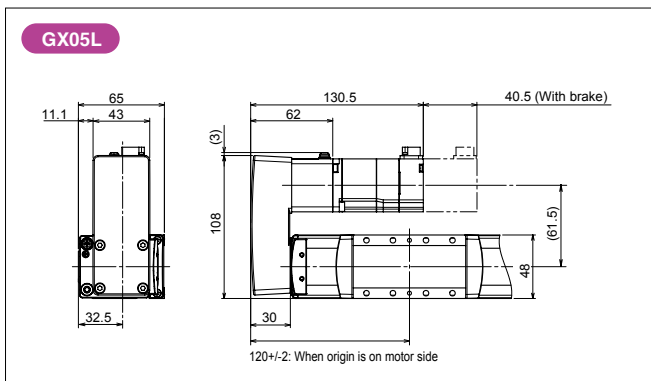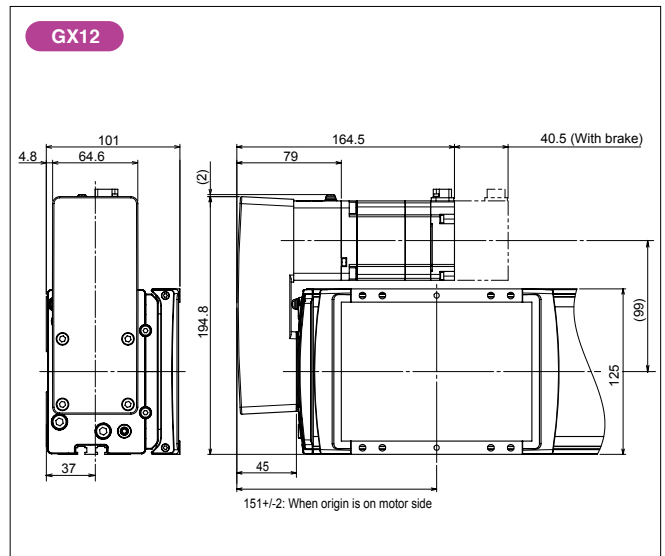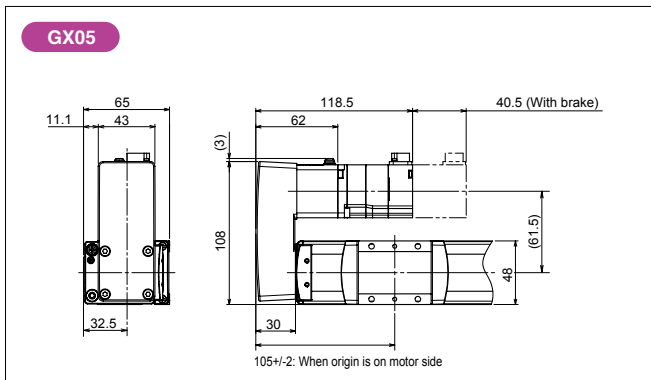

- *1. Mount the bending unit onto the body. Refer to the user's Manual for details on mounting.
- *2. The motor is not enclosed with the bending unit. Remove the motor from the robot body, and mount the bending unit.
- *3. The bending unit can be mounted on the right or left sides.

Model	Product model	Part No.	Weight
GX05, GX05L, GX07	GX-BEND-40	KES-M221M-00	0.4kg
GX10, GX12	GX-BEND-60	KEV-M221M-00	1.2kg
GX16, GX20	GX-BEND-80	KEX-M221M-00	2.7kg

Articulated robots YA
 Linear conveyor modules LCM
 Single-axis robots GX
 Motor-less single axis actuator Robonity
 Compact single-axis robots TRANSEVO
 Single-axis robots FLIP-X
 Linear motor PHASER
 Cartesian robots XY-X
 SCARA robots YK-X
 Pick & place robots YP-X
 CLEAN
 CONTROLLER
 INFORMATION

Articulated robots YA	Linear conveyor modules LCM	Single-axis robots GX	Motor-less single axis actuator Robonity	Compact single-axis robots TRANSEVO	Single-axis robots FLIP-X	Linear motor single-axis robots PHASER	Cartesian robots XY-X	SCARA robots YK-X	Pick & place robots YP-X	CLEAN	CONTROLLER	INFORMATION
---------------------------------	---------------------------------------	---------------------------------	--	---	-------------------------------------	--	---------------------------------	-----------------------------	------------------------------------	--------------	-------------------	--------------------