

YAMAHA U-MAX MEDIUM DUTY I GAS UTILITY VEHICLE



Shown with optional suntop.

Not only does the Yamaha U-MAX Medium Duty I Utility Vehicle carry a large payload, it also carries quite a reputation. The latest in a long line of precision engineered utility vehicles from Yamaha, the U-MAX sets the standard for others to follow.

The heart of the U-MAX Medium Duty I is the reliable 357 cc 4-stroke gas engine, designed and built by Yamaha. It produces a class leading 11.4 horsepower of work handling muscle. Muscle enough to handle the 800 pound payload capacity and 1300 pound tow capacity.*

Packed with standard features like 4 wheel mechanical drum brakes, a DC power outlet, headlights and tail lights, the U-MAX is not only a great vehicle, it's a great value.

If you're in the market for a versatile utility vehicle that you can depend on, contact us at 866-747-4027 or visit us on the web at www.yamahagolfcar.com.

* Including occupants, vehicle cargo and trailer cargo on level ground.




The U-Max comes with a tough tested headlight assembly that can be found on many Yamaha ATV's.




Self adjusting drum brakes on all 4 wheels allow you to stop and work anywhere.



The utility dump bed comes with a folding tailgate, prop rod and hydraulic shock. Power dump optional.

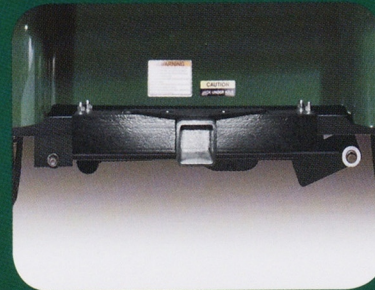

The standard 2 inch receiver accommodates multiple accessories.

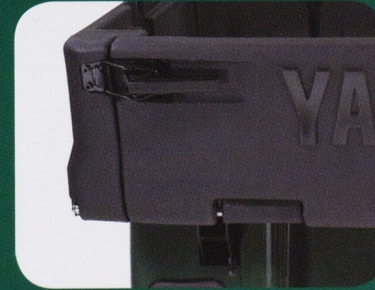

You'll appreciate the low loading height of our bed and the rattle free positive locking tailgate.



YAMAHA U-MAX MEDIUM DUTY I GAS VEHICLE SPECIFICATIONS

DIMENSIONS / OTHER	LENGTH	114.8 in. (2915 mm)
	WIDTH	48.9 in. (1243 mm)
	HEIGHT	47.2 in. (1200 mm)
	WHEELBASE	74.8 in. (1900 mm)
	GROUND CLEARANCE	4.5 in. (115 mm)
	FUEL TANK CAPACITY	7.9 U.S. gal (30.0 L)
	CARGO BED TYPE	Roto-molded bed w/ hydraulic-assisted tilt and fold & lock tailgate.
	CARGO BED PAYLOAD CAPACITY	800 lb. (363 kg)
	CARGO BED SIZE (LxWxH)	42.4 in (1077 mm) x 44.2 in (1123 mm) x 9.0 in (229 mm)
	CARGO BED LOAD HEIGHT (Unloaded)	27.2 in (690 mm)
	DRY WEIGHT	851 lb. (386 kg)
	MAXIMUM SPEED	15 mph (24 km/h)
	MINIMUM TURNING RADIUS	129.9 in. (3.3 m)
	FRONT TIRES	18 x 8.5 - 8 (4 PLY)
REAR TIRES	18 x 8.5 - 8 (6 PLY)	
WARRANTY	1 year limited	
POWER TRAIN	ENGINE TYPE	Yamaha purpose built, single cylinder 60° incline OHV.
	DISPLACEMENT	357 cc
	HORSEPOWER	11.4 hp (8.5 Kw @ 3500 rpm)
	CARBURETOR	MIKUNI BV26-18
	AIR CLEANER	High-capacity pleated paper with foam urethane pre-cleaner.
	IGNITION	Maintenance-free, transistor-magneto ignition.
	BATTERY	12 volt, 450 cca @ 0° F (-18° C), 75 min. reserve capacity.
	TRANSMISSION	Continuously variable, forward/reverse V-belt automatic transaxle.
	BRAKES	Self adjusting, mechanical drum brakes on all four wheels.
	FRAME	Robotic welded, tubular steel protected by an 18 step paint process.
CHASSIS	FRONT BODY	Custom formulated, color matched thermoplastic olefin, painted with a two-part topcoat of high-luster, automotive grade polyurethane.
	REAR BODY	Vacuum-formed ABS plastic coated with tough UV resistant Solarkote.
	LIGHTING	Tail lights and dual 30W Krypton multi-reflector headlights.
	TRAILER HITCH	Standard 2 inch receiver.
	BUMPERS	Yamaha's 5 mph energy-absorbing front bumper.
	STEERING TYPE	Adjustable worm gear and pitman pin system, permanently lubricated.
	FRONT SUSPENSION	Independent suspension with individual coil springs and hydraulic shock absorbers.
	REAR SUSPENSION	Mono-link rear suspension with coil springs and hydraulic shock absorbers.

STANDARD FEATURES

	EZ-GO MPT 1200	ClubCar Carryall 2	Yamaha U-MAX MD I
Head Lights	X	X	✓
Tail Lights	X	X	✓
Independent Front Strut Suspension	X	X	✓
2" Receiver Hitch	X	X	✓
DC Power Outlet	X	X	✓
7.9 gal Fuel Tank	X	X	✓
1300 lb Towing Capacity*	X	X	✓
4-Wheel Brakes	X	✓	✓

** U-MAX MD I has more standard features.*

* Including occupants, vehicle cargo and trailer cargo on level ground.

Specifications subject to change without notice.

© 2004 Yamaha Golf-Car Company